




*Catalogue 2019*  
*Design & Architectural collections*


## Index

|             |                               |     |                                  |         |   |
|-------------|-------------------------------|-----|----------------------------------|---------|---|
| <i>pag.</i> |                               |     |                                  |         |   |
| 14          | Bic B02                       | 50  | Nelly                            | 162     | Pop P07 bi-color Ø6,0                     |
| 18          | Bic B07                       | 52  | Nemo                             | 163     | Pop P07 bi-color Ø12,0                    |
| 19          | Bic B12                       | 55  | Pop Bijou                        | 164     | Pop P07 Bulb                              |
| 20          | Bic B16                       | 72  | Pop Bon Bon                      | 170     | Pop P07 Dynamic Ø12,5                     |
| 21          | Bic B25-B50-B60               | 219 | Pop Brooklyn                     | 160     | Pop P07 mono-color Ø6,0 - Ø12,0           |
| 196         | Binari 230V                   | 59  | Pop C'est Moi                    | 171     | Pop P07 Pull Ø12,5                        |
| 197         | Binari 48V                    | 63  | Pop C'est Toi                    | 172     | Pop P10                                   |
| 24          | Box                           | 69  | Pop Chapeau                      | 173     | Pop P11                                   |
| 22          | Brick                         | 66  | Pop Chérie                       | 174     | Pop P12 Ø3,0                              |
| 27          | Club C1 bi - color            | 205 | Pop Host bi-color Ø32,0          | 176     | Pop P12 L Ø3,0                            |
| 26          | Club C1 mono - color          | 206 | Pop Host bi-color Ø80,0          | 175     | Pop P12 T Ø3,0                            |
| 28          | Club C2 mono - color          | 211 | Pop Host L/M - T/N               | 117     | Pop P12 K Ø3,0                            |
| 29          | Club C3 mono - color          | 201 | Pop Host mono-color Ø32,0        | 178     | Pop P12 Ø7,0                              |
| 80          | Easy Pop P00 Ø3,0             | 202 | Pop Host mono-color Ø80,0        | 179     | Pop P12 Ø12,5                             |
| 81          | Easy Pop P00 NaNo Ø3,0        | 208 | Pop Host W Ø32,0 - Ø80,0         | 181     | Pop P12 Cup Ø3,0                          |
| 93          | Easy Pop P01 Bulb             | 217 | Pop P120 - P200                  | 183     | Pop P12 Cup Ø6,0                          |
| 83          | Easy Pop P01 Ø4,0             | 78  | Pop P00 Ø3,0                     | 185     | Pop P12 Cup Ø12,0                         |
| 88          | Easy Pop P01 Ø5,5             | 79  | Pop P00 NaNo Ø3,0                | 180     | Pop P12 Ring Ø3,0                         |
| 90          | Easy Pop P01 NaNo Ø5,5        | 82  | Pop P01 Ø4,0                     | 182     | Pop P12 Ring Ø6,0                         |
| 99          | Easy Pop P02 Ø5,5             | 92  | Pop P01 Bulb                     | 184     | Pop P12 Ring Ø12,0                        |
| 106         | Easy Pop P03 Ø8,0             | 84  | Pop P01 Ø5,5                     | 150     | Pop Ring Static Ø7,0                      |
| 108         | Easy Pop P03 NaNo Ø8,0        | 86  | Pop P01 NaNo Ø5,5                | 151     | Pop Ring Static Ø13,1                     |
| 139         | Easy Pop P04 Ø8,0             | 97  | Pop P01 Dynamic Ø12,5            | 152-153 | Pop Ring Dynamic Ø13,1                    |
| 114         | Easy Pop PX3 Ø10,0            | 94  | Pop P01 Static Ø12,5             | 154     | Pop Ring Pull Ø12,5                       |
| 116         | Easy Pop PX3 NaNo Ø10,0       | 98  | Pop P02 Ø5,5                     | 223     | Pop Up 1                                  |
| 120         | Easy Pop PY3 Ø10,0            | 100 | Pop P03 Ø6,0                     | 224     | Pop Up 207                                |
| 121         | Easy Pop PY3 NaNo Ø10,0       | 101 | Pop P03 NaNo Ø6,0                | 188     | Pop P13 Ø7,0                              |
| 124         | Easy Pop PY3 Ø10,0 Glass      | 102 | Pop P03 Ø8,0                     | 189     | Pop P13 Ø12,5                             |
| 125         | Easy Pop PY3 NaNo Ø10,0 Glass | 104 | Pop P03 NaNo Ø8,0                | 190     | Pop P14 Ø3,0                              |
| 129         | Easy Pop PZ3 Ø10,0            | 130 | Pop P03 Ø17,0                    | 190     | Pop P14 Ø7,0                              |
| 31          | e-Pad                         | 135 | Pop P03 Look Ø17,0               | 191     | Pop P14 Ø12,5                             |
| 32          | J&B                           | 132 | Pop P03 Static Ø17,0             | 192     | Pop P15 Ø3,0                              |
| 34          | J&J                           | 133 | Pop P03 Wall Wash Ø17,0          | 192     | Pop P15 Ø7,0                              |
| 36          | Jo Fly                        | 137 | Pop P04 Ø8,0                     | 193     | Pop P15 Ø12,5                             |
| 39          | Jumbo                         | 140 | Pop P04 Ø12,0                    | 194     | Pop P16 Pull                              |
| 23          | micro - Box                   | 142 | Pop P04 Magic Ø3,0               | 199     | Pop P30 Sun Pull                          |
| 45          | MoMa bi-color Ø40,0 - Ø60,0   | 145 | Pop P04K Magic Ø3,0              | 198     | Pop P30 Sun Static                        |
| 49          | MoMa L/M                      | 146 | Pop P05 Ø6,7 - Ø8,2 brickwork    | 213     | Pop P40 Chandelier                        |
| 43          | MoMa mono-color Ø40,0 - Ø60,0 | 148 | Pop P05 Ø6,7 - Ø8,2 plasterboard | 214     | Pop P50 Pinocchio                         |
| 47          | MoMa W Ø40,0 - Ø60,0          | 156 | Pop P06 mono-color Ø6,0 - Ø12,0  | 215     | Pop P55 Pinocchio                         |
|             |                               | 158 | Pop P06 bi-color Ø6,0            |         |   |
|             |                               | 159 | Pop P06 bi-color Ø12,0           | 75      | Pop Petit                                 |
|             |                               |     |                                  | 186     | Pop Polifemo PF1 - PF2                    |
|             |                               |     |                                  | 168     | Pop PW7                                   |
|             |                               |     |                                  | 110     | Pop PX3 Ø10,0                             |
|             |                               |     |                                  | 112     | Pop PX3 NaNo Ø10,0                        |
|             |                               |     |                                  | 167     | Pop PX7 Ø11,2                             |
|             |                               |     |                                  | 118     | Pop PY3 Ø10,0                             |
|             |                               |     |                                  | 119     | Pop PY3 NaNo Ø10,0                        |
|             |                               |     |                                  | 122     | Pop PY3 Ø10,0 Glass                       |
|             |                               |     |                                  | 123     | Pop PY3 NaNo Ø10,0 Glass                  |
|             |                               |     |                                  | 127     | Pop PZ3 Ø10,0                             |
|             |                               |     |                                  | 226     | Tim T01                                   |
|             |                               |     |                                  | 228     | Tim T02                                   |
|             |                               |     |                                  | 229     | Tim T03                                   |
|             |                               |     |                                  | 227     | Tim T13                                   |
|             |                               |     |                                  | 230     | Tim T22                                   |
|             |                               |     |                                  | 231     | Tim T32                                   |
|             |                               |     |                                  | 233     | Tim T25 - T60 - T120                      |
|             |                               |     |                                  | 235     | Tim T124 - T196                           |
|             |                               |     |                                  | 237     | Wally W01D Dynamic Ø12,5                  |
|             |                               |     |                                  | 238     | Wally Ring WR1D Dynamic Ø13,1             |
|             |                               |     |                                  | 239     | Wally Ring WR1P Pull Ø12,5                |
|             |                               |     |                                  | 240     | Wally W07 Pull Ø12,5                      |
|             |                               |     |                                  | 241     | Wally W16 Pull Ø12,5                      |
|             |                               |     |                                  | 243     | X - Running                               |
|             |                               |     |                                  | 244     | Zip 60-90                                 |
|             |                               |     |                                  | 248-251 | Filo System (diagrams)                    |
|             |                               |     |                                  | 252-259 | Housings index                            |
|             |                               |     |                                  | 267     | Installation instructions Bic housings    |
|             |                               |     |                                  | 268-269 | Installation instructions Easy collection |
|             |                               |     |                                  | 260-266 | Installation instructions Pop housings    |

# Recessed



Bic B02 5x5 p.14



Bic B02 8x8 p.16



Bic B07 7x7 p.18



Bic B12 12x12 p.19



Bic B16 16x16 p.20



Bic B25 - B50 - B60 p.21



Pop P00 Ø3,0 p.78



Pop P00 NaNo Ø3,0 p.79



Easy Pop P00 Ø3,0 p.80



Easy Pop P00 NaNo Ø3,0 p.81



Pop P01 Ø4,0 p.82



Easy Pop P01 Ø4,0 p.83



Pop P01 Ø5,5 p.84



Pop P01 NaNo Ø5,5 p.86



Easy Pop P01 Ø5,5 p.88



Easy Pop P01 NaNo Ø5,5 p.90



Pop P01 Bulb p.92



Easy Pop P01 Bulb p.93



Pop P01 Static Ø12,5 p.94



Pop P01 Dynamic Ø12,5 p.97



Pop P02 Ø5,5 p.98



Easy Pop P02 Ø5,5 p.99



Pop P03 Ø6,0 p.100



Pop P03 NaNo Ø6,0 p.101



Pop P03 Ø 8,0 p. 102



Pop P03 NaNo Ø 8,0 p. 104



Easy Pop P03 Ø 8,0 p. 106



Easy Pop P03 NaNo Ø 8,0 p. 108



Pop PX3 Ø 10,0 p. 110



Pop PX3 NaNo Ø 10,0 p. 112



Easy Pop PX3 Ø 10,0 p. 114



Easy Pop PX3 NaNo Ø 10,0 p. 116



Pop PY3 Ø 10,0 p. 118



Easy Pop PY3 Ø 10,0 p. 120



Pop PY3 Ø 10,0 Glass p. 122



Easy Pop PY3 Ø 10,0 Glass p. 124



Pop PZ3 Ø 10,0 p. 127




Easy Pop PZ3 Ø 10,0 p. 129



Pop P03 Ø 17,0 p. 130



Pop P03 Static Ø 17,0 p. 132



Pop P03 Wall Wash Ø 17,0 p. 133



Pop P03 Look Ø 17,0 p. 135



Pop P04 Ø 8,0 p. 137



Easy Pop P04 Ø 8,0 p. 139



Pop P04 Ø 12,0 p. 140



Pop P04 Magic Ø 12,0 p. 142



Pop P05 p. 146



Pop Ring Static Ø 7,0 p. 150



Pop Ring Static Ø 13,1 p. 151



Pop Ring Dynamic Ø 13,1 p. 152



Pop Ring Dynamic Ø 13,1 p. 153



Pop Ring Pull Ø 12,5 p. 154

# Recessed



Pop P10 p.172



Pop P11 p.173



Pop P12 Ø3,0 p.174



Pop P12 T Ø3,0 p.175



Pop P12L Ø3,0 p.176



Pop P12 Ø7,0 p.178



Pop P12 Ø12,5 p.179



Pop P12 Ring Ø3,0 p.180



Pop P12 Ring Ø6,0 p.182



Pop P12 Ring Ø12,0 p.184



Wally Dynamic Ø12,5 p.237



Wally Ring Dynamic Ø13,1 p.238



Wally Ring Pull Ø12,5 p.239




Zip 60 - 90 p.244



Housings index p.252



Installation housings Pop p.260



Installation housings Bic p.267



Installation Easy products p.268

# Ceiling



MoMa W p.47



Pop P04K p.145



Pop P12K p.117



Pop P07 Ø7,0 - Ø12,0 p.160



Pop P07 bi-color Ø6,0 p.162



Pop P07 bi-color Ø12,0 p.163



Pop P07 Bulb p.164



Pop PX7 Ø11,2 p.167



Pop PW7 p.168



Pop P07D Dynamic Ø12,5 p.170



Pop P07P Pull Ø12,5 p.171



Pop P12 Cup Ø3,0 p.181



Pop P12 Cup Ø6,0 p.183



Pop P12 Cup Ø12,0 p.185



Pop P13 Ø7,0 - Ø12,5 p.188



Pop P30 Sun Static p.198



Pop P30 Sun Pull p.199



Pop Host Ø32,0 - Ø80,0 p.208



Tim T01 p.226



Tim T13 p.227



Tim T02 p.228



Tim T03 p.229



Tim T22 p.230



Tim T32 p.231



Wally W07P Pull p.240



Tim T25 - T60 - T120 p.233

# Wall



Bric p.22



Micro Box 7/1 p.23



Micro Box 7/2 p.23



Box p.24



e-Pad Led p.31



MoMa W p.47



MoMa L/M p.49



Nelly p.50



Nemo p.52



Pop P07 Bulb p.164



Pop P12 Cup Ø3,0 p.181



Pop P12 Cup Ø6,0 p.183




Pop P12 Cup Ø12,0 p.185



Pop P13 Ø7,0 p.188



Pop P13 Ø12,5 p.189



Pop Host W p.208



Pop Host L/M/- T/N p.211



Pop Up1 p.223

## Projectors for track



Pop P14 Ø3,0 p.190



Pop P15 Ø3,0 p.192



Pop P14 Ø7,0 p.190



Pop P15 Ø7,0 p.192



Pop P14 Ø12,5 p.191



Pop P15 Ø12,5 p.193




Pop P16 Pull p.194



Wally W16 Pull p.241



Track 230V 3-CCT p.196



Led Track 48V p.197

## Floor lamps



Pop Polifemo p.186



Pop P55 Pinocchio p.215



Pop Up 207 p.224


## Table lamp




Pop P50 Pinocchio p.214



## Suspension

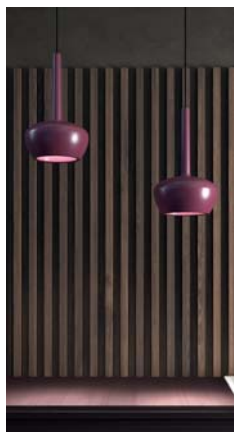

Club C1 mono-color p.26

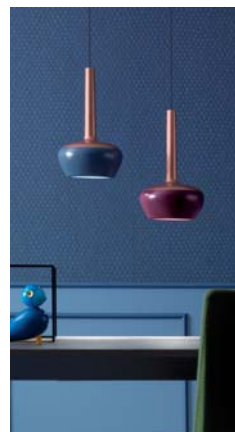

Club C1 bi-color p.27



Club C2 mono-color p.28



Club C3 mono-color p.29



J&B p.32



J&J p.34



Jo Fly p.36



Jumbo p.39



MoMa mono-color p.43



MoMa bi-color p.45

**Filo system:**

- Pop Bijou p.56
- C'est Moi p.60
- C'est Toi p.64
- Chérie p.67
- Chapeau p.70
- BonBon p.73
- Petit p.76

*Filo system: example of installations from pag. 248 to pag. 251*



Pop Bijou p.55



Pop C'est Moi p.59



Pop C'est Toi p.63



Pop Chérie p.66



Pop Chapeau p.69



Pop BonBon p.72



Pop Petit p.75



Pop P06 Ø 6,0- Ø 12,0 p.156



Pop P06 bi-color Ø 6,0 p.158



Pop P06 bi-color Ø 12,0 p.159

## Suspension



Pop Host mono-color Ø 32,0

p.207



Pop Host mono-color Ø80,0

p.202



Pop Host bi-color Ø 32,0

p.205



Pop Host bi-color Ø80,0

p.206



Pop P40 Chandelier

p.213



Pop P120/P200

p.217



Pop Brooklyn

p.219



Tim T124/T196

p.235




X-Running

p.243

## Bic 02 5x5 with trim (for plasterboard and brickwork)



| □    | Frame                  |
|------|------------------------|
| 02 ● | Black                  |
| 06 ○ | White                  |
| C ●  | Copper 15 Working Days |
| S ●  | Brass 15 Working Days  |




### For plasterboard

| IP40                  | MC-E=3     | CE          | ▽ | ⊕ |
|-----------------------|------------|-------------|---|---|
| 500m/A                | LED 6W     | CRI>90      |   |   |
| <b>3B02.2</b> ■ S.□   | P = 2,0cm  |             |   |   |
| <b>4B02.2</b> ■ S.□   | P = 1,5cm  |             |   |   |
| <i>With honeycomb</i> |            |             |   |   |
| Led color             | Nominal lm | Beam spread |   |   |
| 2 = 2700 °K           | 528        | 22°         |   |   |
| 3 = 3000 °K           | 552        |             |   |   |
| 4 = 4000 °K           | 594        |             |   |   |

| IP54                 | MC-E=3     | CE          | ▽ | ⊕ |
|----------------------|------------|-------------|---|---|
| 500m/A               | LED 6W     | CRI>90      |   |   |
| <b>3B02.2</b> ■ S9.□ | P = 2,0cm  |             |   |   |
| Led color            | Nominal lm | Beam spread |   |   |
| 2 = 2700 °K          | 528        | 22°         |   |   |
| 3 = 3000 °K          | 552        |             |   |   |
| 4 = 4000 °K          | 594        |             |   |   |

| © (m-M)                  | Driver                                       |
|--------------------------|--|
| <b>3KIT.500.15</b> (1-1) | on/off                                       |
| <b>3KIT.501.50</b> (1-7) | DALI - Push - 1...10V<br>Remote installation |
| <b>3KIT.502.20</b> (1-3) | DALI<br>Remote installation                  |
| <b>3KIT.503.20</b> (1-3) | Push - 1...10<br>Remote installation         |
| <b>3KIT.504.10</b> (1-1) | IGBT - TRIAC                                 |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.




#### For brickwork

|                       |                  |                   |                    |  |
|-----------------------|------------------|-------------------|--------------------|--|
| <b>IP40</b>           | MC-E=3           |                   |                    |  |
| 500m/A                | LED 6W           | CRI>90            |                    |  |
| <b>3B2M.2</b>         | P = 2,0cm        |                   |                    |  |
| <b>4B2M.2</b>         | P = 1,5cm        |                   |                    |  |
| <i>With honeycomb</i> |                  |                   |                    |  |
|                       | <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |  |
| <b>2</b>              | = 2700 °K        | 528               | 22°                |  |
| <b>3</b>              | = 3000 °K        | 552               |                    |  |
| <b>4</b>              | = 4000 °K        | 594               |                    |  |

|               |                  |                   |                    |  |
|---------------|------------------|-------------------|--------------------|--|
| <b>IP54</b>   | MC-E=3           |                   |                    |  |
| 500m/A        | LED 6W           | CRI>90            |                    |  |
| <b>3B2M.2</b> | P = 2,0cm        |                   |                    |  |
|               | <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |  |
| <b>2</b>      | = 2700 °K        | 528               | 22°                |  |
| <b>3</b>      | = 3000 °K        | 552               |                    |  |
| <b>4</b>      | = 4000 °K        | 594               |                    |  |

© (m-M) Driver

**3KIT.500.15** (1-1) on/off



Housing for brickwork


**1M02.050.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Bic 02 8x8 with trim (for plasterboard and brickwork)



|    | Frame                  |
|----|------------------------|
| 02 | Black                  |
| 06 | White                  |
| C  | Copper 15 Working Days |
| S  | Brass 15 Working Days  |



### For plasterboard

| IP40                  | MC-E=3     | CE          | ∇ | ⊕ |
|-----------------------|------------|-------------|---|---|
| 350m/A                | LED 11W    | CRI>90      |   |   |
| 3B02.3                | P = 2,6cm  |             |   |   |
| 4B02.3                | P = 2,1cm  |             |   |   |
| <i>With honeycomb</i> |            |             |   |   |
| Led color             | Nominal lm | Beam spread |   |   |
| 2 = 2700 °K           | 1195       | S = 22°     |   |   |
| 3 = 3000 °K           | 1257       | T = 15°     |   |   |
| 4 = 4000 °K           | 1313       |             |   |   |

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V


3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery, Driver not included)

3KIT.900.01 (1-1) 1:00 hour

3KIT.900.03 (1-1) 3:00 hours

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



For brickwork

|                       |                  |                   |                    |  |
|-----------------------|------------------|-------------------|--------------------|--|
| <b>IP40</b>           | MC-E=3           |                   |                    |  |
| 350m/A                | LED 11W          | CRI>90            |                    |  |
| <b>3B2M.3</b>         | P = 2,6cm        |                   |                    |  |
| <b>4B2M.3</b>         | P = 2,1cm        |                   |                    |  |
| <i>With honeycomb</i> |                  |                   |                    |  |
|                       | <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |  |
| 2                     | = 2700 °K        | 1195              | S = 22°            |  |
| 3                     | = 3000 °K        | 1257              | T = 15°            |  |
| 4                     | = 4000 °K        | 1313              |                    |  |


© (m-M) Driver

**3KIT.350.1L** (1-1) on/off

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC



Housing for brickwork

**1M02.080.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## Bic 07 7x7 trimless (only for plasterboard)



|                |   |                 |    |   |        |
|----------------|---|-----------------|----|---|--------|
| IP40           | © | DimToWarm       | CE | ▽ | ⊕      |
| 220V ÷ 240V    |   | LED 6W          |    |   | CRI 95 |
| <b>3B07.3W</b> | □ | IGBT - TRIAC    |    |   |        |
|                |   | driver included |    |   |        |

| ■ Led color    | Nominal lm | ▲ Beam spread |
|----------------|------------|---------------|
| W = max 3000°K | max 445 lm | M = 30°       |
| min. 1800°K    | min. 10 lm | S = 18°       |

|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |

| Code      | P1  | P    |
|-----------|-----|------|
| B07.210.□ | 3,6 | 11,5 |
| B07.220.□ | 3,1 | 10,0 |
| B07.3■▲□  | 3,8 | 13,1 |
| B07.3W▲□  | 3,8 | 10,4 |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

|                  |   |      |   |         |
|------------------|---|------|---|---------|
| IP20             | ⊗ | CE   | ▽ | □       |
| 220V ÷ 240V      |   |      |   |         |
| <b>3B07.210.</b> | □ | GU10 |   | max 50W |

|                     |   |       |    |   |                     |
|---------------------|---|-------|----|---|---------------------|
| IP20                | ⊗ | ⊗     | CE | ▽ | ⊕                   |
| 12V                 |   |       |    |   |                     |
| <b>3B07.220.</b>    | □ | GU5.3 |    |   | max 50W             |
| <b>3KIT.201.050</b> |   |       |    |   | max 50VA            |
|                     |   |       |    |   | Dimmable gear: IGBT |

|               |     |         |    |   |        |
|---------------|-----|---------|----|---|--------|
| IP40          | ⊗   | MC-E=3  | CE | ▽ | ⊕      |
| 350m/A        |     | LED 11W |    |   | CRI>90 |
| <b>3B07.3</b> | ■▲□ |         |    |   |        |

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700°K  | 1195       | S = 22°       |
| 3 = 3000°K  | 1257       | T = 12°       |
| 4 = 4000°K  | 1313       |               |



|                          |  |
|--------------------------|--|
| © (m-M)                  | Driver                                       |
| <b>3KIT.350.1L</b> (1-1) | on/off                                       |
| <b>3KIT.351.40</b> (1-3) | DALI - Push - 1...10V<br>Remote installation |
| <b>3KIT.352.15</b> (1-1) | DALI   |
| <b>3KIT.353.15</b> (1-1) | Push - 1...10V                               |
| <b>3KIT.354.18</b> (1-1) | IGBT - TRIAC                                 |

|                          |   |
|--------------------------|---|
|                          | Emergency unit: (inverter + battery, Driver not included) |
| <b>3KIT.900.01</b> (1-1) | 1:00 hour   |
| <b>3KIT.900.03</b> (1-1) | 3:00 hours  |

### Housing for plasterboard

|       |                    |  |
|-------|--------------------|--|
| ■     | <b>1Z07.070.01</b> | Single   |
| ■ ■   | <b>1Z07.070.2L</b> | Double   |
| ■ ■ ■ | <b>1Z07.070.3L</b> | Triple <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">ROS</span> |

# Bic 12 12x12 trimless (only for plasterboard)

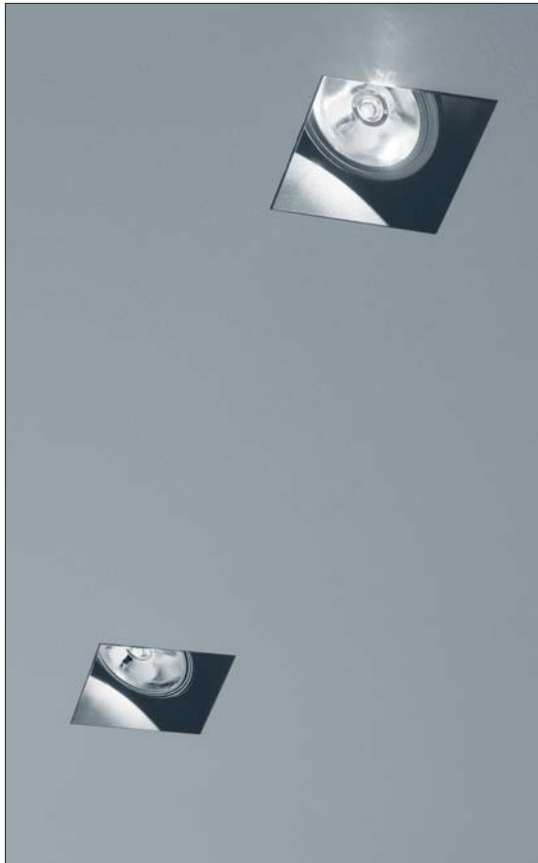

| Frame | Color |
|-------|-------|
| 02    | Black |
| 06    | White |

IP20

12V  
**3B12.530.** **653** max 50W  
**3KIT.201.050** max 50VA  
 Dimmable gear: IGBT

IP20 MC-E=3

350 - 500 m/A **LED** CRI>90  
**3B12.5**

(m-M) **LED 12,5W** **350m/A**

**3KIT.350.1L** (1-1) on/off  
**3KIT.351.40** (1-3) DALI - Push - 1...10V  
**3KIT.352.15** (1-1) DALI  
**3KIT.353.15** (1-1) Push - 1...10V  
**3KIT.354.18** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1477       | L = 60°     |
| 3 = 3000 °K | 1565       | S = 24°     |
| 4 = 4000 °K | 1635       | T = 12°     |


(m-M) **LED 18,4W** **500m/A**

**3KIT.500.1L** (1-1) on/off  
**3KIT.501.50** (1-3) DALI - Push - 1...10V  
**3KIT.502.20** (1-1) DALI  
**3KIT.503.20** (1-1) Push - 1...10V  
**3KIT.504.20** (1-1) IGBT - Triac

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2020       | L = 60°     |
| 3 = 3000 °K | 2140       | S = 24°     |
| 4 = 4000 °K | 2236       | T = 12°     |

Emergency unit: (inverter + battery, Driver not included)

**3KIT.900.01** (1-1) 1:00 hour  
**3KIT.900.03** (1-1) 3:00 hours




Housing for plasterboard

**1Z12.120.01** Single

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.



# Bic 16 16x16 trimless (only for plasterboard) ROS

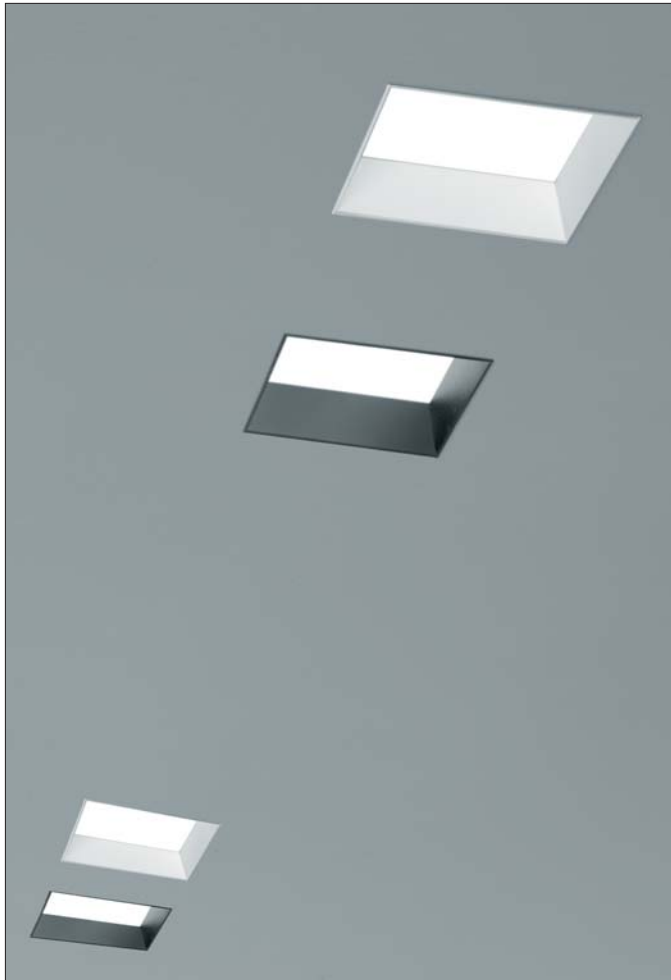

□ Frame

02 ● Black

06 ○ White



IP20 MC-E=3

700m/A LED 26,2W CRI>90

**3B16.6** ■ L. □

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 3374       | 104°        |
| 3 = 3000 °K | 3533       |             |
| 4 = 4000 °K | 3649       |             |

© (m-M) Driver

**3KIT.700.1L** (1-1) on/off

**3KIT.701.50** (1-1) DALI - Push - 1...10V

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour

**3KIT.900.03** (1-1) 3:00 hours

Housing for plasterboard

■ **1ZOB.016.01** Single

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


**Bic trimless** (only for plasterboard) 







Frame

02  Black





06  White







**Bic 25**

|  |                |   |
|--|----------------|---|
| IP44  | MC-E=3         |   |
| 220V ÷ 240V  | <b>LED 17W</b> | CRI>90  |
| <b>3BC2.6</b> <input checked="" type="checkbox"/> L. <input type="checkbox"/>            | on/off         |   |
| <input checked="" type="checkbox"/> Led color  | Nominal lm     |  Beam spread   |
| <b>3</b> = 3000 °K   | 2030           | 104°  |
| <b>1Z0B.025.01</b>   | Single         |   |
| Housing for plasterboard   |                |   |

**Bic 50**

|  |                  |   |
|--|------------------|---|
| IP44  | MC-E=3           |   |
| 220V ÷ 240V  | <b>LED 25,6W</b> | CRI>90  |
| <b>3BC5.6</b> <input checked="" type="checkbox"/> L. <input type="checkbox"/>            | on/off           |   |
| <b>3BC5.9</b> <input checked="" type="checkbox"/> L. <input type="checkbox"/>            | with Emergency   |   |
| <input checked="" type="checkbox"/> Led color  | Nominal lm       |  Beam spread   |
| <b>3</b> = 3000 °K   | 3090             | 104°  |
| <b>1Z0B.050.01</b>   | Single           |   |
| Housing for plasterboard   |                  |   |

**Bic 60**


|  |                  |   |
|--|------------------|---|
| IP44  | MC-E=3           |   |
| 220V ÷ 240V  | <b>LED 34,2W</b> | CRI>90  |
| <b>3BC6.6</b> <input checked="" type="checkbox"/> L. <input type="checkbox"/>            | on/off           |   |
| <b>3BC6.9</b> <input checked="" type="checkbox"/> L. <input type="checkbox"/>            | with Emergency   |   |
| <input checked="" type="checkbox"/> Led color  | Nominal lm       |  Beam spread   |
| <b>3</b> = 3000 °K   | 4120             | 104°  |
| <b>1Z0B.060.01</b>   | Single           |   |
| Housing for plasterboard   |                  |   |

| Code                              | L1   | L2  | H    |
|-----------------------------------|------|-----|------|
| BC2.63L. <input type="checkbox"/> | 25,1 | 9,6 | 14,6 |
| BC5.63L. <input type="checkbox"/> | 50,1 | 9,6 | 14,6 |
| BC5.93L. <input type="checkbox"/> | 50,1 | 9,6 | 15,9 |
| BC6.63L. <input type="checkbox"/> | 60,1 | 9,6 | 14,6 |
| BC6.93L. <input type="checkbox"/> | 60,1 | 9,6 | 15,9 |

# Bric




|                          |                          |
|--------------------------|--------------------------|
| <input type="checkbox"/> | Frame                    |
| 02                       | ● Black                  |
| 06                       | ○ White                  |
| C                        | ● Copper 25 Working Days |
| S                        | ● Brass 25 Working Days  |



## Bric 20

|             |        |                   |             |   |
|-------------|--------|-------------------|-------------|---|
| IP20        | ©      | MC-E=3            | CE          | ▽ |
| 220-240V    |        | 8,5W              | CRI>90      |   |
| 3BR2.4      | ■ L.02 | dim. IGBT - TRIAC |             |   |
| 3BR2.4      | ■ L.06 | dim. IGBT - TRIAC |             |   |
| 3BR2.4      | ■ L.C  | dim. IGBT - TRIAC |             |   |
| 3BR2.4      | ■ L.S  | dim. IGBT - TRIAC |             |   |
| 3BR2F4      | ■ L.02 | DALI - Push       |             |   |
| 3BR2F4      | ■ L.06 | DALI - Push       |             |   |
| 3BR2F4      | ■ L.C  | DALI - Push       |             |   |
| 3BR2F4      | ■ L.S  | DALI - Push       |             |   |
| ■ Led color |        | Nominal lm        | Beam spread |   |
| 2 = 2700 °K |        | 1040              | 92°         |   |
| 3 = 3000 °K |        | 1095              |             |   |



## Bric 34

|             |        |            |             |   |
|-------------|--------|------------|-------------|---|
| IP20        | ©      | MC-E=3     | CE          | ▽ |
| 220-240V    |        | 17W        | CRI>90      |   |
| 3BR3.4      | ■ L.02 | on/off     |             |   |
| 3BR3.4      | ■ L.06 | on/off     |             |   |
| 3BR3.4      | ■ L.C  | on/off     |             |   |
| 3BR3.4      | ■ L.S  | on/off     |             |   |
| ■ Led color |        | Nominal lm | Beam spread |   |
| 2 = 2700 °K |        | 2080       | 92°         |   |
| 3 = 3000 °K |        | 2190       |             |   |



## Bric 62

|             |        |            |             |   |
|-------------|--------|------------|-------------|---|
| IP20        | ©      | MC-E=3     | CE          | ▽ |
| 220-240V    |        | 34W        | CRI>90      |   |
| 3BR6.4      | ■ L.02 | on/off     |             |   |
| 3BR6.4      | ■ L.06 | on/off     |             |   |
| 3BR6.4      | ■ L.C  | on/off     |             |   |
| 3BR6.4      | ■ L.S  | on/off     |             |   |
| ■ Led color |        | Nominal lm | Beam spread |   |
| 2 = 2700 °K |        | 4165       | 92°         |   |
| 3 = 3000 °K |        | 4385       |             |   |

## micro Box



- Frame
- 
- 02  Black
  - 04  Brushed steel
  - 06  White
  - 08  Corten painted ROS
  - 09  Polished steel ROS




### micro Box 7.1

|             |      |       |
|-------------|------|-------|
| IP20        | CE   | ▽     |
| 220-240V    | GU10 | 1x50W |
| 3B71.210.02 |      |       |
| 3B71.210.04 |      |       |
| 3B71.210.06 |      |       |
| 3B71.210.08 |      |       |
| 3B71.210.09 |      |       |

### micro Box 7.1

|             |        |            |     |        |
|-------------|--------|------------|-----|--------|
| IP20        | ©      | LED 1x8,7W | CE  | ▽      |
| 220-240V    | 3000°K | 660 lm     | 70° | CRI>90 |
| 3B71.33S.02 |        | dim. IGBT  |     |        |
| 3B71.33S.04 |        | dim. IGBT  |     |        |
| 3B71.33S.06 |        | dim. IGBT  |     |        |
| 3B71.33S.08 |        | dim. IGBT  |     |        |
| 3B71.33S.09 |        | dim. IGBT  |     |        |




### micro Box 7.2

|             |      |       |
|-------------|------|-------|
| IP20        | CE   | ▽     |
| 220-240V    | GU10 | 2x50W |
| 3B72.210.02 |      |       |
| 3B72.210.04 |      |       |
| 3B72.210.06 |      |       |
| 3B72.210.08 |      |       |
| 3B72.210.09 |      |       |

### micro Box 7.2

|             |        |            |     |        |
|-------------|--------|------------|-----|--------|
| IP20        | ©      | LED 2x8,7W | CE  | ▽      |
| 220-240V    | 3000°K | 2x660 lm   | 70° | CRI>90 |
| 3B72.33S.02 |        | dim. IGBT  |     |        |
| 3B72.33S.04 |        | dim. IGBT  |     |        |
| 3B72.33S.06 |        | dim. IGBT  |     |        |
| 3B72.33S.08 |        | dim. IGBT  |     |        |
| 3B72.33S.09 |        | dim. IGBT  |     |        |

# Box

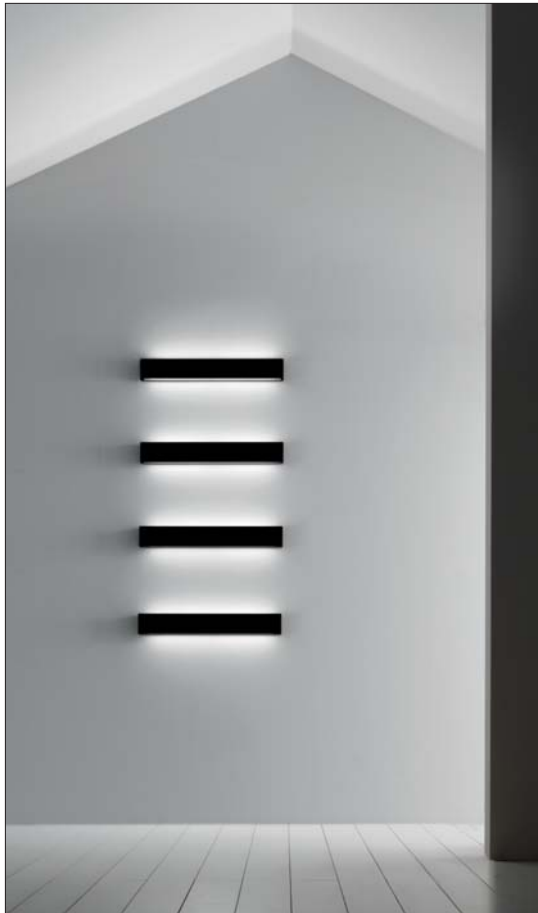

Frame

- 02  Black
- 04  Brushed steel
- 06  White
- 09  Polished steel



| Code   | L     | H   | P   |
|--------|-------|-----|-----|
| BOX23  | 23,0  | 8,5 | 7,2 |
| BOX31  | 31,0  | 8,5 | 7,2 |
| BOX50  | 50,0  | 8,5 | 7,2 |
| BOX63  | 63,0  | 8,5 | 7,2 |
| BOX120 | 120,0 | 8,5 | 7,2 |

## Box 23 cm

| IP20               |            | CE    |  |
|--------------------|------------|-------|--|
| 220-240V           | R7S 74,9mm | 1x80W |  |
| <b>3B23.510.02</b> |            |       |  |
| <b>3B23.510.04</b> |            |       |  |
| <b>3B23.510.06</b> |            |       |  |
| <b>3B23.510.09</b> |            |       |  |

| IP40               |              | CE                 |  |
|--------------------|--------------|--------------------|--|
| 220-240V           | G24Q-2 1x18W | Electronic ballast |  |
| <b>3B23.100.02</b> |              |                    |  |
| <b>3B23.100.04</b> |              |                    |  |
| <b>3B23.100.06</b> |              |                    |  |
| <b>3B23.100.09</b> |              |                    |  |

| IP40               |            | MC-E=3 | CE |  |
|--------------------|------------|--------|----|--|
| 220-240V           | LED 2x6,8W | CRI>90 |    |  |
| <b>3B23.5 L.02</b> | on/off     |        |    |  |
| <b>3B23.5 L.04</b> | on/off     |        |    |  |
| <b>3B23.5 L.06</b> | on/off     |        |    |  |
| <b>3B23.5 L.09</b> | on/off     |        |    |  |

Led color    Nominal lm    Beam spread  
**3 = 3000 °K**    2x826    90°

## Box 31 cm

| IP20               |            | CE     |  |
|--------------------|------------|--------|--|
| 220-240V           | R7S 74,9mm | 1x120W |  |
| <b>3B31.510.02</b> |            |        |  |
| <b>3B31.510.04</b> |            |        |  |
| <b>3B31.510.06</b> |            |        |  |
| <b>3B31.510.09</b> |            |        |  |

| IP40               |              | CE                 |  |
|--------------------|--------------|--------------------|--|
| 220-240V           | G24Q-3 1x26W | Electronic ballast |  |
| <b>3B31.100.02</b> |              |                    |  |
| <b>3B31.100.04</b> |              |                    |  |
| <b>3B31.100.06</b> |              |                    |  |
| <b>3B31.100.09</b> |              |                    |  |

| IP40               |            | MC-E=3 | CE |  |
|--------------------|------------|--------|----|--|
| 220-240V           | LED 2x9,0W | CRI>90 |    |  |
| <b>3B31.5 L.02</b> | on/off     |        |    |  |
| <b>3B31.5 L.04</b> | on/off     |        |    |  |
| <b>3B31.5 L.06</b> | on/off     |        |    |  |
| <b>3B31.5 L.09</b> | on/off     |        |    |  |

| IP40               |             | MC-E=3 | CE |  |
|--------------------|-------------|--------|----|--|
| 220-240V           | LED 2x9,0W  | CRI>90 |    |  |
| <b>3B31F5 L.02</b> | DALI - Push |        |    |  |
| <b>3B31F5 L.04</b> | DALI - Push |        |    |  |
| <b>3B31F5 L.06</b> | DALI - Push |        |    |  |
| <b>3B31F5 L.09</b> | DALI - Push |        |    |  |

| IP40               |                | MC-E=3 | CE |  |
|--------------------|----------------|--------|----|--|
| 220-240V           | LED 2x9,0W     | CRI>90 |    |  |
| <b>3B31G5 L.02</b> | 1...10V - Push |        |    |  |
| <b>3B31G5 L.04</b> | 1...10V - Push |        |    |  |
| <b>3B31G5 L.06</b> | 1...10V - Push |        |    |  |
| <b>3B31G5 L.09</b> | 1...10V - Push |        |    |  |

Led color    Nominal lm    Beam spread  
**3 = 3000 °K**    2x1102    90°

### Box 50 cm

|                    |       |                   |       |
|--------------------|-------|-------------------|-------|
| IP20               |       |                   | CE    |
| 220-240V           |       | <b>R7S 74,9mm</b> | 2x80W |
| <b>3B50.510.02</b> | ..... |                   |       |
| <b>3B50.510.04</b> | ..... |                   |       |
| <b>3B50.510.06</b> | ..... |                   |       |
| <b>3B50.510.09</b> | ..... |                   |       |

|                    |       |                   |                    |
|--------------------|-------|-------------------|--------------------|
| IP40               |       |                   | CE                 |
| 220-240V           |       | <b>2G11 1x36W</b> | Electronic ballast |
| <b>3B50.100.02</b> | ..... |                   |                    |
| <b>3B50.100.04</b> | ..... |                   |                    |
| <b>3B50.100.06</b> | ..... |                   |                    |
| <b>3B50.100.09</b> | ..... |                   |                    |

|                    |        |                    |        |
|--------------------|--------|--------------------|--------|
| IP40               |        | MC-E=3             | CE     |
| 220-240V           |        | <b>LED 2x13,5W</b> | CRI>90 |
| <b>3B50.5 L.02</b> | on/off |                    |        |
| <b>3B50.5 L.04</b> | on/off |                    |        |
| <b>3B50.5 L.06</b> | on/off |                    |        |
| <b>3B50.5 L.09</b> | on/off |                    |        |

|                    |                       |                    |        |
|--------------------|-----------------------|--------------------|--------|
| IP40               |                       | MC-E=3             | CE     |
| 220-240V           |                       | <b>LED 2x13,5W</b> | CRI>90 |
| <b>3B50E5 L.02</b> | DALI - Push - 1...10V |                    |        |
| <b>3B50E5 L.04</b> | DALI - Push - 1...10V |                    |        |
| <b>3B50E5 L.06</b> | DALI - Push - 1...10V |                    |        |
| <b>3B50E5 L.09</b> | DALI - Push - 1...10V |                    |        |

|                    |                |                    |        |
|--------------------|----------------|--------------------|--------|
| IP40               |                | MC-E=3             | CE     |
| 220-240V           |                | <b>LED 2x13,5W</b> | CRI>90 |
| <b>3B50.9 L.02</b> | with Emergency |                    |        |
| <b>3B50.9 L.04</b> | with Emergency |                    |        |
| <b>3B50.9 L.06</b> | with Emergency |                    |        |
| <b>3B50.9 L.09</b> | with Emergency |                    |        |

Led color  
**3 = 3000 °K**

Nominal lm  
**2x1653**

Beam spread  
**90°**

### Box 63 cm

|                    |       |                   |       |
|--------------------|-------|-------------------|-------|
| IP20               |       |                   | CE    |
| 220-240V           |       | <b>R7S 74,9mm</b> | 3x80W |
| <b>3B63.510.02</b> | ..... |                   |       |
| <b>3B63.510.04</b> | ..... |                   |       |
| <b>3B63.510.06</b> | ..... |                   |       |
| <b>3B63.510.09</b> | ..... |                   |       |

|                    |       |                   |                    |
|--------------------|-------|-------------------|--------------------|
| IP40               |       |                   | CE                 |
| 220-240V           |       | <b>2G11 1x55W</b> | Electronic ballast |
| <b>3B63.100.02</b> | ..... |                   |                    |
| <b>3B63.100.04</b> | ..... |                   |                    |
| <b>3B63.100.06</b> | ..... |                   |                    |
| <b>3B63.100.09</b> | ..... |                   |                    |

|                    |        |                    |        |
|--------------------|--------|--------------------|--------|
| IP40               |        | MC-E=3             | CE     |
| 220-240V           |        | <b>LED 2x18,2W</b> | CRI>90 |
| <b>3B63.5 L.02</b> | on/off |                    |        |
| <b>3B63.5 L.04</b> | on/off |                    |        |
| <b>3B63.5 L.06</b> | on/off |                    |        |
| <b>3B63.5 L.09</b> | on/off |                    |        |

|                    |                       |                    |        |
|--------------------|-----------------------|--------------------|--------|
| IP40               |                       | MC-E=3             | CE     |
| 220-240V           |                       | <b>LED 2x18,2W</b> | CRI>90 |
| <b>3B63E5 L.02</b> | DALI - Push - 1...10V |                    |        |
| <b>3B63E5 L.04</b> | DALI - Push - 1...10V |                    |        |
| <b>3B63E5 L.06</b> | DALI - Push - 1...10V |                    |        |
| <b>3B63E5 L.09</b> | DALI - Push - 1...10V |                    |        |

|                    |                |                    |        |
|--------------------|----------------|--------------------|--------|
| IP40               |                | MC-E=3             | CE     |
| 220-240V           |                | <b>LED 2x18,2W</b> | CRI>90 |
| <b>3B63.9 L.02</b> | with Emergency |                    |        |
| <b>3B63.9 L.04</b> | with Emergency |                    |        |
| <b>3B63.9 L.06</b> | with Emergency |                    |        |
| <b>3B63.9 L.09</b> | with Emergency |                    |        |

Led color  
**3 = 3000 °K**

Nominal lm  
**2x2205**

Beam spread  
**90°**

### Box 120 cm

|                     |       |                 |                    |
|---------------------|-------|-----------------|--------------------|
| IP20                |       |                 | CE                 |
| 220-240V            |       | <b>G5 2x54W</b> | Electronic ballast |
| <b>3B120.100.02</b> | ..... |                 |                    |
| <b>3B120.100.04</b> | ..... |                 |                    |
| <b>3B120.100.06</b> | ..... |                 |                    |
| <b>3B120.100.09</b> | ..... |                 |                    |

|                     |        |                    |        |
|---------------------|--------|--------------------|--------|
| IP40                |        | MC-E=3             | CE     |
| 220-240V            |        | <b>LED 2x63,6W</b> | CRI>90 |
| <b>3B120.4 L.02</b> | on/off |                    |        |
| <b>3B120.4 L.04</b> | on/off |                    |        |
| <b>3B120.4 L.06</b> | on/off |                    |        |
| <b>3B120.4 L.09</b> | on/off |                    |        |


Led color  
**3 = 3000 °K**

Nominal lm  
**2x4740**

Beam spread  
**90°**



# Club C1 mono-color



IP20 ©

220-240V

3C1C.2

L.   
 Led color  
 2 = 2700°K

9W

on/off

Nominal lm  
 1155

CE ▽


CRI>90

Beam spread  
 60°

|    | Frame | Canopy |
|----|-------|--------|
| 02 | Black | Black  |
| 06 | White | Black  |
| B  | Blue  | Black  |
| G  | Green | Black  |
| P  | Rose  | Black  |
| R  | Red   | Black  |

Time delivery: 25 Working Days  
 Black coaxial power supply cable

Club C1 bi-color ROS




|                                    |   |             |   |
|------------------------------------|---|-------------|---|
| IP20                               | ©   | CE          | ▽ |
| 220-240V                           | 9W  | CRI>90      |   |
| <b>3C1C.2</b>                      | <input type="checkbox"/> L <input type="checkbox"/> | on/off      |   |
| <input type="checkbox"/> Led color | Nominal lm  | Beam spread |   |
| 2 = 2700°K                         | 1155  | 60°         |   |

| <input type="checkbox"/> | Up | Down | Diffuser color | Canopy |
|--------------------------|----|------|----------------|--------|
| CB                       |    |      | Copper/Blue    | Black  |
| CG                       |    |      | Copper/Green   | Black  |
| CP                       |    |      | Copper/Rose    | Black  |
| CR                       |    |      | Copper/Red     | Black  |

Time delivery: 25 Working Days  
Black coaxial power supply cable

## Club C2 mono-color



IP20 ©

CE ▽

220-240V

9W

CRI>90

3C2C.2 ■ L. □

on/off

■ Led color

Nominal lm

Beam spread

2 = 2700°K


1155

60°

| □  | Frame   | Canopy |
|----|---------|--------|
| 02 | ● Black | Black  |
| 06 | ○ White | Black  |
| B  | ● Blue  | Black  |
| G  | ● Green | Black  |
| P  | ● Rose  | Black  |
| R  | ● Red   | Black  |

Time delivery: 25 Working Days  
Black coaxial power supply cable

## Club C3 mono-color



IP20 ©

220-240V

**3C3C.2** ■ L. □

■ Led color  
2 = 2700°K

9W

on/off

Nominal lm  
1155

CE ▼

CRI>90


Beam spread  
60°

| □  | Frame   | Canopy |
|----|---------|--------|
| 02 | ● Black | Black  |
| 06 | ○ White | Black  |
| B  | ● Blue  | Black  |
| G  | ● Green | Black  |
| P  | ● Rose  | Black  |
| R  | ● Red   | Black  |

*Time delivery: 25 Working Days  
Black coaxial power supply cable*


*e-PAD*





### e - PAD 15

|             |                   |             |
|-------------|-------------------|-------------|
| IP20        | MC-E=3            | CE          |
| 220-240V    | LED 1x18W         | CRI>90      |
| 3E15.5 L. □ | dim. IGBT - TRIAC |             |
| ■ Led color | Nominal lm        | Beam spread |
| 2 = 2700 °K | 2494              | 105°        |
| 3 = 3000 °K | 2611              |             |
| 4 = 4000 °K | 2697              |             |




### e - PAD 30

|             |                       |             |
|-------------|-----------------------|-------------|
| IP20        | MC-E=3                | CE          |
| 220-240V    | LED 2x18W             | CRI>90      |
| 3E30.5 L. □ | dim. IGBT - TRIAC     |             |
| 3E30.7 L. □ | DALI - Push - 1...10V |             |
| ■ Led color | Nominal lm            | Beam spread |
| 2 = 2700 °K | 2x2494                | 105°        |
| 3 = 3000 °K | 2x2611                |             |
| 4 = 4000 °K | 2x2697                |             |

|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |


J & B



|                  |                   |             |
|------------------|-------------------|-------------|
| IP20             | CE                |             |
| 220-240V         | e27 4W CRI>80     |             |
| <b>3JB1.12L.</b> | dim. IGBT - Triac |             |
| Led color        | Nominal lm        | Beam spread |
| 2700 °K          | 470               | 360°        |

| Canopy/Wire | Cylinder         | Diffuser |
|-------------|------------------|----------|
| 02 ● Black  | ● Black          | ● Black  |
| KSK ● Black | ● Brass Anodized | ● Black  |
| 06 ○ White  | ○ White          | ○ White  |
| WSW ○ White | ● Brass Anodized | ○ White  |

Available from 15/10/2019

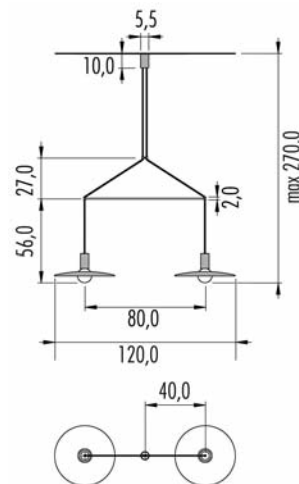

|                  |                   |             |
|------------------|-------------------|-------------|
| IP20             | CE                |             |
| 220-240V         | e27 2x4W CRI>80   |             |
| <b>3JB2.12L.</b> | dim. IGBT - Triac |             |
| Led color        | Nominal lm        | Beam spread |
| 2700 °K          | 2x470             | 360°        |

| Canopy/Wire | Spacer  | Cylinder         | Diffuser |
|-------------|---------|------------------|----------|
| 02 ● Black  | ● Brass | ● Black          | ● Black  |
| KSK ● Black | ● Brass | ● Brass Anodized | ● Black  |
| 06 ○ White  | ● Brass | ○ White          | ○ White  |
| WSW ○ White | ● Brass | ● Brass Anodized | ○ White  |

Available from 15/10/2019






J & J




|                  |                   |             |
|------------------|-------------------|-------------|
| IP20             |                   | CE          |
| 220-240V         | e27 4W            | CRI>80      |
| <b>3JJ1.12L.</b> | dim. IGBT - Triac |             |
| Led color        | Nominal lm        | Beam spread |
| 2700 °K          | 470               | 360°        |

|                          |             |                  |             |
|--------------------------|-------------|------------------|-------------|
| <input type="checkbox"/> | Canopy/Wire | Cylinder         | Glass       |
| KSF                      | ● Black     | ● Brass Anodized | ● Fumé      |
| WSH                      | ○ White     | ● Brass Anodized | ● Champagne |

Available from 15/10/2019

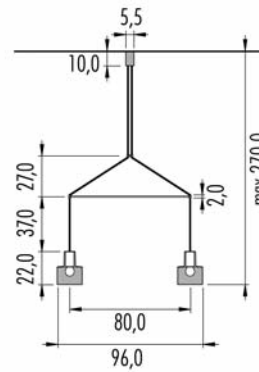

|                  |                   |             |
|------------------|-------------------|-------------|
| IP20             |                   | CE          |
| 220-240V         | e27 2x4W          | CRI>80      |
| <b>3JJ2.12L.</b> | dim. IGBT - Triac |             |
| Led color        | Nominal lm        | Beam spread |
| 2700 °K          | 2x470             | 360°        |




|                          |             |         |                  |             |
|--------------------------|-------------|---------|------------------|-------------|
| <input type="checkbox"/> | Canopy/Wire | Spacer  | Cylinder         | Diffuser    |
| KSF                      | ● Black     | ● Brass | ● Brass Anodized | ● Fumé      |
| WSH                      | ○ White     | ● Brass | ● Brass Anodized | ● Champagne |

Available from 15/10/2019



# Jo Fly



|                    |                   |                    |   |
|--------------------|-------------------|--------------------|---|
| IP20               | Ⓛ                 | CE                 | ▽ |
| 220-240V           | e27 6W            | CRI>90             |   |
| <b>3JF1.12L.02</b> | dim. IGBT - Triac |                    |   |
| <b>3JF1.12L.06</b> | dim. IGBT - Triac |                    |   |
| <i>Led color</i>   | <i>Nominal lm</i> | <i>Beam spread</i> |   |
| 2700°K             | 540               | 360°               |   |


|    | Canopy/Wire | Diffuser | Bulb              |
|----|-------------|----------|-------------------|
| 02 | ● Black     | ● Black  | ○ White porcelain |
| 06 | ○ White     | ○ White  | ○ White porcelain |

Available from 15/10/2019



*Jumbo J07*



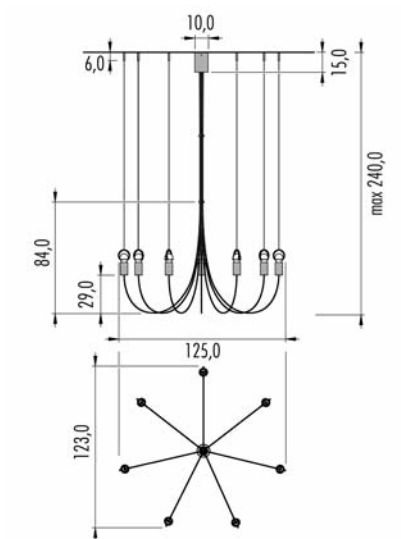

IP20

CE

220-240V

e27 7x4W

CRI>80

**3J07.12L.**

dimm. IGBT - Triac

*Led color*  
2700 °K

*Nominal lm*  
7x470



*Beam spread*  
360°

|                               |                          |
|-------------------------------|--------------------------|
| <input type="checkbox"/> Wire | <i>Cylinder for Bulb</i> |
| <b>02</b> Black               | Black                    |
| <b>KS1</b> Black              | Brass Anodized           |

*Time delivery: 25 Working days*  
*Available from 15/10/2019*

*Jumbo J14*



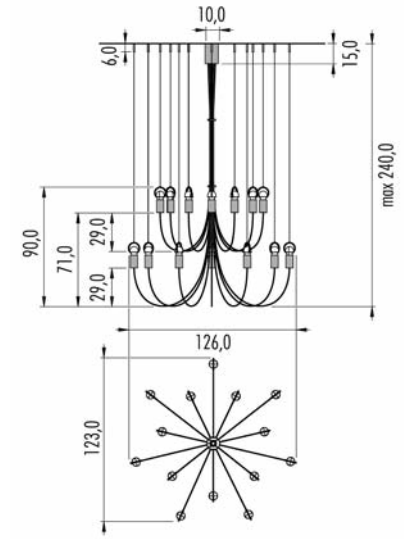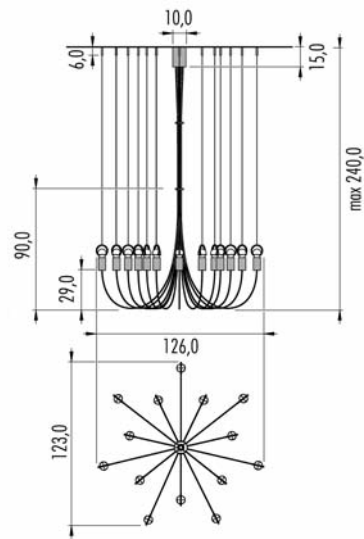

|                  |                   |                    |   |
|------------------|-------------------|--------------------|---|
| IP20             | Ⓛ                 | CE                 | ▽ |
| 220-240V         | e27 14x4W         | CRI>80             |   |
| <b>3J14.12L</b>  | □                 | dimm. IGBT - Triac |   |
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |   |
| 2700 °K          | 14x470            | 360°               |   |


|     |         |                   |
|-----|---------|-------------------|
| □   | Wire    | Cylinder for Bulb |
| 02  | ● Black | ● Black           |
| KS1 | ● Black | ● Brass Anodized  |

*Time delivery: 25 Working days*  
*Available from 15/10/2019*




*MoMa* mono-color *New*



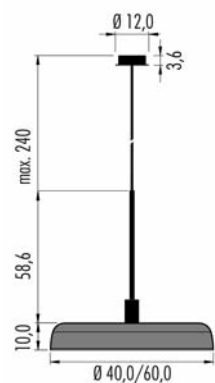


|                       |                   |                    |        |
|-----------------------|-------------------|--------------------|--------|
| IP20                  | Ⓛ                 | CE                 | ▽      |
| 220-240V              | e27               | 7W                 | CRI>80 |
| dimmable IGBT - Triac |                   |                    |        |
| <b>3M40C.12L.06</b>   |                   | Ø 40cm             |        |
| <b>3M60C.12L.06</b>   |                   | Ø 60cm             |        |
| <i>Led color</i>      | <i>Nominal lm</i> | <i>Beam spread</i> |        |
| 2700°K                | 806               | 163°               |        |

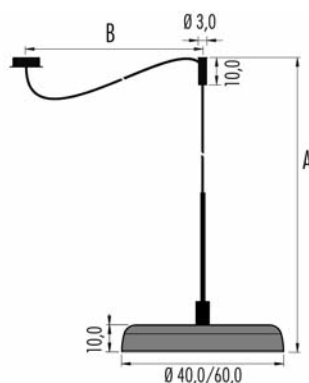

|                       |                   |                    |        |   |
|-----------------------|-------------------|--------------------|--------|---|
| IP20                  | Ⓛ                 | A+B=410cm          | CE     | ▽ |
| 220-240V              | e27               | 7W                 | CRI>80 |   |
| dimmable IGBT - Triac |                   |                    |        |   |
| <b>3M40D.12L.06</b>   |                   | Ø 40cm             |        |   |
| <b>3M60D.12L.06</b>   |                   | Ø 60cm             |        |   |
| <i>Led color</i>      | <i>Nominal lm</i> | <i>Beam spread</i> |        |   |
| 2700°K                | 806               | 163°               |        |   |


|           | Frame   | Bulb            | CUP canopy | cable |
|-----------|---------|-----------------|------------|-------|
| <b>06</b> | ○ White | ● Mirror Chrome | White      | White |

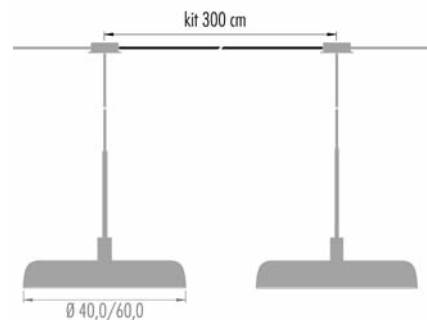


|                                       |       |
|---------------------------------------|-------|
| <i>Kit Cable for MoMa composition</i> |       |
| <b>1KIT.300.06</b>                    | White |

*MoMa bi-color*




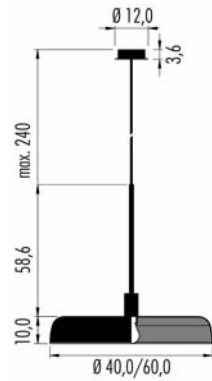

|                   |                          |                    |                        |
|-------------------|--------------------------|--------------------|------------------------|
| IP20              | Ⓛ                        | CE                 | ▽                      |
| 220-240V          | e27                      | 4W CRI>80          | dimmmable IGBT - Triac |
| <b>3M40C.12L.</b> | <input type="checkbox"/> | Ø 40cm             |                        |
| <b>3M60C.12L.</b> | <input type="checkbox"/> | Ø 60cm             |                        |
| <i>Led color</i>  | <i>Nominal lm</i>        | <i>Beam spread</i> |                        |
| 2700 °K           | 470                      | 163°               |                        |

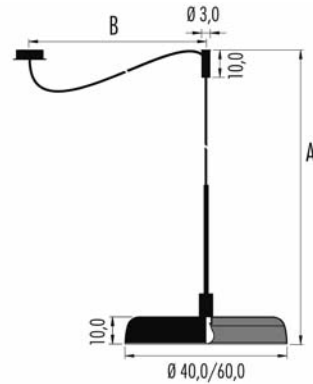

|                   |                          |                    |                        |   |
|-------------------|--------------------------|--------------------|------------------------|---|
| IP20              | Ⓛ                        | A+B=410cm          | CE                     | ▽ |
| 220-240V          | e27                      | 4W CRI>80          | dimmmable IGBT - Triac |   |
| <b>3M40D.12L.</b> | <input type="checkbox"/> | Ø 40cm             |                        |   |
| <b>3M60D.12L.</b> | <input type="checkbox"/> | Ø 60cm             |                        |   |
| <i>Led color</i>  | <i>Nominal lm</i>        | <i>Beam spread</i> |                        |   |
| 2700 °K           | 470                      | 163°               |                        |   |

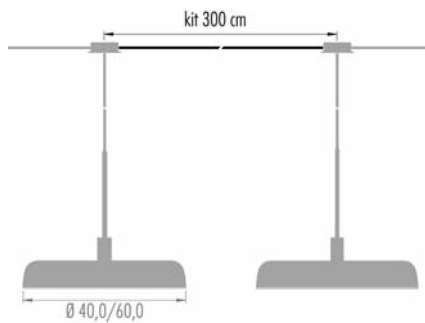


|                                       |                 |
|---------------------------------------|-----------------|
| <i>Kit Cable for MoMa composition</i> |                 |
| <b>1KIT.300.C</b>                     | Copper L. 300cm |

| <input type="checkbox"/> | <i>Out</i> | <i>In</i> | <i>CUP</i>   | <i>cable</i> | <i>Bulb</i>   |
|--------------------------|------------|-----------|--------------|--------------|---------------|
| KC                       | ●          | ●         | Black/Copper | Black Copper | ● Transparent |
| WC                       | ●          | ●         | White/Copper | White Copper | ● Transparent |
| BC                       | ●          | ●         | Blue/Copper  | Blue Copper  | ● Transparent |
| GC                       | ●          | ●         | Green/Copper | Green Copper | ● Transparent |
| PC                       | ●          | ●         | Rose/Copper  | Rose Copper  | ● Transparent |
| RC                       | ●          | ●         | Red/Copper   | Red Copper   | ● Transparent |

*Time delivery: 25 Working Days*

*MoMa W bi-color wall/ceiling*





|                       |                          |                    |        |
|-----------------------|--------------------------|--------------------|--------|
| IP20                  | Ⓛ                        | CE                 | ▽      |
| 220-240V              | e27                      | 4W                 | CRI>80 |
| dimmable IGBT - Triac |                          |                    |        |
| <b>3M40W.12L.</b>     | <input type="checkbox"/> | Ø 40cm             |        |
| <b>3M60W.12L.</b>     | <input type="checkbox"/> | Ø 60cm             |        |
| <i>Led color</i>      | <i>Nominal lm</i>        | <i>Beam spread</i> |        |
| 2700°K                | 470                      | 163°               |        |




|    | Out | In |              | Bulb |             |
|----|-----|----|--------------|------|-------------|
| KC | ●   | ●  | Black/Copper | ●    | Transparent |
| WC | ●   | ●  | White/Copper | ●    | Transparent |
| BC | ●   | ●  | Blue/Copper  | ●    | Transparent |
| GC | ●   | ●  | Green/Copper | ●    | Transparent |
| PC | ●   | ●  | Rose/Copper  | ●    | Transparent |
| RC | ●   | ●  | Red/Copper   | ●    | Transparent |


Time delivery: 25 working days

*MoMa L / M bi-color*



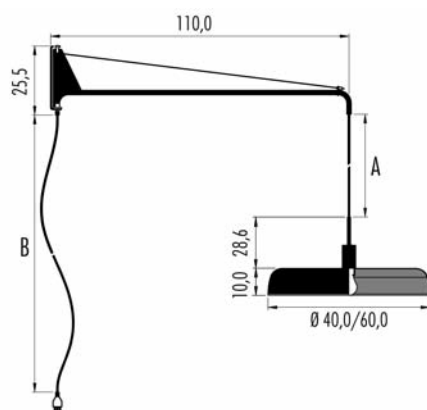

|                   |                          |                    |                       |   |
|-------------------|--------------------------|--------------------|-----------------------|---|
| IP20              | Ⓛ                        | A+B=300cm          | CE                    | ▽ |
| 220-240V          | e27                      | 4W CRI>80          | dimnable IGBT - Triac |   |
| <b>3M40L.12L.</b> | <input type="checkbox"/> | Ø 40cm             |                       |   |
| <b>3M60L.12L.</b> | <input type="checkbox"/> | Ø 60cm             |                       |   |
| <i>Led color</i>  | <i>Nominal lm</i>        | <i>Beam spread</i> |                       |   |
| 2700°K            | 470                      | 163°               |                       |   |

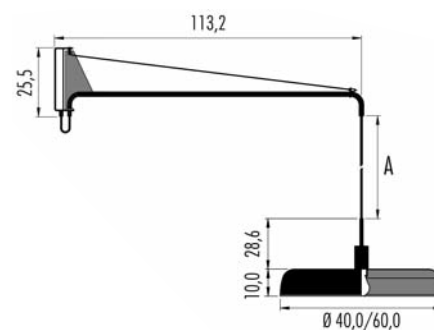



|                   |                          |                    |                       |   |
|-------------------|--------------------------|--------------------|-----------------------|---|
| IP20              | Ⓛ                        | A=130cm            | CE                    | ▽ |
| 220-240V          | e27                      | 4W CRI>80          | dimnable IGBT - Triac |   |
| <b>3M40M.12L.</b> | <input type="checkbox"/> | Ø 40cm             |                       |   |
| <b>3M60M.12L.</b> | <input type="checkbox"/> | Ø 60cm             |                       |   |
| <i>Led color</i>  | <i>Nominal lm</i>        | <i>Beam spread</i> |                       |   |
| 2700°K            | 470                      | 163°               |                       |   |

|    | Out | In | Frame | cable  | Bulb        |
|----|-----|----|-------|--------|-------------|
| KC | ●   | ●  | Black | Copper | Transparent |
| WC | ○   | ●  | White | Copper | Transparent |
| BC | ●   | ●  | Blue  | Copper | Transparent |
| GC | ●   | ●  | Green | Copper | Transparent |
| PC | ●   | ●  | Rose  | Copper | Transparent |
| RC | ●   | ●  | Red   | Copper | Transparent |

*Time delivery: 25 Working Days*



# Nelly

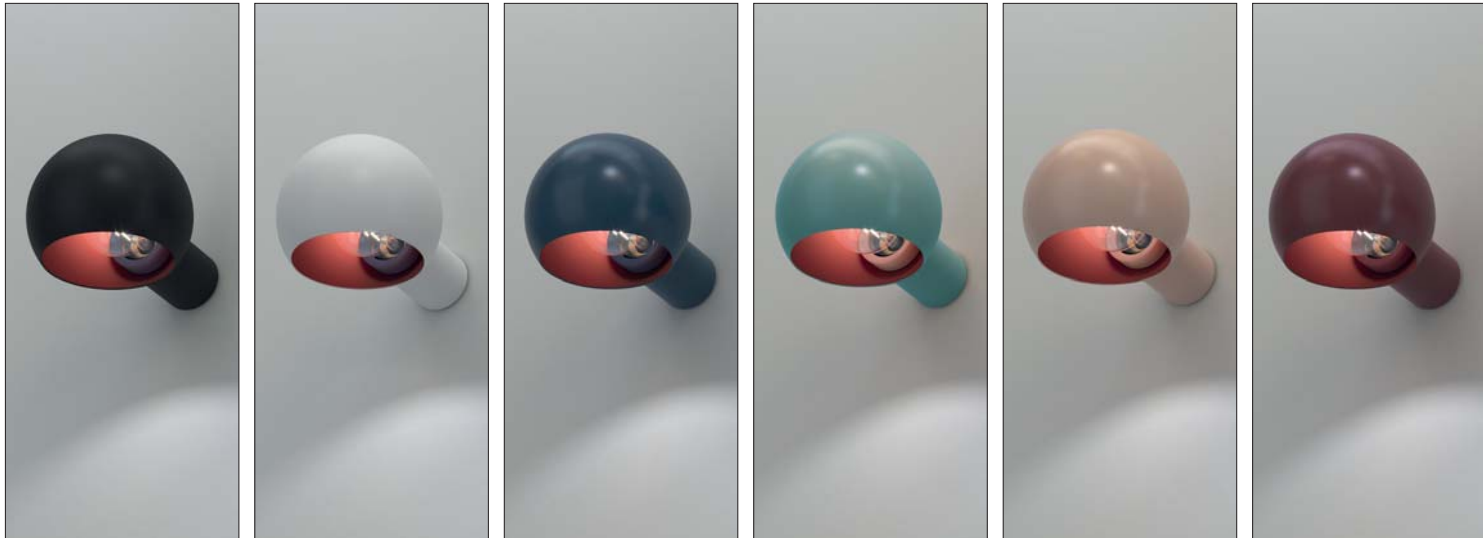

|                  |                   |                    |   |
|------------------|-------------------|--------------------|---|
| IP20             | Ⓛ                 | CE                 | ▽ |
| 220-240V         | e27 4W            | CRI>80             |   |
| <b>3N01.12L.</b> | □                 | dimm. IGBT - Triac |   |
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |   |
| 2700°K           | 470               | 360°               |   |



| □  | Out | In | Bulb |
|----|-----|----|------|
| KC | ●   | ●  | ●    |
| WC | ●   | ●  | ●    |
| BC | ●   | ●  | ●    |
| GC | ●   | ●  | ●    |
| PC | ●   | ●  | ●    |
| RC | ●   | ●  | ●    |

Black/Copper    White/Copper    Blue/Copper    Green/Copper    Rose/Copper    Red/Copper    Transparent    Transparent    Transparent    Transparent    Transparent    Transparent

Time delivery: 25 Working days  
Available from 30/09/2019



# Nemo

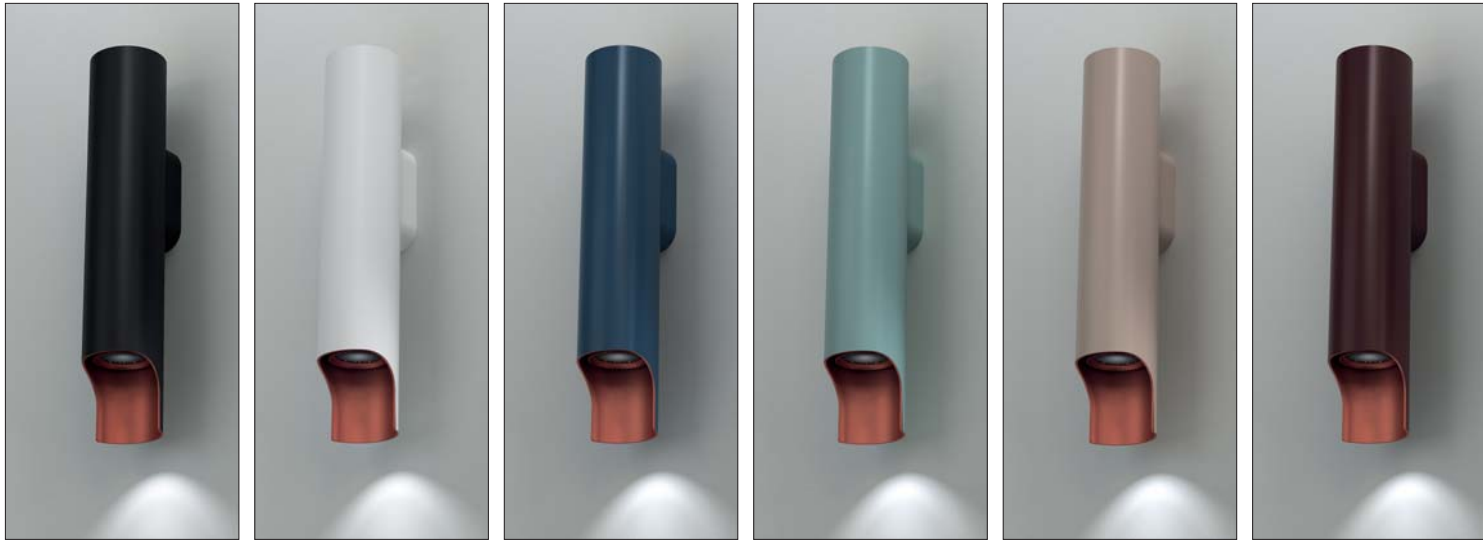

|                    |                       |                    |        |
|--------------------|-----------------------|--------------------|--------|
| IP20               | Flicker < 20%         | CE                 | MC-E=3 |
| 220-240V           | 9,5W CRI>90           | dim. IGBT - TRIAC  |        |
| <b>4N05.K2S.KC</b> | <i>With honeycomb</i> |                    |        |
| <b>4N05.K2S.WC</b> | <i>With honeycomb</i> |                    |        |
| <b>4N05.K2S.BC</b> | <i>With honeycomb</i> |                    |        |
| <b>4N05.K2S.GC</b> | <i>With honeycomb</i> |                    |        |
| <b>4N05.K2S.PC</b> | <i>With honeycomb</i> |                    |        |
| <b>4N05.K2S.RC</b> | <i>With honeycomb</i> |                    |        |
| <i>Led color</i>   | <i>Nominal lm</i>     | <i>Beam spread</i> |        |
| 2700°K             | 710                   | 24°                |        |


|    | Out | In |              |
|----|-----|----|--------------|
| KC |     |    | Black/Copper |
| WC |     |    | White/Copper |
| BC |     |    | Blue/Copper  |
| GC |     |    | Green/Copper |
| PC |     |    | Rose/Copper  |
| RC |     |    | Red/Copper   |

*Time delivery: 25 Working days*  
*Available from 30/09/2019*




*Pop Bijou* **New**



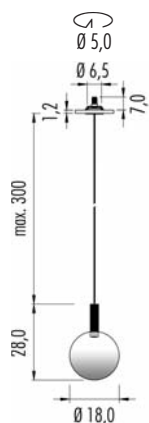

|                      |   |            |                       |   |
|----------------------|---|------------|-----------------------|---|
| IP40                 | © | <b>ARC</b> | CE                    | ▽ |
| 220-240V             |   | 6W CRI>90  | dimmable IGBT - Triac |   |
| <b>3BUA.2</b> ■ S. □ |   |            |                       |   |
| ■ Led color          |   | Nominal lm | Beam spread           |   |
| 2 = 2700 °K          |   | 528        | 25°                   |   |
| 3 = 3000 °K          |   | 552        |                       |   |




|                      |   |            |             |   |
|----------------------|---|------------|-------------|---|
| IP40                 | © | <b>CUP</b> | CE          | ▽ |
| 220-240V             |   | 6W CRI>90  | on/off      |   |
| <b>3BUC.2</b> ■ S. □ |   |            |             |   |
| ■ Led color          |   | Nominal lm | Beam spread |   |
| 2 = 2700 °K          |   | 528        | 25°         |   |
| 3 = 3000 °K          |   | 552        |             |   |


|    |                   |            |            |
|----|-------------------|------------|------------|
| □  | Cylinder          | ARC canopy | CUP canopy |
| 02 | ● Black           | White      | Black      |
| 06 | ○ White           | White      | Black      |
| C1 | ● Copper Anodized | White      | Black      |
| S1 | ● Brass Anodized  | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days  
 Available from 30/09/2019  
 Collection 2018 available until run out of stock.

# Filo System - Pop Bijou *New*



|             |            |             |
|-------------|------------|-------------|
| IP40        | CE         | CE          |
| 500 m/A     | 6W         | CRI>90      |
| 3BU1.2      | 12m Cable  |             |
| 3BU2.2      | 22m Cable  |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 528        | 25°         |
| 3 = 3000 °K | 552        |             |




|             |                    |               |
|-------------|--------------------|---------------|
| ARC Canopy  | for max 1 diffuser | White painted |
| 3FL5.ARC.06 | IGBT - Triac       |               |



|             |                         |               |
|-------------|-------------------------|---------------|
| CUP Canopy  | min. 3 max 12 diffusers | Black painted |
| 3FL5.029.02 | on/off                  |               |
| 3FL5.C29.02 | 0/1...10V               |               |
| 3FL5.F29.02 | DALI - Push             |               |




|             |                     |               |
|-------------|---------------------|---------------|
| CUP Canopy  | for max 2 diffusers | Black painted |
| 3FL5.CUP.02 | IGBT - Triac        |               |



|             |                         |               |
|-------------|-------------------------|---------------|
| CUP Canopy  | min. 6 max 24 diffusers | Black painted |
| 3FL5.033.02 | On/off                  |               |
| 3FL5.E33.02 | DALI - Push - 0/1...10V |               |




|                  |                    |               |
|------------------|--------------------|---------------|
| CUP with Plug-in | for max 1 diffuser | Black painted |
| 3FL5.PIN.02      | On/off             |               |



|                         |         |       |
|-------------------------|---------|-------|
| Wall - Ceiling Mounting |         |       |
| 1KIT.WM5.02             | 5 units | Black |
| 1KIT.WM8.02             | 8 units | Black |


Example 1 (18+18 art. Bijou)= 2 Cup Ø cm. 33

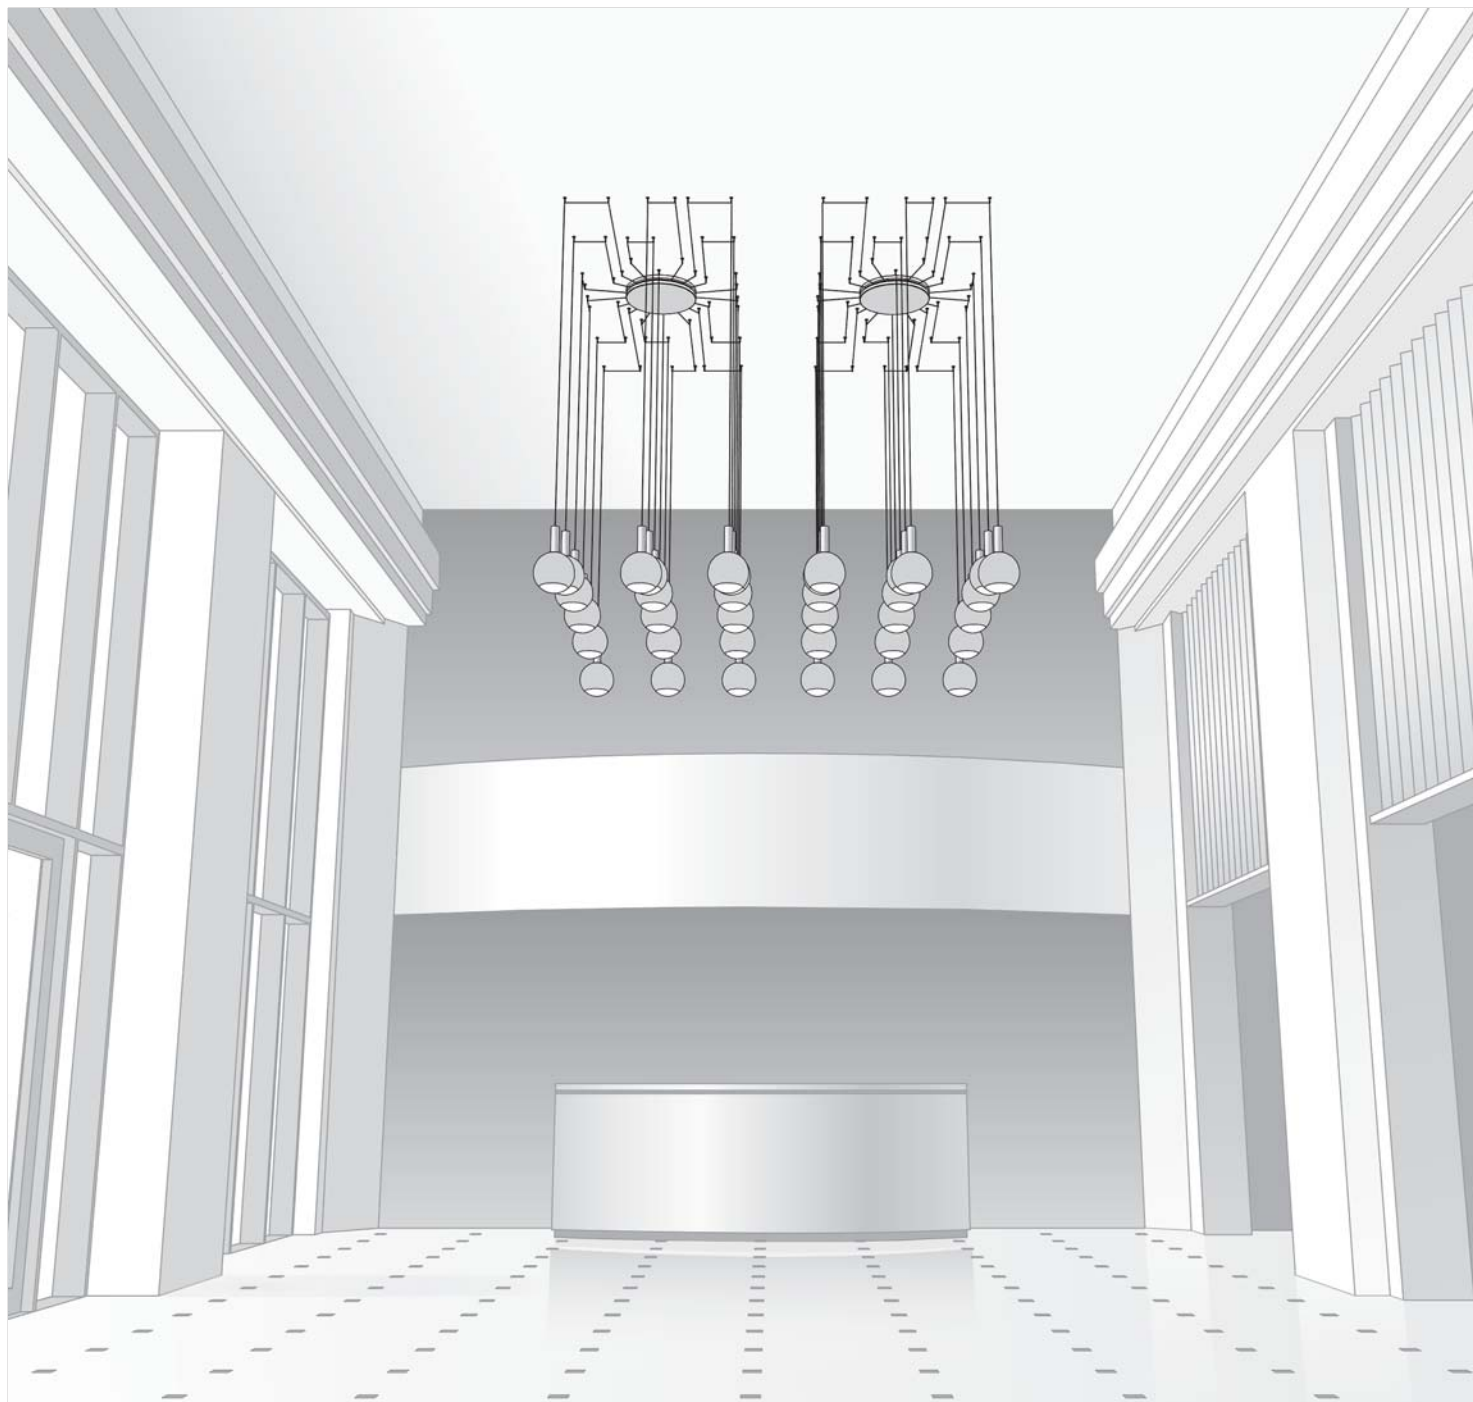




*Pop C'est Moi*



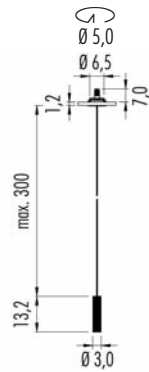

|                      |   |            |                       |   |
|----------------------|---|------------|-----------------------|---|
| IP20                 | © | <b>ARC</b> | CE                    | ▽ |
| 220-240V             |   | 6W CRI>90  | dimmable IGBT - Triac |   |
| <b>3CMA.2</b> ■ S. □ |   |            |                       |   |
| ■ Led color          |   | Nominal lm | Beam spread           |   |
| 2 = 2700 °K          |   | 528        | 20°                   |   |
| 3 = 3000 °K          |   | 552        |                       |   |



|                      |   |            |             |   |
|----------------------|---|------------|-------------|---|
| IP20                 | © | <b>CUP</b> | CE          | ▽ |
| 220-240V             |   | 6W CRI>90  | on/off      |   |
| <b>3CMC.2</b> ■ S. □ |   |            |             |   |
| ■ Led color          |   | Nominal lm | Beam spread |   |
| 2 = 2700 °K          |   | 528        | 20°         |   |
| 3 = 3000 °K          |   | 552        |             |   |


| □  | Diffuser color | ARC canopy | CUP canopy |
|----|----------------|------------|------------|
| 02 | ● Black        | White      | Black      |
| 06 | ○ White        | White      | Black      |
| B  | ● Blue         | White      | Black      |
| C  | ● Copper       | White      | Black      |
| G  | ● Green        | White      | Black      |
| P  | ● Rose         | White      | Black      |
| R  | ● Red          | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days

# Filo System - Pop C'est Moi



|             |            |             |
|-------------|------------|-------------|
| IP20        | CE         |             |
| 500 m/A     | 6W         | CRI>90      |
| 3CM1.2      | S. □       | 12m Cable   |
| 3CM2.2      | S. □       | 22m Cable   |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |




**ARC Canopy** © for max 1 diffuser White painted  
**3FL5.ARC.06** IGBT - Triac



**CUP Canopy** © min. 3 max 12 diffusers Black painted  
**3FL5.029.02** on/off  
**3FL5.C29.02** 0/1...10V  
**3FL5.F29.02** DALI - Push




**CUP Canopy** © for max 2 diffusers Black painted  
**3FL5.CUP.02** IGBT - Triac



**CUP Canopy** © min. 6 max 24 diffusers Black painted  
**3FL5.033.02** On/off  
**3FL5.E33.02** DALI - Push - 0/1...10V




**CUP with Plug-in** © for max 1 diffuser Black painted  
**3FL5.PIN.02** On/off




**Wall - Ceiling Mounting**  
**1KIT.WM5.02** 5 units Black  
**1KIT.WM8.02** 8 units Black

Example 2 (6 art. C'est Moi) = Cup Ø cm. 29

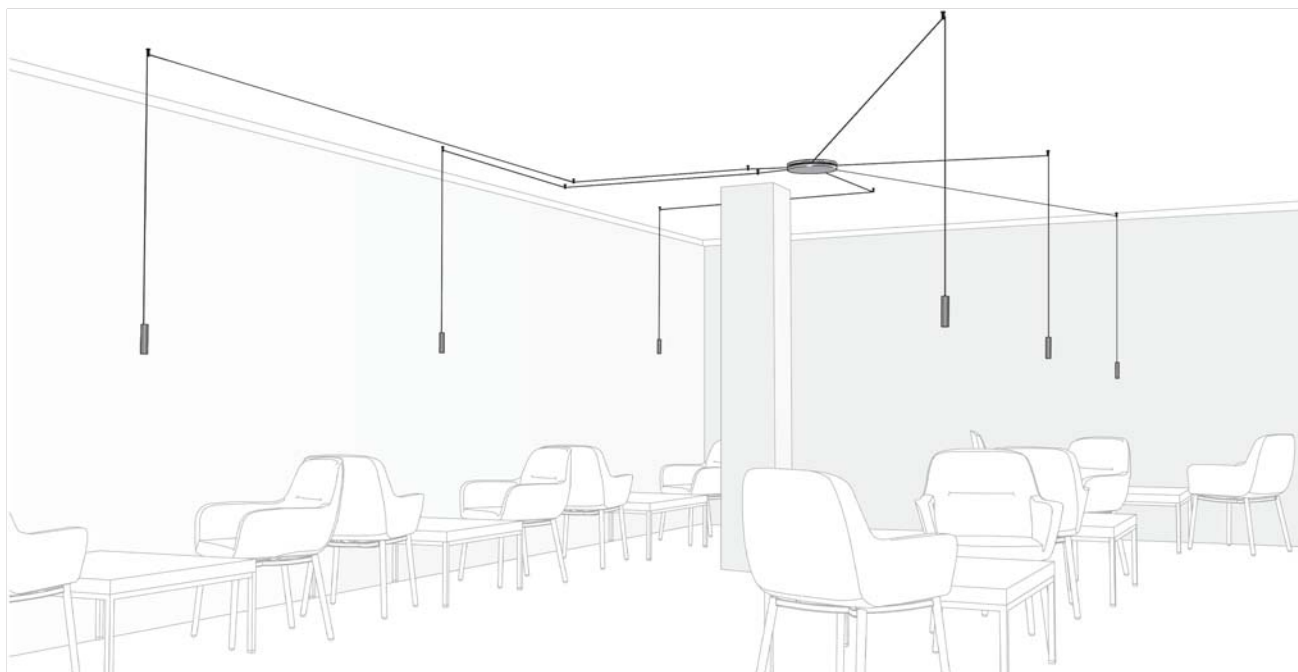


Example 3 (9 art. C'est Moi) = Cup Ø cm. 29

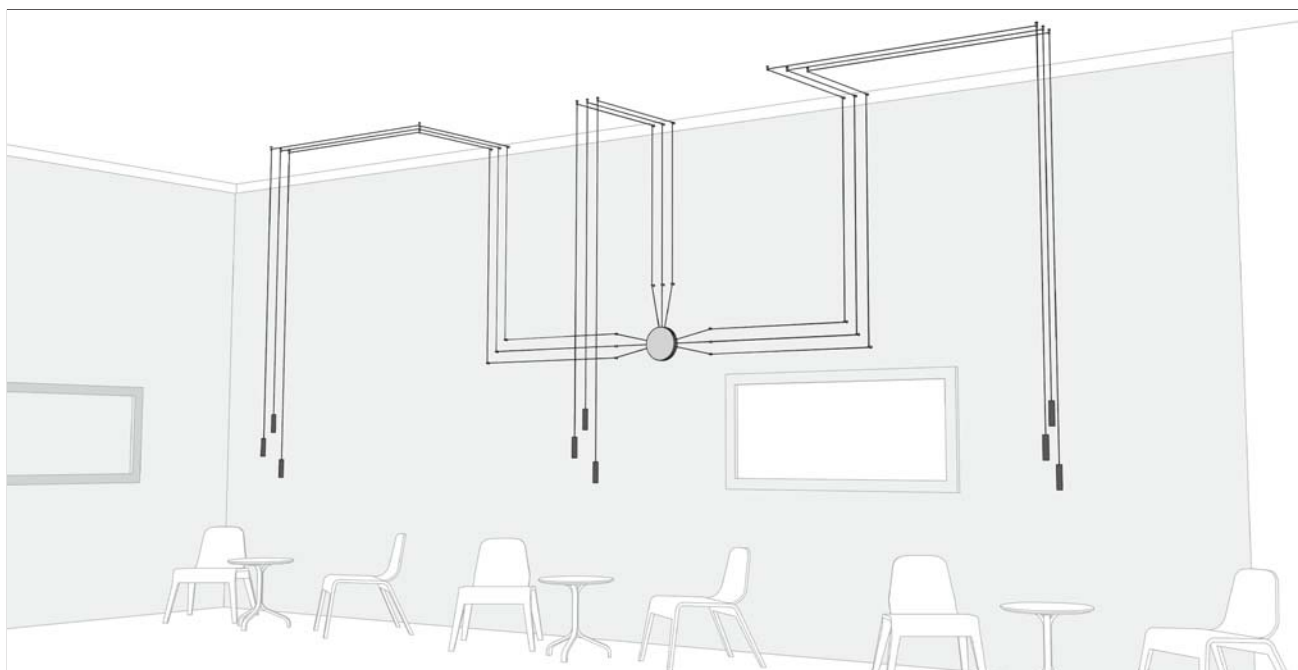

*Pop C'est Toi*




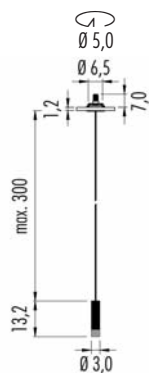

IP20 © **ARC** CE ▽  
 220-240V 6W CRI>90 dimmable IGBT - Triac

**3CTA.2** ■ S. □

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |



IP20 © **CUP** CE ▽  
 220-240V 6W CRI>90 on/off

**3CTC.2** ■ S. □

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |


| □  | Diffuser color    | ARC canopy | CUP canopy |
|----|-------------------|------------|------------|
| 02 | ● Black           | White      | Black      |
| 06 | ○ White           | White      | Black      |
| C1 | ● Copper Anodized | White      | Black      |
| S1 | ● Brass Anodized  | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days  
 Available from 30/09/2019  
 Collection 2018 available until run out of stock.

# Filo System - Pop C'est Toi



|             |            |             |
|-------------|------------|-------------|
| IP20        | CE         | CE          |
| 500 m/A     | 6W         | CRI>90      |
| 3CT1.2 S. □ | 12m Cable  |             |
| 3CT2.2 S. □ | 22m Cable  |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |




**ARC Canopy** © for max 1 diffuser White painted  
**3FL5.ARC.06** IGBT - Triac



**CUP Canopy** © min. 3 max 12 diffusers Black painted  
**3FL5.029.02** on/off  
**3FL5.C29.02** 0/1...10V  
**3FL5.F29.02** DALI - Push




**CUP Canopy** © for max 2 diffusers Black painted  
**3FL5.CUP.02** IGBT - Triac



**CUP Canopy** © min. 6 max 24 diffusers Black painted  
**3FL5.033.02** On/off  
**3FL5.E33.02** DALI - Push - 0/1...10V



**CUP with Plug-in** © for max 1 diffuser Black painted  
**3FL5.PIN.02** On/off




*Wall - Ceiling Mounting*  
**1KIT.WM5.02** 5 units Black  
**1KIT.WM8.02** 8 units Black

Example 4 (8 art. *C'est Toi*)= Cup Ø cm. 29






# Pop Chérie *New*



|          |            |                       |
|----------|------------|-----------------------|
| IP20 ©   | <b>ARC</b> | CE ▼                  |
| 220-240V | 6W CRI>90  | dimnable IGBT - Triac |

**3CEA.2** ■ S. □

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |



|          |            |        |
|----------|------------|--------|
| IP20 ©   | <b>CUP</b> | CE ▼   |
| 220-240V | 6W CRI>90  | on/off |

**3CEC.2** ■ S. □

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 528        | 20°         |
| 3 = 3000 °K | 552        |             |

| □    | Diffuser color | ARC canopy | CUP canopy |
|------|----------------|------------|------------|
| 02 ● | Black          | White      | Black      |
| 06 ○ | White          | White      | Black      |
| B ●  | Blue           | White      | Black      |
| C ●  | Copper         | White      | Black      |
| G ●  | Green          | White      | Black      |
| P ●  | Rose           | White      | Black      |
| R ●  | Red            | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days


Available from 30/09/2019

Collection 2018 available until run out of stock.


# Filo System - Pop Chérie *New*



|             |            |             |        |
|-------------|------------|-------------|--------|
| IP40        | CE         | 6W          | CRI>90 |
| 500 m/A     |            | 12m Cable   |        |
| 3CE1.2 S. □ |            | 22m Cable   |        |
| 3CE2.2 S. □ |            |             |        |
| ■ Led color | Nominal lm | Beam spread |        |
| 2 = 2700 °K | 528        | 20°         |        |
| 3 = 3000 °K | 552        |             |        |




|              |                    |               |
|--------------|--------------------|---------------|
| ARC Canopy © | for max 1 diffuser | White painted |
| 3FL5.ARC.06  | IGBT - Triac       |               |



|              |                         |               |
|--------------|-------------------------|---------------|
| CUP Canopy © | min. 3 max 12 diffusers | Black painted |
| 3FL5.029.02  | on/off                  |               |
| 3FL5.C29.02  | 0/1...10V               |               |
| 3FL5.F29.02  | DALI - Push             |               |




|              |                     |               |
|--------------|---------------------|---------------|
| CUP Canopy © | for max 2 diffusers | Black painted |
| 3FL5.CUP.02  | IGBT - Triac        |               |



|              |                         |               |
|--------------|-------------------------|---------------|
| CUP Canopy © | min. 6 max 24 diffusers | Black painted |
| 3FL5.033.02  | On/off                  |               |
| 3FL5.E33.02  | DALI - Push - 0/1...10V |               |




|                    |                    |               |
|--------------------|--------------------|---------------|
| CUP with Plug-in © | for max 1 diffuser | Black painted |
| 3FL5.PIN.02        | On/off             |               |




|                         |         |       |
|-------------------------|---------|-------|
| Wall - Ceiling Mounting |         |       |
| 1KIT.WM5.02             | 5 units | Black |
| 1KIT.WM8.02             | 8 units | Black |

*Pop Chapeau* **New**



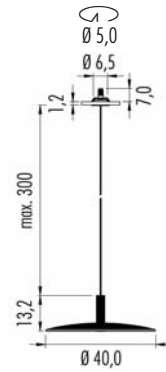

|                      |            |                       |
|----------------------|------------|-----------------------|
| IP20 ©               | <b>ARC</b> | CE ▽                  |
| 220-240V             | 6W CRI>90  | dimnable IGBT - Triac |
| <b>3CHA.2</b> ■ S. □ |            |                       |
| ■ Led color          | Nominal lm | Beam spread           |
| 2 = 2700 °K          | 528        | 20°                   |
| 3 = 3000 °K          | 552        |                       |




|                      |            |             |
|----------------------|------------|-------------|
| IP20 ©               | <b>CUP</b> | CE ▽        |
| 220-240V             | 6W CRI>90  | on/off      |
| <b>3CHC.2</b> ■ S. □ |            |             |
| ■ Led color          | Nominal lm | Beam spread |
| 2 = 2700 °K          | 528        | 20°         |
| 3 = 3000 °K          | 552        |             |


| □   | Up | Down |                       | ARC canopy | CUP canopy |
|-----|----|------|-----------------------|------------|------------|
| 02  | ●  | ●    | Black/Black           | White      | Black      |
| 06  | ○  | ○    | White/White           | White      | Black      |
| C1K | ●  | ●    | Copper Anodized/Black | White      | Black      |
| C1W | ●  | ○    | Copper Anodized/White | White      | Black      |
| S1K | ●  | ●    | Brass Anodized/Black  | White      | Black      |
| S1W | ●  | ○    | Brass Anodized/White  | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days  
 Available from 30/09/2019  
 Collection 2018 available until run out of stock.

# Filo System - Pop Chapeau *New*



|             |            |             |          |
|-------------|------------|-------------|----------|
| IP20        | CE         | 6W          | CRI > 90 |
| 500 m/A     |            |             |          |
| 3CH1.2      | S. □       | 12m Cable   |          |
| 3CH2.2      | S. □       | 22m Cable   |          |
| ■ Led color | Nominal lm | Beam spread |          |
| 2 = 2700 °K | 528        | 20°         |          |
| 3 = 3000 °K | 552        |             |          |




|             |   |                    |               |
|-------------|---|--------------------|---------------|
| ARC Canopy  | © | for max 1 diffuser | White painted |
| 3FL5.ARC.06 |   | IGBT - Triac       |               |



|             |   |                         |               |
|-------------|---|-------------------------|---------------|
| CUP Canopy  | © | min. 3 max 12 diffusers | Black painted |
| 3FL5.029.02 |   | on/off                  |               |
| 3FL5.C29.02 |   | 0/1...10V               |               |
| 3FL5.F29.02 |   | DALI - Push             |               |




|             |   |                     |               |
|-------------|---|---------------------|---------------|
| CUP Canopy  | © | for max 2 diffusers | Black painted |
| 3FL5.CUP.02 |   | IGBT - Triac        |               |



|             |   |                         |               |
|-------------|---|-------------------------|---------------|
| CUP Canopy  | © | min. 6 max 24 diffusers | Black painted |
| 3FL5.033.02 |   | On/off                  |               |
| 3FL5.E33.02 |   | DALI - Push - 0/1...10V |               |



|                  |   |                    |               |
|------------------|---|--------------------|---------------|
| CUP with Plug-in | © | for max 1 diffuser | Black painted |
| 3FL5.PIN.02      |   | On/off             |               |




|                         |  |         |       |
|-------------------------|--|---------|-------|
| Wall - Ceiling Mounting |  |         |       |
| 1KIT.WM5.02             |  | 5 units | Black |
| 1KIT.WM8.02             |  | 8 units | Black |

Example 5 (6 art. *Chapeau*)= Cup Ø cm. 29



# Pop BonBon



|                    |   |                   |                    |     |
|--------------------|---|-------------------|--------------------|-----|
| IP20               | © | <b>ARC</b>        | CE                 | ▽   |
| 220-240V           |   | 8W CRI>90         | on/off             |     |
| <b>3BBA.2</b>      | ■ | S.02              |                    |     |
| <b>3BBA.2</b>      | ■ | S.06              |                    |     |
| <b>3BBA.2</b>      | ■ | S.BC              |                    |     |
| <b>3BBA.2</b>      | ■ | S.GC              |                    |     |
| <b>3BBA.2</b>      | ■ | S.PC              |                    |     |
| <b>3BBA.2</b>      | ■ | S.CR              |                    |     |
| ■ <i>Led color</i> |   | <i>Nominal lm</i> | <i>Beam spread</i> |     |
| 2                  |   | 2700 °K           | 893                | 22° |
| 3                  |   | 3000 °K           | 939                |     |



|                    |   |                   |                    |     |
|--------------------|---|-------------------|--------------------|-----|
| IP20               | © | <b>CUP</b>        | CE                 | ▽   |
| 220-240V           |   | 8W CRI>90         | on/off             |     |
| <b>3BBC.2</b>      | ■ | S.02              |                    |     |
| <b>3BBC.2</b>      | ■ | S.06              |                    |     |
| <b>3BBC.2</b>      | ■ | S.BC              |                    |     |
| <b>3BBC.2</b>      | ■ | S.GC              |                    |     |
| <b>3BBC.2</b>      | ■ | S.PC              |                    |     |
| <b>3BBC.2</b>      | ■ | S.CR              |                    |     |
| ■ <i>Led color</i> |   | <i>Nominal lm</i> | <i>Beam spread</i> |     |
| 2                  |   | 2700 °K           | 893                | 22° |
| 3                  |   | 3000 °K           | 939                |     |


|    | Up | Down |              | ARC canopy | CUP canopy |
|----|----|------|--------------|------------|------------|
| 02 | ●  | ●    | Black/Black  | White      | Black      |
| 06 | ○  | ○    | White/White  | White      | Black      |
| BC | ●  | ●    | Blue/Copper  | White      | Black      |
| GC | ●  | ●    | Green/Copper | White      | Black      |
| PC | ●  | ●    | Rose/Copper  | White      | Black      |
| CR | ●  | ●    | Copper/Red   | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days

# Filo System - Pop BonBon



|               |            |             |        |
|---------------|------------|-------------|--------|
| IP20          | ©          | CE          | ▽      |
| 250 m/A       |            | 8W          | CRI>90 |
| 3BB1.2 ■ S.02 |            | 12m Cable   |        |
| 3BB1.2 ■ S.06 |            | 12m Cable   |        |
| 3BB1.2 ■ S.BC |            | 12m Cable   |        |
| 3BB1.2 ■ S.GC |            | 12m Cable   |        |
| 3BB1.2 ■ S.PC |            | 12m Cable   |        |
| 3BB1.2 ■ S.CR |            | 12m Cable   |        |
| 3BB2.2 ■ S.02 |            | 22m Cable   |        |
| 3BB2.2 ■ S.06 |            | 22m Cable   |        |
| 3BB2.2 ■ S.BC |            | 22m Cable   |        |
| 3BB2.2 ■ S.GC |            | 22m Cable   |        |
| 3BB2.2 ■ S.PC |            | 22m Cable   |        |
| 3BB2.2 ■ S.CR |            | 22m Cable   |        |
| ■ Led color   | Nominal lm | Beam spread |        |
| 2 = 2700 °K   | 893        | 22°         |        |
| 3 = 3000 °K   | 939        |             |        |



|              |                    |               |
|--------------|--------------------|---------------|
| ARC Canopy © | for max 1 diffuser | White painted |
| 3FL2.ARC.06  | On/off             |               |




|              |                     |               |
|--------------|---------------------|---------------|
| CUP Canopy © | for max 2 diffusers | Black painted |
| 3FL2.CUP.02  | On/off              |               |



|              |                    |               |
|--------------|--------------------|---------------|
| CUP Canopy © | for max 1 diffuser | Black painted |
| 3FL2.PIN.02  | On/off             |               |



|              |                        |               |
|--------------|------------------------|---------------|
| CUP Canopy © | min. 3 max 3 diffusers | Black painted |
| 3FL2.029.02  | On/off                 |               |
| 3FL2.F29.02  | DALI - Push            |               |



|              |                         |               |
|--------------|-------------------------|---------------|
| CUP Canopy © | min. 6 max 6 diffusers  | Black painted |
| 3FL2.033.02  | On/off                  |               |
| CUP Canopy © | min. 3 max 9 diffusers  | Black painted |
| 3FL2.E33.02  | DALI - Push - 0/1...10V |               |



|                         |         |       |
|-------------------------|---------|-------|
| Wall - Ceiling Mounting |         |       |
| 1KIT.WM5.02             | 5 units | Black |




|             |         |       |
|-------------|---------|-------|
| 1KIT.WM8.02 | 8 units | Black |
|-------------|---------|-------|



*Pop Petit*




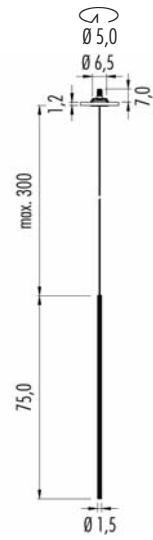

IP54 © **ARC** CE ▽  
 220-240V 2,3W CRI>90 on/off

**3PTA.2** ■ L. □

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 237        | 60°         |
| 3 = 3000 °K | 256        |             |



IP20 © **CUP** CE ▽  
 220-240V 2,3W CRI>90 on/off


**3PTC.2** ■ L. □

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 237        | 60°         |
| 3 = 3000 °K | 256        |             |


| □  | Diffuser color | ARC canopy | CUP canopy |
|----|----------------|------------|------------|
| 02 | ● Black        | White      | Black      |
| 06 | ○ White        | White      | Black      |
| B  | ● Blue         | White      | Black      |
| C  | ● Copper       | White      | Black      |
| G  | ● Green        | White      | Black      |
| P  | ● Rose         | White      | Black      |
| R  | ● Red          | White      | Black      |

Black coaxial power supply cable. Time delivery: 25 Working Days


# Filo System - Pop Petit



|             |            |             |
|-------------|------------|-------------|
| IP40        | CE         | CE          |
| 700 m/A     | 6W         | CRI>90      |
| 3PT1.2      | 12m Cable  |             |
| 3PT2.2      | 22m Cable  |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 528        | 60°         |
| 3 = 3000 °K | 552        |             |




|             |                    |               |
|-------------|--------------------|---------------|
| ARC Canopy  | for max 1 diffuser | White painted |
| 3FL7.ARC.06 | IGBT - Triac       |               |



|             |                         |               |
|-------------|-------------------------|---------------|
| CUP Canopy  | min. 3 max 12 diffusers | Black painted |
| 3FL7.029.02 | on/off                  |               |
| 3FL7.F29.02 | DALI - Push             |               |



|             |                     |               |
|-------------|---------------------|---------------|
| CUP Canopy  | for max 2 diffusers | Black painted |
| 3FL7.CUP.02 | IGBT - Triac        |               |




|             |                         |               |
|-------------|-------------------------|---------------|
| CUP Canopy  | min. 6 max 24 diffusers | Black painted |
| 3FL7.033.02 | On/off                  |               |



|                  |                    |               |
|------------------|--------------------|---------------|
| CUP with Plug-in | for max 1 diffuser | Black painted |
| 3FL7.PIN.02      | On/off             |               |

|             |                         |               |
|-------------|-------------------------|---------------|
| CUP Canopy  | min. 3 max 24 diffusers | Black painted |
| 3FL7.E33.02 | DALI - Push - 0/1...10V |               |





|                         |         |       |
|-------------------------|---------|-------|
| Wall - Ceiling Mounting |         |       |
| 1KIT.WM5.02             | 5 units | Black |
| 1KIT.WM8.02             | 8 units | Black |

Example 6 (24 art. **Petit**)= Cup Ø cm. 33





## Pop 00 Ø 3,0 trimless (for plasterboard and brickwork)

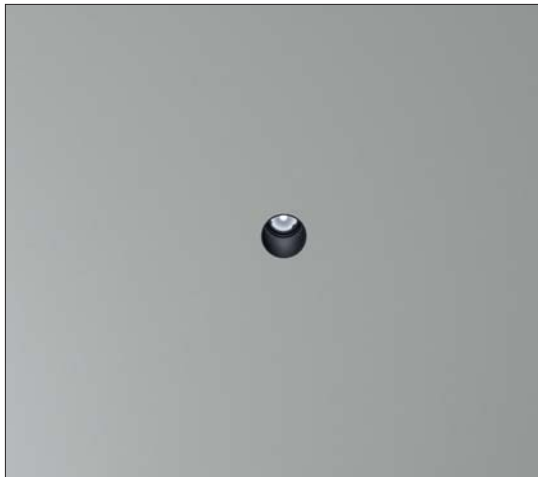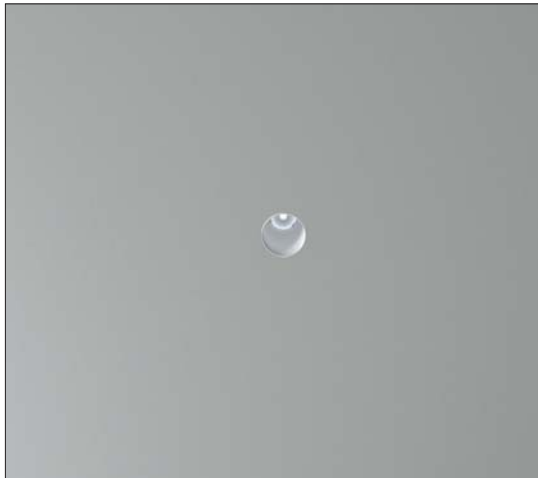

|      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Finishes C1 and S1 are available from 30/09/2019



|                      |        |        |
|----------------------|--------|--------|
| <b>IP40</b> ☉        | MC-E=3 | CE ▼ Ⓢ |
| 500m/A               | LED 6W | CRI>90 |
| <b>3P00.3</b> ■ M. □ |        |        |

|                       |        |        |
|-----------------------|--------|--------|
| <b>IP54</b> ☉         | MC-E=3 | CE ▼ Ⓢ |
| 500m/A                | LED 6W | CRI>90 |
| <b>3P00.3</b> ■ M9. □ |        |        |

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 528        | 17°           |
| 3 = 3000 °K | 552        |               |

☉ (m-M) Driver ONLY in remote installation

- 3KIT.500.15** (1-1) on/off
- 3KIT.501.50** (1-7) DALI - Push - 1...10V
- 3KIT.502.20** (1-3) DALI
- 3KIT.503.20** (1-3) Push - 1...10
- 3KIT.504.10** (1-1) IGBT - TRIAC

Housing for plasterboard

- **1Z00.030.01** ⤷ Ø 4,0cm

Housing for brickwork

- **1M00.030.01**


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 00 NaNo Ø 3,0 trimless (only for plasterboard)




|                          |                   |
|--------------------------|-------------------|
| <input type="checkbox"/> | Frame             |
| 02                       | ● Black           |
| 06                       | ○ White           |
| C1                       | ● Copper Anodized |
| S1                       | ● Brass Anodized  |

Available from 30/09/2019



|  |        |        |  |  |
|--|--------|--------|--|--|
| <b>IP40</b>  | MC-E=3 |        |  |  |
| 500m/A   | LED 6W | CRI>90 |  |  |
| <b>3N00.3</b> <input type="checkbox"/> M. <input type="checkbox"/> |        |        |  |  |



|   |        |        |  |  |
|---|--------|--------|--|--|
| <b>IP54</b>   | MC-E=3 |        |  |  |
| 500m/A  | LED 6W | CRI>90 |  |  |
| <b>3N00.3</b> <input type="checkbox"/> M9. <input type="checkbox"/> |        |        |  |  |

| <input type="checkbox"/> Led color | Nominal lm | Beam spread |
|------------------------------------|------------|-------------|
| 2 = 2700 °K                        | 528        | 25°         |
| 3 = 3000 °K                        | 552        |             |

© (m-M) Driver **ONLY** in remote installation

- 3KIT.500.15** (1-1) on/off
- 3KIT.501.50** (1-7) DALI - Push - 1...10V
- 3KIT.502.20** (1-3) DALI
- 3KIT.503.20** (1-3) Push - 1...10
- 3KIT.504.10** (1-1) IGBT - TRIAC

Pop 00 NaNo: housing for plasterboard

- **1N00.030.01** Ø 4,0cm



(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## easy Pop 00 Ø 3,0 with trim (for plasterboard and brickwork)



|      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Available from 30/09/2019




|                      |        |        |
|----------------------|--------|--------|
| <b>IP40</b> ☉        | MC-E=3 | CE ▽ Ⓢ |
| 500m/A               | LED 6W | CRI>90 |
| <b>3E00.3</b> ■ M. □ |        |        |

|                       |        |        |
|-----------------------|--------|--------|
| <b>IP54</b> ☉         | MC-E=3 | CE ▽ Ⓢ |
| 500m/A                | LED 6W | CRI>90 |
| <b>3E00.3</b> ■ M9. □ |        |        |

| ■ Led color | Nominal lm | ▴ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 528        | 17°           |
| 3 = 3000 °K | 552        |               |

☉ (m-M) Driver ONLY in remote installation

|                          |                       |
|--------------------------|-----------------------|
| <b>3KIT.500.15</b> (1-1) | on/off                |
| <b>3KIT.501.50</b> (1-7) | DALI - Push - 1...10V |
| <b>3KIT.502.20</b> (1-3) | DALI                  |
| <b>3KIT.503.20</b> (1-3) | Push - 1...10         |
| <b>3KIT.504.10</b> (1-1) | IGBT - TRIAC          |



Housing for brickwork

- **1E00.030.01**


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

easy Pop 00 NaNo Ø 3,0 with trim (for plasterboard and brickwork)



- Frame
- |    |   |                 |
|----|---|-----------------|
| 02 | ● | Black           |
| 06 | ○ | White           |
| C1 | ● | Copper Anodized |
| S1 | ● | Brass Anodized  |

Available from 30/09/2019



IP40 © MC-E=3 CE V

500m/A LED 6W CRI>90

3F00.3 ■ M. □

IP54 © MC-E=3 CE V


500m/A LED 6W CRI>90

3F00.3 ■ M9. □

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 528        | 25°           |
| 3 = 3000 °K | 552        |               |

© (m-M) Driver ONLY in remote installation

- 3KIT.500.15 (1-1) on/off
- 3KIT.501.50 (1-7) DALI - Push - 1...10V
- 3KIT.502.20 (1-3) DALI
- 3KIT.503.20 (1-3) Push - 1...10
- 3KIT.504.10 (1-1) IGBT - TRIAC




Housing for brickwork

- 1E00.030.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## Pop 01 Ø 4,0 trimless (only for plasterboard)



**IP40**

12V

**3P01.200.** **GU4** max 35W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

**IP40**

500m/A

**LED 6W**

CRI>90

**3P01.2** **S.**

**IP54**

500m/A

**LED 6W**

CRI>90

**3P01.2** **S9.**

*Led color* *Nominal lm* *Beam spread*

**2 = 2700°K**

528

22°

**3 = 3000°K**

552

(m-M) Driver

**3KIT.500.15** (1-1) on/off

**3KIT.501.50** (1-7) DALI - Push - 1...10V  
Remote installation

**3KIT.502.20** (1-3) DALI  
Remote installation

**3KIT.503.20** (1-3) Push - 1...10  
Remote installation

**3KIT.504.10** (1-1) IGBT - TRIAC  
Remote installation

*Frame*

**02** Black

**06** White

**C1** Copper Anodized

**S1** Brass Anodized

*Finishes C1 and S1 are available from 30/09/2019*


|             | Pop P01  | P    | P1  |
|-------------|----------|------|-----|
| 3P01.200.   | led IP40 | 9,1  | 3,9 |
| 3P01.2  S.  | led IP40 | 13,2 | 3,9 |
| 3P01.2  S9. | led IP54 | 14,0 | 3,9 |

Housing for plasterboard

**1Z00.040.01** Ø 5,1cm

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

## easy Pop 01 $\varnothing 4,0$ with trim (for plasterboard and brickwork)




|                            |                  |                    |                    |        |  |
|----------------------------|------------------|--------------------|--------------------|--------|--|
| <b>IP40</b>                |                  |                    |                    |        |  |
| 12V                        |                  |                    |                    |        |  |
| <b>3E01.200.</b>           |                  | <b>GU4</b> max 35W |                    |        |  |
| <b>3KIT.201.050</b>        |                  | max 50VA           |                    |        |  |
| <i>Dimmable gear: IGBT</i> |                  |                    |                    |        |  |
| <b>IP40</b>                |                  | MC-E=3             |                    |        |  |
| 500m/A                     |                  | <b>LED 6W</b>      |                    | CRI>90 |  |
| <b>3E01.2</b> <b>S.</b>    |                  |                    |                    |        |  |
| <b>IP54</b>                |                  | MC-E=3             |                    |        |  |
| 500m/A                     |                  | <b>LED 6W</b>      |                    | CRI>90 |  |
| <b>3E01.2</b> <b>S9.</b>   |                  |                    |                    |        |  |
|                            | <i>Led color</i> | <i>Nominal lm</i>  | <i>Beam spread</i> |        |  |
| <b>2</b>                   | 2700 °K          | 528                | 22°                |        |  |
| <b>3</b>                   | 3000 °K          | 552                |                    |        |  |

|           |                 |
|-----------|-----------------|
|           | Frame           |
| <b>02</b> | Black           |
| <b>06</b> | White           |
| <b>C1</b> | Copper Anodized |
| <b>S1</b> | Brass Anodized  |

Available from 30/09/2019

|             | Pop E01  | P    | P1  |
|-------------|----------|------|-----|
| 3E01.200.   | led IP40 | 9,1  | 3,9 |
| 3E01.2  S.  | led IP40 | 13,2 | 3,9 |
| 3E01.2  S9. | led IP54 | 14,0 | 3,9 |



Housing for brickwork

- **1E00.040.01**


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop 01 Ø 5,5 trimless (for plasterboard and brickwork)



| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Finishes C1 and S1 are available from 30/09/2019



| Pop P01     |                            | P    | P1  |
|-------------|----------------------------|------|-----|
| 3P01.210.□  | GU10                       | 13,2 | 4,4 |
| 3P01.211.□  | GU10 led                   | —    | 4,4 |
| 4P01.211.□  | GU10 led + honeycomb       | —    | 4,4 |
| 3P01.220.□  | GU5.3                      | 11,6 | 4,4 |
| 4P01.220.□  | GU5.3 led + honeycomb      | —    | 4,4 |
| 3P01.2209.□ | GU5.3 IP44                 | 13,0 | 3,4 |
| 4P01.2209.□ | GU5.3 IP44 led + honeycomb | —    | 3,4 |
| 3P01.K■S.□  | led 9,5W IP40              | 13,8 | 4,4 |
| 4P01.K■S.□  | led 9,5W IP40 + honeycomb  | 14,3 | 4,4 |

IP20

220V ÷ 240V

3P01.210.□ GU10 max 50W

3P01.211.□ GU10 led

4P01.211.□ GU10 led

With honeycomb

IP20

12V

3P01.220.□ GU5.3 max 50W

4P01.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP44

12V

3P01.2209.□ GU5.3 max 35W

4P01.2209.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

LED 9,5W CRI>90

3P01.K■S.□ dimm IGBT - TRIAC

4P01.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color Nominal lm ▲ Beam spread

2 = 2700 °K 710 24°

3 = 3000 °K 760

Housing for plasterboard Ø 6,5cm

- 1Z00.055.01 Single
- 1Z00.055.2L Double
- 1Z00.055.3L Triple

Housing for brickwork

- 1M00.055.01



**IP40** © **DimToWarm** CE ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3P01.3W** □ dimm IGBT - TRIAC  
**4P01.3W** □ dimm IGBT - TRIAC  
*With honeycomb*

**IP54** © **DimToWarm** CE ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3P01.3W** □ dimm IGBT - TRIAC  
**4P01.3W** □ dimm IGBT - TRIAC  
*With honeycomb*

■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**W** = max 3000°K    max 445 lm    **M** = 30°  
                          min. 1800°K    min. 10 lm    **S** = 18°

**IP40** © MC-E=3 CE ▽ Ⓢ  
 350m/A **LED 11W** CRI>90  
**3P01.3** □  
**4P01.3** □  
*With honeycomb*


**IP54** © MC-E=3 CE ▽ Ⓢ  
 350m/A **LED 11W** CRI>90  
**3P01.3** □  
**4P01.3** □  
*With honeycomb*

■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**2** = 2700°K    1195    **S** = 22°  
**3** = 3000°K    1257    **T** = 12°  
**4** = 4000°K    1313

- © (m-M) Driver
- 3KIT.350.1L** (1-1) on/off
- 3KIT.351.40** (1-3) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.352.15** (1-1) DALI
- 3KIT.353.15** (1-1) Push - 1...10V
- 3KIT.354.18** (1-1) IGBT - TRIAC
- Emergency unit: (inverter + battery, Driver not included)
- 3KIT.900.01** (1-1) 1:00 hour
- 3KIT.900.03** (1-1) 3:00 hours

- *Frame*
- 02** ● Black
  - 06** ○ White
  - C1** ● Copper Anodized
  - S1** ● Brass Anodized

*Finishes C1 and S1 are available from 30/09/2019*



|         | Pop P01              | P    | P1  |
|---------|----------------------|------|-----|
| 3P01.3  | led IP40             | 13,8 | 4,4 |
| 4P01.3  | led IP40 + honeycomb | 14,3 | 4,4 |
| 3P01.3  | led IP54             | 15,2 | 3,4 |
| 4P01.3  | led IP54 + honeycomb | 15,7 | 3,4 |
| 3P01.3W | led IP40             | 10,7 | 4,4 |
| 4P01.3W | led IP40 + honeycomb | 11,2 | 4,4 |
| 3P01.3W | led IP54             | 11,3 | 3,4 |
| 4P01.3W | led IP54 + honeycomb | 11,8 | 3,4 |

Housing for plasterboard ↻ Ø 6,5cm

- **1Z00.055.01** Single
- **1Z00.055.2L** Double
- **1Z00.055.3L** Triple

Housing for brickwork

- **1M00.055.01**


*(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.*

## Pop 01 NaNo Ø 5,5 (for plasterboard and brickwork)



|      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Available from 30/09/2019



| Pop N01     |                            | P    | P1  |
|-------------|----------------------------|------|-----|
| 3N01.210.□  | GU10                       | 9,5  | 0,7 |
| 3N01.211.□  | GU10 led                   | —    | 0,7 |
| 4N01.211.□  | GU10 led + honeycomb       | —    | 0,7 |
| 3N01.220.□  | GU5.3                      | 7,9  | 0,7 |
| 4N01.220.□  | GU5.3 led + honeycomb      | —    | 0,7 |
| 3N01.2209.□ | GU5.3 IP44                 | 8,8  | 0,7 |
| 4N01.2209.□ | GU5.3 IP44 led + honeycomb | —    | 0,7 |
| 3N01.K■S.□  | led 9,5W IP40              | 10,5 | 0,7 |
| 4N01.K■S.□  | led 9,5W IP40 + honeycomb  | 11,0 | 0,7 |

IP20

220V ÷ 240V

3N01.210.□ GU10 max 50W

3N01.211.□ GU10 led

4N01.211.□ GU10 led

With honeycomb

IP20

12V

3N01.220.□ GU5.3 max 50W

4N01.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP44

12V

3N01.2209.□ GU5.3 max 35W

4N01.2209.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

3N01.K■S.□ dimm IGBT - TRIAC

4N01.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color Nominal lm ▲ Beam spread

2 = 2700 °K 710

3 = 3000 °K 760

24°

Housing for plasterboard Ø 6,5cm

- 1Z00.055.01 Single
- 1Z00.055.2L Double
- 1Z00.055.3L Triple

Housing for brickwork

- 1M00.055.01



|         | Pop NO1              | P   | P1  |
|---------|----------------------|-----|-----|
| 3N01.3  | led IP40             | 7,1 | 0,7 |
| 4N01.3  | led IP40 + honeycomb | 7,6 | 0,7 |
| 3N01.3  | led IP54             | 8,0 | 0,7 |
| 4N01.3  | led IP54 + honeycomb | 8,5 | 0,7 |
| 3N01.3W | led IP40             | 6,9 | 0,7 |
| 4N01.3W | led IP40 + honeycomb | 7,4 | 0,7 |
| 3N01.3W | led IP54             | 7,8 | 0,7 |
| 4N01.3W | led IP54 + honeycomb | 8,3 | 0,7 |

| IP40                  | DimToWarm         | CE | Driver included |
|-----------------------|-------------------|----|-----------------|
| 220V ÷ 240V           | LED 6W CRI 95     |    |                 |
| 3N01.3W               | dimm IGBT - TRIAC |    |                 |
| 4N01.3W               | dimm IGBT - TRIAC |    |                 |
| <i>With honeycomb</i> |                   |    |                 |

| IP54                  | DimToWarm         | CE | Driver included |
|-----------------------|-------------------|----|-----------------|
| 220V ÷ 240V           | LED 6W CRI 95     |    |                 |
| 3N01.3W               | dimm IGBT - TRIAC |    |                 |
| 4N01.3W               | dimm IGBT - TRIAC |    |                 |
| <i>With honeycomb</i> |                   |    |                 |

| Led color                     | Nominal lm               | Beam spread        |
|-------------------------------|--------------------------|--------------------|
| W = max 3000°K<br>min. 1800°K | max 445 lm<br>min. 10 lm | M = 30°<br>S = 18° |


| IP40                  | MC-E=3 | CE | Driver included |
|-----------------------|--------|----|-----------------|
| 250m/A                | LED 8W |    | CRI>90          |
| 3N01.3                |        |    |                 |
| 4N01.3                |        |    |                 |
| <i>With honeycomb</i> |        |    |                 |

| IP54                  | MC-E=3 | CE | Driver included |
|-----------------------|--------|----|-----------------|
| 250m/A                | LED 8W |    | CRI>90          |
| 3N01.3                |        |    |                 |
| 4N01.3                |        |    |                 |
| <i>With honeycomb</i> |        |    |                 |

| Led color                              | Nominal lm        | Beam spread                   |
|--|-------------------|-------------------------------|
| 2 = 2700°K<br>3 = 3000°K<br>4 = 4000°K | 779<br>819<br>855 | M = 38°<br>S = 22°<br>T = 12° |

- Frame
- 02 ● Black
- 06 ○ White
- C1 ● Copper Anodized
- S1 ● Brass Anodized

Available from 30/09/2019



- © (m-M) Driver
- 3KIT.250.1L (1-1) on/off
- 3KIT.251.28 (1-3) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.252.12 (1-1) DALI
- 3KIT.253.13 (1-1) Push - 1...10V
- 3KIT.254.12 (1-1) IGBT - TRIAC
- Emergency unit: (inverter + battery, Driver not included)
- 3KIT.900.01 (1-1) 1:00 hour
- 3KIT.900.03 (1-1) 3:00 hours

Housing for plasterboard ↻ Ø 6,5cm

- 1Z00.055.01 Single
- 1Z00.055.2L Double
- 1Z00.055.3L Triple

Housing for brickwork

- 1M00.055.01


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## easy Pop 01 Ø 5,5 with trim (for plasterboard and brickwork)



|    | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019



|             | Pop E01                    | P    | P1  |
|-------------|----------------------------|------|-----|
| 3E01.210.□  | GU10                       | 13,2 | 4,4 |
| 3E01.211.□  | GU10 led                   | —    | 4,4 |
| 4E01.211.□  | GU10 led + honeycomb       | —    | 4,4 |
| 3E01.220.□  | GU5.3                      | 11,6 | 4,4 |
| 4E01.220.□  | GU5.3 led + honeycomb      | —    | 4,4 |
| 3E01.2209.□ | GU5.3 IP44                 | 13,0 | 3,4 |
| 4E01.2209.□ | GU5.3 IP44 led + honeycomb | —    | 3,4 |
| 3E01.K■S.□  | led 9,5W IP40              | 13,8 | 4,4 |
| 4E01.K■S.□  | led 9,5W IP40 + honeycomb  | 14,3 | 4,4 |

IP20

220V ÷ 240V

3E01.210.□ GU10 max 50W

3E01.211.□ GU10 led

4E01.211.□ GU10 led

With honeycomb

IP20

12V

3E01.220.□ GU5.3 max 50W

4E01.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP44

12V

3E01.2209.□ GU5.3 max 35W

4E01.2209.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

LED 9,5W CRI>90

3E01.K■S.□ dimm IGBT - TRIAC


4E01.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color Nominal lm ▲ Beam spread

2 = 2700 °K 710 24°

3 = 3000 °K 760



Housing for brickwork

- 1E00.055.01



**IP40** © **DimToWarm** **CE** ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3E01.3W** ▽ □ dimm IGBT - TRIAC  
**4E01.3W** ▽ □ dimm IGBT - TRIAC  
*With honeycomb*

**IP54** © **DimToWarm** **CE** ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3E01.3W** ▽ 9 □ dimm IGBT - TRIAC  
**4E01.3W** ▽ 9 □ dimm IGBT - TRIAC  
*With honeycomb*

■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**W** = max 3000°K    max 445 lm    **M** = 30°  
                          min. 1800°K    min. 10 lm    **S** = 18°



**IP40** © **MC-E=3** **CE** ▽ Ⓢ  
 350m/A **LED 11W** CRI>90  
**3E01.3** ▽ □  
**4E01.3** ▽ □  
*With honeycomb*

**IP54** © **MC-E=3** **CE** ▽ Ⓢ  
 350m/A **LED 11W** CRI>90  
**3E01.3** ▽ 9 □  
**4E01.3** ▽ 9 □  
*With honeycomb*

■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**2** = 2700°K    1195    **S** = 22°  
**3** = 3000°K    1257    **T** = 12°  
**4** = 4000°K    1313

- *Frame*
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019



Housing for brickwork

- **1E00.055.01**

|         | Pop E01              | P    | P <sub>1</sub> |
|---------|----------------------|------|----------------|
| 3E01.3  | led IP40             | 13,8 | 4,4            |
| 4E01.3  | led IP40 + honeycomb | 14,3 | 4,4            |
| 3E01.3  | led IP54             | 15,2 | 3,4            |
| 4E01.3  | led IP54 + honeycomb | 15,7 | 3,4            |
| 3E01.3W | led IP40             | 10,7 | 4,4            |
| 4E01.3W | led IP40 + honeycomb | 11,2 | 4,4            |
| 3E01.3W | led IP54             | 11,3 | 3,4            |
| 4E01.3W | led IP54 + honeycomb | 11,8 | 3,4            |

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.




## easy Pop 01 NaNo Ø 5,5 with trim (for plasterboard and brickwork)



| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019



|             | Pop F01                    | P    | P1  |
|-------------|----------------------------|------|-----|
| 3F01.210.□  | GU10                       | 9,5  | 0,7 |
| 3F01.211.□  | GU10 led                   | —    | 0,7 |
| 4F01.211.□  | GU10 led + honeycomb       | —    | 0,7 |
| 3F01.220.□  | GU5.3                      | 7,9  | 0,7 |
| 4F01.220.□  | GU5.3 led + honeycomb      | —    | 0,7 |
| 3F01.2209.□ | GU5.3 IP44                 | 8,8  | 0,7 |
| 4F01.2209.□ | GU5.3 IP44 led + honeycomb | —    | 0,7 |
| 3F01.K■S.□  | led 9,5W IP40              | 10,5 | 0,7 |
| 4F01.K■S.□  | led 9,5W IP40 + honeycomb  | 11,0 | 0,7 |

IP20

220V ÷ 240V

3F01.210.□ GU10 max 50W

3F01.211.□ GU10 led

4F01.211.□ GU10 led

With honeycomb

IP20

12V

3F01.220.□ GU5.3 max 50W

4F01.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP44

12V

3F01.2209.□ GU5.3 max 35W

4F01.2209.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

3F01.K■S.□ dimm IGBT - TRIAC

4F01.K■S.□ dimm IGBT - TRIAC


With honeycomb

■ Led color Nominal lm ▲ Beam spread

2 = 2700 °K 710

24°

3 = 3000 °K 760



Housing for brickwork

● 1E00.055.01



**IP40** © **DimToWarm** CE ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3F01.3W** □ dimm IGBT - TRIAC  
**4F01.3W** □ dimm IGBT - TRIAC  
*With honeycomb*

**IP54** © **DimToWarm** CE ▽ Ⓢ  
 220V ÷ 240V **LED 6W** CRI 95 *Driver included*  
**3F01.3W** □ dimm IGBT - TRIAC  
**4F01.3W** □ dimm IGBT - TRIAC  
*With honeycomb*

■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**W** = max 3000°K    max 445 lm    **M** = 30°  
                          min. 1800°K    min. 10 lm    **S** = 18°


**IP40** © MC-E=3 CE ▽ Ⓢ  
 250m/A **LED 8W** CRI>90  
**3F01.3** □  
**4F01.3** □  
*With honeycomb*

**IP54** © MC-E=3 CE ▽ Ⓢ  
 250m/A **LED 8W** CRI>90  
**3F01.3** □  
**4F01.3** □  
*With honeycomb*


■ *Led color*    *Nominal lm*    ▽ *Beam spread*  
**2** = 2700°K    779    **M** = 38°  
**3** = 3000°K    819    **S** = 22°  
**4** = 4000°K    855    **T** = 12°

- *Frame*
- 02** ● Black
  - 06** ○ White
  - C1** ● Copper Anodized
  - S1** ● Brass Anodized

*Available from 30/09/2019*



- © (m-M) Driver
- 3KIT.250.1L** (1-1) on/off
  - 3KIT.251.28** (1-3) DALI - Push - 1...10V  
*Remote installation*
  - 3KIT.252.12** (1-1) DALI
  - 3KIT.253.13** (1-1) Push - 1...10V
  - 3KIT.254.12** (1-1) IGBT - TRIAC
- Emergency unit: (inverter + battery, Driver not included)
- 3KIT.900.01** (1-1) 1:00 hour
  - 3KIT.900.03** (1-1) 3:00 hours




Housing for brickwork

- **1E00.055.01**

| Pop FO1 |                      | P   | P <sub>1</sub> |
|---------|----------------------|-----|----------------|
| 3F01.3  | led IP40             | 7,1 | 0,7            |
| 4F01.3  | led IP40 + honeycomb | 7,6 | 0,7            |
| 3F01.3  | led IP54             | 8,0 | 0,7            |
| 4F01.3  | led IP54 + honeycomb | 8,5 | 0,7            |
| 3F01.3W | led IP40             | 6,9 | 0,7            |
| 4F01.3W | led IP40 + honeycomb | 7,4 | 0,7            |
| 3F01.3W | led IP54             | 7,8 | 0,7            |
| 4F01.3W | led IP54 + honeycomb | 8,3 | 0,7            |

*(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.*

## Pop 01 small Bulb trimless (for plasterboard and brickwork)



IP20

CE

220V ÷ 240V

e27 led 4W

CRI>80

3P01.A2L.

dimmm IGBT - TRIAC

Led color

Nominal lm


Beam spread

2700 °K

470

360°

## Pop 01 big Bulb trimless (for plasterboard and brickwork)



IP20

CE

220V ÷ 240V

e27 led 4W

CRI>80

3P01.B2L.

dimmm IGBT - TRIAC

Led color

Nominal lm

Beam spread

2700 °K

470

360°

Frame

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019


Housing for plasterboard Ø 6,5cm

- 1Z00.055.01 Single
- 1Z00.055.2L Double
- 1Z00.055.3L Triple

Housing for brickwork


- 1M00.055.01

*easy Pop 01 small Bulb with trim (for plasterboard and brickwork)*



|             |                    |               |   |   |
|-------------|--------------------|---------------|---|---|
| IP20        | Ⓛ                  | CE            | ▽ | □ |
| 220V ÷ 240V | e27 led 4W         | CRI>80        |   |   |
| 3E01.A2L. □ | dimmm IGBT - TRIAC |               |   |   |
| ■ Led color | Nominal lm         | ▲ Beam spread |   |   |
| 2700°K      | 470                | 360°          |   |   |


*easy Pop 01 big Bulb with trim (for plasterboard and brickwork)*



|             |                    |               |   |   |
|-------------|--------------------|---------------|---|---|
| IP20        | Ⓛ                  | CE            | ▽ | □ |
| 220V ÷ 240V | e27 led 4W         | CRI>80        |   |   |
| 3E01.B2L. □ | dimmm IGBT - TRIAC |               |   |   |
| ■ Led color | Nominal lm         | ▲ Beam spread |   |   |
| 2700°K      | 470                | 360°          |   |   |

- Frame
- |    |   |                 |
|----|---|-----------------|
| 02 | ● | Black           |
| 06 | ○ | White           |
| C1 | ● | Copper Anodized |
| S1 | ● | Brass Anodized  |


Available from 30/09/2019



Housing for brickwork

- 1E00.055.01

# Pop 01 Static Ø 12,5 trimless (for plasterboard and brickwork)



IP20



CE



12V

3P01.530.□

G53 max 50W

3KIT.201.050

max 50VA

Dimmable gear: IGBT


□ Frame

02 ● Black

06 ○ White

|            | P   |
|------------|-----|
| 3P01.530.□ | 4,4 |
| 3P01.6■▲□  | 4,0 |
| 3P01.6■▲9□ | 4,2 |

Housing for plasterboard ↻ Ø 14,0cm

- 1Z00.125.01 Single
- 1Z00.125.2L Double
- 1Z00.125.3L Triple 





Housing for brickwork

- 1M00.125.01

IP40  MC-E=3   

350 - 500 - 700 m/A CRI>90

3P01.6 

IP54  MC-E=3   

350 - 500 - 700 m/A CRI>90

3P01.6 

 (m-M) LED 12,5W 350m/A

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

 Led color *Nominal lm*  Beam spread

2 = 2700 °K 1477 L = 60°

3 = 3000 °K 1565 S = 24°

4 = 4000 °K 1635 T = 12°

 (m-M) LED 18,4W 500m/A

3KIT.500.1L (1-1) on/off

3KIT.501.50 (1-3) DALI - Push - 1...10V

3KIT.502.20 (1-1) DALI

3KIT.503.20 (1-1) Push - 1...10V

3KIT.504.20 (1-1) IGBT - TRIAC

 Led color *Nominal lm*  Beam spread

2 = 2700 °K 2020 L = 60°

3 = 3000 °K 2140 S = 24°

4 = 4000 °K 2236 T = 12°

 (m-M) LED 27W 700m/A

3KIT.700.1L (1-1) on/off

3KIT.701.50 (1-1) DALI - Push - 1...10V

 Led color *Nominal lm*  Beam spread

2 = 2700 °K 2683 L = 60°

3 = 3000 °K 2842 S = 24°

4 = 4000 °K 2963 T = 12°

Emergency unit: (inverter + battery. Driver not included)


3KIT.900.01 (1-1) 1:00 hour

3KIT.900.03 (1-1) 3:00 hours

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

*Pop 01 Dynamic Ø 12,5 trimless (for plasterboard and brickwork)*





|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |

Housing for plasterboard Ø 14,0cm

- 1Z00.125.01 Single
- 1Z00.125.2L Double
- 1Z00.125.3L Triple

Housing for brickwork

- 1M00.125.01

IP20

CE

12V

3P01D.530.□ **653** max 50W

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40

MC-E=3

CE

350 - 500 m/A

CRI>90

3P01D.6 .□

© (m-M) **LED 12,5W** 350m/A

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Led color Nominal lm Beam spread

2 = 2700 °K 1477 L = 60°

3 = 3000 °K 1565 S = 24°

4 = 4000 °K 1635 T = 12°

© (m-M) **LED 18,4W** 500m/A

3KIT.500.1L (1-1) on/off

3KIT.501.50 (1-3) DALI - Push - 1...10V

3KIT.502.20 (1-1) DALI

3KIT.503.20 (1-1) Push - 1...10V

3KIT.504.20 (1-1) IGBT - TRIAC

Led color Nominal lm Beam spread

2 = 2700 °K 2020 L = 60°

3 = 3000 °K 2140 S = 24°

4 = 4000 °K 2236 T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## Pop 02 Ø 5,5 trimless (for plasterboard and brickwork)



|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |



| Pop P02    | P   |
|------------|-----|
| 3P02.210.□ | 4,7 |
| 3P02.211.□ | —   |
| 4P02.211.□ | —   |
| 3P02.220.□ | 4,7 |
| 4P02.220.□ | —   |
| 3P02.3■▲.□ | 4,7 |
| 4P02.3■▲.□ | 4,7 |
| 3P02.3W▲.□ | 4,7 |
| 4P02.3W▲.□ | 4,7 |

Housing for plasterboard ⌀ 6,5cm

- 1Z00.055.01 Single
- 1Z00.055.2L Double
- 1Z00.055.3L Triple

Housing for brickwork

- 1M00.055.01 Single

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

|                |      |         |   |
|----------------|------|---------|---|
| IP20           | CE   | ▽       | □ |
| 220V ÷ 240V    |      |         |   |
| 3P02.210.□     | GU10 | max 50W |   |
| 3P02.211.□     | GU10 | led     |   |
| 4P02.211.□     | GU10 | led     |   |
| With honeycomb |      |         |   |

|                     |       |          |   |
|---------------------|-------|----------|---|
| IP20                | CE    | ▽        | ◇ |
| 12V                 |       |          |   |
| 3P02.220.□          | GU5.3 | max 50W  |   |
| 4P02.220.□          | GU5.3 | led      |   |
| With honeycomb      |       |          |   |
| 3KIT.201.050        |       | max 50VA |   |
| Dimmable gear: IGBT |       |          |   |

|                |            |               |   |   |
|----------------|------------|---------------|---|---|
| IP40           | MC-E=3     | CE            | ▽ | ◇ |
| 350m/A         | LED 11W    | CRI>90        |   |   |
| 3P02.3■▲.□     |            |               |   |   |
| 4P02.3■▲.□     |            |               |   |   |
| With honeycomb |            |               |   |   |
| ■ Led color    | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700°K     | 1195       | S = 22°       |   |   |
| 3 = 3000°K     | 1257       | T = 12°       |   |   |
| 4 = 4000°K     | 1313       |               |   |   |

|                   |  |
|-------------------|--|
| © (m-M)           | Driver                                       |
| 3KIT.350.1L (1-1) | on/off                                       |
| 3KIT.351.40 (1-3) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.352.15 (1-1) | DALI   |
| 3KIT.353.15 (1-1) | Push - 1...10V                               |
| 3KIT.354.18 (1-1) | IGBT - TRIAC                                 |

|                |                  |               |   |   |
|----------------|------------------|---------------|---|---|
| IP40           | DimToWarm        | CE            | ▽ | ◇ |
| 220V ÷ 240V    | LED 6W           | CRI 95        |   |   |
| 3P02.3W▲.□     | dim IGBT - TRIAC |               |   |   |
| 4P02.3W▲.□     | dim IGBT - TRIAC |               |   |   |
| With honeycomb |                  |               |   |   |
| ■ Led color    | Nominal lm       | ▲ Beam spread |   |   |
| W= max 3000°K  | max 445 lm       | M = 30°       |   |   |
| min. 1800°K    | min. 10 lm       | S = 18°       |   |   |

## easy Pop 02 Ø 5,5 with trim (for plasterboard and brickwork)




□ Frame

02 ● Black


06 ○ White

Available from 30/09/2019



| easy Pop E02 |                       | P   |
|--------------|-----------------------|-----|
| 3E02.210.□   | GU10                  | 4,7 |
| 3E02.211.□   | GU10 led              | —   |
| 4E02.211.□   | GU10 led + honeycomb  | —   |
| 3E02.220.□   | GU5.3                 | 4,7 |
| 4E02.220.□   | GU5.3 led + honeycomb | —   |
| 3E02.3■▲.□   | led IP40              | 4,7 |
| 4E02.3■▲.□   | led IP40 + honeycomb  | 4,7 |
| 3E02.3W▲.□   | led IP40              | 4,7 |
| 4E02.3W▲.□   | led IP40 + honeycomb  | 4,7 |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



Housing for brickwork

● 1E00.055.01

IP20 ☒ CE ▼ □

220V ÷ 240V

3E02.210.□ GU10 max 50W

3E02.211.□ GU10 led

4E02.211.□ GU10 led

With honeycomb

IP20 ☒ ☒ CE ▼ ◆

12V

3E02.220.□ GU5.3 max 50W

4E02.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 ☒ MC-E=3 CE ▼ ◆

350m/A

LED 11W

CRI>90

3E02.3■▲.□

4E02.3■▲.□

With honeycomb

| Led color  | Nominal lm | ▲ Beam spread |
|------------|------------|---------------|
| 2 = 2700°K | 1195       | S = 22°       |
| 3 = 3000°K | 1257       | T = 12°       |
| 4 = 4000°K | 1313       |               |

☒ (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

IP40 ☒ DimToWarm CE ▼ ◆

220V ÷ 240V

LED 6W

CRI 95



3E02.3W▲.□ dimm IGBT - TRIAC

4E02.3W▲.□ dimm IGBT - TRIAC

With honeycomb

| Led color     | Nominal lm | ▲ Beam spread |
|---------------|------------|---------------|
| W= max 3000°K | max 445 lm | M = 30°       |
| min. 1800°K   | min. 10 lm | S = 18°       |

## Pop 03 $\varnothing 6,0$ trimless (only for plasterboard)



|    | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Finishes C1 and S1 are available from 30/09/2019

IP20

12V

**3P03.200.** **GU4** max 35W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

IP40

350m/A

**3P03.2** **S.**

**LED 11W**

CRI>90

Led color

Nominal lm

Beam spread

2 = 2700 °K

1195

22°

3 = 3000 °K

1257

4 = 4000 °K

1313

© (m-M) Driver

**3KIT.350.1L** (1-1) on/off

**3KIT.350.25** (2-2) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V  
Remote installation

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery, Driver not included)

**3KIT.900.01** (1-1) 1:00 hour

**3KIT.900.03** (1-1) 3:00 hours



Remote installation

Housing for plasterboard  $\varnothing 7,6$ cm

● **1Z00.060.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

## Pop 03 NaNo Ø 6,0 trimless (only for plasterboard)

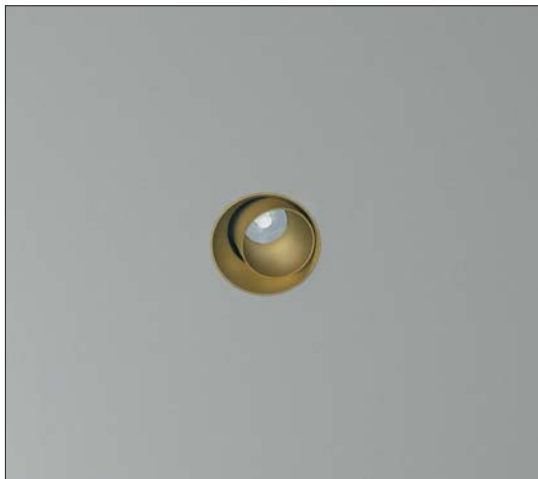

| □    | Frame           |
|------|-----------------|
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Available from 30/09/2019

|                      |            |               |   |   |
|----------------------|------------|---------------|---|---|
| IP40                 | CE         | CE            | ∇ | ⊕ |
| 250m/A               | LED 8W     | CRI>90        |   |   |
| <b>3N03.2</b> ■ S. □ |            |               |   |   |
| ■ Led color          | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700 °K          | 779        | 22°           |   |   |
| 3 = 3000 °K          | 819        |               |   |   |
| 4 = 4000 °K          | 855        |               |   |   |

© (m-M) Driver

**3KIT.250.1L** (1-1) on/off

**3KIT.251.28** (1-3) DALI - Push - 1...10V  
Remote installation

**3KIT.252.12** (1-1) DALI

**3KIT.253.13** (1-1) Push - 1...10V

**3KIT.254.12** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery, Driver not included)

**3KIT.900.01** (1-1) 1:00 hour


**3KIT.900.03** (1-1) 3:00 hours  
Remote installation

Housing for plasterboard  Ø 7,6cm

● **1Z00.060.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop 03 $\varnothing 8,0$ trimless (for plasterboard and brickwork)



|      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Finishes C1 and S1 are available from 30/09/2019

|            | Pop P03                   | P    | P1  |
|------------|---------------------------|------|-----|
| 3P03.210.□ | GU10                      | 11,0 | 2,5 |
| 3P03.211.□ | GU10 led                  | —    | 2,5 |
| 4P03.211.□ | GU10 led + honeycomb      | —    | 2,5 |
| 3P03.220.□ | GU5.3                     | 9,4  | 2,5 |
| 4P03.220.□ | GU5.3 led + honeycomb     | —    | 2,5 |
| 3P03.K■S.□ | led 9,5W IP40             | 11,4 | 2,5 |
| 4P03.K■S.□ | led 9,5W IP40 + honeycomb | 11,9 | 2,5 |

IP20

220V ÷ 240V

3P03.210.□ GU10 max 50W

3P03.211.□ GU10 led

4P03.211.□ GU10 led

With honeycomb

IP20

12V

3P03.220.□ GU5.3 max 50W

4P03.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

3P03.K■S.□ dimm IGBT - TRIAC CRI>90

4P03.K■S.□ dimm IGBT - TRIAC

With honeycomb


| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 710        | 24°           |
| 3 = 3000 °K | 760        |               |

Housing for plasterboard  $\varnothing 9,5\text{cm}$

- 1Z00.080.01 Single
- 1Z00.080.2L Double
- 1Z00.080.3L Triple

Housing for brickwork

- 1M00.080.01



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

|            | Pop P03              | P    | P1  |
|------------|----------------------|------|-----|
| 3P03.3     | M.□                  | 10,5 | 0,5 |
| 3P03.3     | S.□                  | 11,4 | 2,5 |
| 3P03.3     | T.□                  | 9,4  | 0,5 |
| 4P03.3     | M.□                  | 11,0 | 0,5 |
| 4P03.3     | S.□                  | 11,9 | 2,5 |
| 4P03.3     | T.□                  | 9,9  | 0,5 |
| 3P03.3WM.□ | led IP40             | 6,8  | 0,5 |
| 3P03.3WS.□ | led IP40             | 8,8  | 2,5 |
| 3P03.3WT.□ | led IP40             | 6,8  | 0,5 |
| 4P03.3WM.□ | led IP40 + honeycomb | 7,3  | 0,5 |
| 4P03.3WS.□ | led IP40 + honeycomb | 9,3  | 2,5 |
| 4P03.3WT.□ | led IP40 + honeycomb | 7,3  | 0,5 |

| IP40                  | MC-E=3     | CE            | ▽ | ⊕ |
|-----------------------|------------|---------------|---|---|
| 350m/A                | LED 11W    | CRI>90        |   |   |
| 3P03.3                | ■▲□        |               |   |   |
| 4P03.3                | ■▲□        |               |   |   |
| <i>With honeycomb</i> |            |               |   |   |
| ■ Led color           | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700 °K           | 1195       | M = 38°       |   |   |
| 3 = 3000 °K           | 1257       | S = 22°       |   |   |
| 4 = 4000 °K           | 1313       | T = 10°       |   |   |

© (m-M) Driver

- 3KIT.350.1L (1-1) on/off
- 3KIT.351.40 (1-3) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.352.15 (1-1) DALI
- 3KIT.353.15 (1-1) Push - 1...10V
- 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ore
- 3KIT.900.03 (1-1) 3:00 hours/ore

| IP40                  | ©          | DimToWarm         | CE                     | ▽ | ⊕ |
|-----------------------|------------|-------------------|------------------------|---|---|
| 220V ÷ 240V           | LED 6W     | CRI 95            | <i>Driver included</i> |   |   |
| 3P03.3W               | ▲□         | dimm IGBT - TRIAC |                        |   |   |
| 4P03.3W               | ▲□         | dimm IGBT - TRIAC |                        |   |   |
| <i>With honeycomb</i> |            |                   |                        |   |   |
| ■ Led color           | Nominal lm | ▲ Beam spread     |                        |   |   |
| W= max 3000 °K        | max 445 lm | M = 30°           |                        |   |   |
| min. 1800 °K          | min. 10 lm | S = 18°           |                        |   |   |

Housing for plasterboard Ø 9,5cm


- 1Z00.080.01 Single
- 1Z00.080.2L Double
- 1Z00.080.3L Triple

Housing for brickwork

- 1M00.080.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

## Pop 03 NaNo Ø 8,0 trimless (for plasterboard and brickwork)



| Pop NaNo N03 |                           | P    | P1  |
|--------------|---------------------------|------|-----|
| 3N03.210.□   | GU10                      | 9,1  | 0,5 |
| 3N03.211.□   | GU10 led                  | —    | 0,5 |
| 4N03.211.□   | GU10 led + honeycomb      | —    | 0,5 |
| 3N03.220.□   | GU5.3                     | 7,5  | 0,5 |
| 4N03.220.□   | GU5.3 led + honeycomb     | —    | 0,5 |
| 3N03.K■S.□   | led 9,5W IP40             | 10,0 | 0,5 |
| 4N03.K■S.□   | led 9,5W IP40 + honeycomb | 10,5 | 0,5 |

| Frame |                 |
|-------|-----------------|
| 02    | Black           |
| 06    | White           |
| C1    | Copper Anodized |
| S1    | Brass Anodized  |

Finishes C1 and S1 are available from 30/09/2019

IP20

220V ÷ 240V

3N03.210.□ GU10 max 50W

3N03.211.□ GU10 led

4N03.211.□ GU10 led

With honeycomb

IP20

12V

3N03.220.□ GU5.3 max 50W

4N03.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V

3N03.K■S.□ dimm IGBT - TRIAC

4N03.K■S.□ dimm IGBT - TRIAC

With honeycomb


| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 710        | 24°         |
| 3 = 3000 °K | 760        |             |

Housing for plasterboard Ø 9,5cm

- 1Z00.080.01 Single
- 1Z00.080.2L Double
- 1Z00.080.3L Triple

Housing for brickwork

- 1M00.080.01



|      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

Available from 30/09/2019

|        | Pop NaNo N03              | P   | P <sub>1</sub> |
|--------|---------------------------|-----|----------------|
| 3N03.3 | M. □ led IP40             | 7,8 | 0,5            |
| 3N03.3 | S. □ led IP40             | 6,8 | 0,5            |
| 3N03.3 | T. □ led IP40             | 6,8 | 0,5            |
| 4N03.3 | M. □ led IP40 + honeycomb | 8,3 | 0,5            |
| 4N03.3 | S. □ led IP40 + honeycomb | 7,3 | 0,5            |
| 4N03.3 | T. □ led IP40 + honeycomb | 7,3 | 0,5            |

|                       |               |               |
|-----------------------|---------------|---------------|
| IP40                  | MC-E=3        | CE            |
| 250m/A                | <b>LED 8W</b> | CRI>90        |
| 3N03.3                | □             |               |
| 4N03.3                | □             |               |
| <i>With honeycomb</i> |               |               |
| ■ Led color           | Nominal lm    | ▲ Beam spread |
| 2 = 2700 °K           | 779           | M = 38°       |
| 3 = 3000 °K           | 819           | S = 22°       |
| 4 = 4000 °K           | 855           | T = 10°       |

|                   |   |
|-------------------|---|
| © (m-M)           | Driver  |
| 3KIT.250.1L (1-1) | on/off  |
| 3KIT.251.28 (1-3) | DALI - Push - 1...10V<br><i>Remote installation</i> |
| 3KIT.252.12 (1-1) | DALI  |
| 3KIT.253.13 (1-1) | Push - 1...10V                                      |
| 3KIT.254.12 (1-1) | IGBT - TRIAC  |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ore  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |

Housing for plasterboard Ø 9,5cm

|     |             |        |
|-----|-------------|--------|
| ●   | 1Z00.080.01 | Single |
| ●●  | 1Z00.080.2L | Double |
| ●●● | 1Z00.080.3L | Triple |


Housing for brickwork

|   |             |
|---|-------------|
| ● | 1M00.080.01 |
|---|-------------|

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## easy Pop 03 $\varnothing 8,0$ with trim (for plasterboard and brickwork)



|    | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019

| easy Pop E03 |                           | P    | P1  |
|--------------|---------------------------|------|-----|
| 3E03.210.□   | GU10                      | 11,0 | 2,5 |
| 3E03.211.□   | GU10 led                  | —    | 2,5 |
| 4E03.211.□   | GU10 led + honeycomb      | —    | 2,5 |
| 3E03.220.□   | GU5.3                     | 9,4  | 2,5 |
| 4E03.220.□   | GU5.3 led + honeycomb     | —    | 2,5 |
| 3E03.K■S.□   | led 9,5W IP40             | 11,4 | 2,5 |
| 4E03.K■S.□   | led 9,5W IP40 + honeycomb | 11,9 | 2,5 |

IP20

220V ÷ 240V

3E03.210.□ GU10 max 50W

3E03.211.□ GU10 led

4E03.211.□ GU10 led

With honeycomb

IP20

12V

3E03.220.□ GU5.3 max 50W

4E03.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%

220V ÷ 240V


LED 9,5W CRI>90

3E03.K■S.□ dimm IGBT - TRIAC

4E03.K■S.□ dimm IGBT - TRIAC


With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 710        | 24°           |
| 3 = 3000 °K | 760        |               |



Housing for brickwork

● 1E00.080.01



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy Pop E03 |                          | P    | P1  |
|--------------|--------------------------|------|-----|
| 3E03.3       | M.□ led IP40             | 10,5 | 0,5 |
| 3E03.3       | S.□ led IP40             | 11,4 | 2,5 |
| 3E03.3       | T.□ led IP40             | 9,4  | 0,5 |
| 4E03.3       | M.□ led IP40 + honeycomb | 11,0 | 0,5 |
| 4E03.3       | S.□ led IP40 + honeycomb | 11,9 | 2,5 |
| 4E03.3       | T.□ led IP40 + honeycomb | 9,9  | 0,5 |
| 3E03.3WM.□   | led IP40                 | 6,8  | 0,5 |
| 3E03.3WS.□   | led IP40                 | 8,8  | 2,5 |
| 3E03.3WT.□   | led IP40                 | 6,8  | 0,5 |
| 4E03.3WM.□   | led IP40 + honeycomb     | 7,3  | 0,5 |
| 4E03.3WS.□   | led IP40 + honeycomb     | 9,3  | 2,5 |
| 4E03.3WT.□   | led IP40 + honeycomb     | 7,3  | 0,5 |

| IP40           | MC-E=3     | CE            | ▽ | ⊕ |
|----------------|------------|---------------|---|---|
| 350m/A         | LED 11W    | CRI>90        |   |   |
| 3E03.3         | ■▲.□       |               |   |   |
| 4E03.3         | ■▲.□       |               |   |   |
| With honeycomb |            |               |   |   |
| ■ Led color    | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700 °K    | 1195       | M = 38°       |   |   |
| 3 = 3000 °K    | 1257       | S = 22°       |   |   |
| 4 = 4000 °K    | 1313       | T = 10°       |   |   |


© (m-M) Driver

- 3KIT.350.1L (1-1) on/off
- 3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation
- 3KIT.352.15 (1-1) DALI
- 3KIT.353.15 (1-1) Push - 1...10V
- 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery, Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore

| IP40           | DimToWarm  | CE                | ▽               | ⊕ |
|----------------|------------|-------------------|-----------------|---|
| 220V ÷ 240V    | LED 6W     | CRI 95            | Driver included |   |
| 3E03.3W        | ▲.□        | dimm IGBT - TRIAC |                 |   |
| 4E03.3W        | ▲.□        | dimm IGBT - TRIAC |                 |   |
| With honeycomb |            |                   |                 |   |
| ■ Led color    | Nominal lm | ▲ Beam spread     |                 |   |
| W= max 3000 °K | max 445 lm | M = 30°           |                 |   |
| min. 1800 °K   | min. 10 lm | S = 18°           |                 |   |




Housing for brickwork

- 1E00.080.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 03 **NaNo** Ø 8,0 with trim (for plasterboard and brickwork)



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy NaNo Pop F03 |                           | P    | P1  |
|-------------------|---------------------------|------|-----|
| 3F03.210.□        | GU10                      | 9,1  | 0,5 |
| 3F03.211.□        | GU10 led                  | —    | 0,5 |
| 4F03.211.□        | GU10 led + honeycomb      | —    | 0,5 |
| 3F03.220.□        | GU5.3                     | 7,5  | 0,5 |
| 4F03.220.□        | GU5.3 led + honeycomb     | —    | 0,5 |
| 3F03.K■S.□        | led 9,5W IP40             | 10,0 | 0,5 |
| 4F03.K■S.□        | led 9,5W IP40 + honeycomb | 10,5 | 0,5 |

IP20

220V ÷ 240V

3F03.210.□ GU10 max 50W

3F03.211.□ GU10 led

4F03.211.□ GU10 led

With honeycomb

IP20

12V

3F03.220.□ GU5.3 max 50W

4F03.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 Flicker < 20%


220V ÷ 240V

3F03.K■S.□ LED 9,5W CRI>90

4F03.K■S.□ dimm IGBT - TRIAC


With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 710        | 24°           |
| 3 = 3000 °K | 760        |               |



Housing for brickwork

● 1E00.080.01



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy NaNo Pop F03 |                           | P   | P1  |
|-------------------|---------------------------|-----|-----|
| 3F03.3            | M. □ led IP40             | 7,8 | 0,5 |
| 3F03.3            | S. □ led IP40             | 6,8 | 0,5 |
| 3F03.3            | T. □ led IP40             | 6,8 | 0,5 |
| 4F03.3            | M. □ led IP40 + honeycomb | 8,3 | 0,5 |
| 4F03.3            | S. □ led IP40 + honeycomb | 7,3 | 0,5 |
| 4F03.3            | T. □ led IP40 + honeycomb | 7,3 | 0,5 |


| IP40                  | MC-E=3        | CE            | ▽ | ⊕ |
|-----------------------|---------------|---------------|---|---|
| 250m/A                | <b>LED 8W</b> | CRI>90        |   |   |
| 3F03.3                | ■▲. □         |               |   |   |
| 4F03.3                | ■▲. □         |               |   |   |
| <i>With honeycomb</i> |               |               |   |   |
| ■ Led color           | Nominal lm    | ▲ Beam spread |   |   |
| 2 = 2700 °K           | 779           | M = 38°       |   |   |
| 3 = 3000 °K           | 819           | S = 22°       |   |   |
| 4 = 4000 °K           | 855           | T = 10°       |   |   |

© (m-M) Driver

- 3KIT.250.1L (1-1) on/off
- 3KIT.251.28 (1-3) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.252.12 (1-1) DALI
- 3KIT.253.13 (1-1) Push - 1...10V
- 3KIT.254.12 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore




Housing for brickwork

- 1E00.080.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop X3 Ø 10,0 trimless (only for plasterboard)



|            | Pop PX3                   | P    | P1  |
|------------|---------------------------|------|-----|
| 3PX3.210.□ | GU10                      | 10,9 | 2,5 |
| 3PX3.211.□ | GU10 led                  | —    | 2,5 |
| 4PX3.211.□ | GU10 led + honeycomb      | —    | 2,5 |
| 3PX3.K■S.□ | led 9,5W IP40             | 11,4 | 2,5 |
| 4PX3.K■S.□ | led 9,5W IP40 + honeycomb | 11,9 | 2,5 |

| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019

IP20



220V ÷ 240V

3PX3.210.□ GU10 max 50W

3PX3.211.□ GU10 led

4PX3.211.□ GU10 led

With honeycomb

IP40

Flicker < 20%



220V ÷ 240V

LED 9,5W

CRI>90

3PX3.K■S.□ dimm IGBT - TRIAC

4PX3.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

710


24°

3 = 3000 °K

760

Housing for plasterboard

● 1Z00.100.01 ↻ Ø 11,4cm



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

|            | Pop PX3              | P    | P1  |
|------------|----------------------|------|-----|
| 3PX3.3     | M.□                  | 10,5 | 0,5 |
| 3PX3.3     | S.□                  | 11,4 | 2,5 |
| 3PX3.3     | T.□                  | 9,4  | 0,5 |
| 4PX3.3     | M.□                  | 11,0 | 0,5 |
| 4PX3.3     | S.□                  | 11,9 | 2,5 |
| 4PX3.3     | T.□                  | 9,9  | 0,5 |
| 3PX3.3WM.□ | led IP40             | 6,8  | 0,5 |
| 3PX3.3WS.□ | led IP40             | 8,8  | 2,5 |
| 3PX3.3WT.□ | led IP40             | 6,8  | 0,5 |
| 4PX3.3WM.□ | led IP40 + honeycomb | 7,3  | 0,5 |
| 4PX3.3WS.□ | led IP40 + honeycomb | 9,3  | 2,5 |
| 4PX3.3WT.□ | led IP40 + honeycomb | 7,3  | 0,5 |

|                |            |               |
|----------------|------------|---------------|
| IP40           | MC-E=3     | CE            |
| 350m/A         | LED 11W    | CRI>90        |
| 3PX3.3         | ■▲□        |               |
| 4PX3.3         | ■▲□        |               |
| With honeycomb |            |               |
| ■ Led color    | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K    | 1195       | M = 38°       |
| 3 = 3000 °K    | 1257       | S = 22°       |
| 4 = 4000 °K    | 1313       | T = 10°       |

- © (m-M) Driver
- 3KIT.350.1L (1-1) on/off
  - 3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation
  - 3KIT.352.15 (1-1) DALI
  - 3KIT.353.15 (1-1) Push - 1...10V
  - 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore


|                                |                          |                    |
|--------------------------------|--------------------------|--------------------|
| IP40                           | DimToWarm                | CE                 |
| 220V ÷ 240V                    | LED 6W                   | CRI 95             |
| 3PX3.3W                        | ▲□                       | Driver included    |
| 4PX3.3W                        | ▲□                       |                    |
| With honeycomb                 |                          |                    |
| ■ Led color                    | Nominal lm               | ▲ Beam spread      |
| W= max 3000 °K<br>min. 1800 °K | max 445 lm<br>min. 10 lm | M = 30°<br>S = 18° |

Housing for plasterboard

- 1Z00.100.01 ⤷ ⌀ 11,4cm

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop X3 NaNo Ø 10,0 trimless (only for plasterboard)



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

|            | Pop NaNo NX3              | P    | P1  |
|------------|---------------------------|------|-----|
| 3NX3.210.□ | GU10                      | 9,1  | 0,5 |
| 3NX3.211.□ | GU10 led                  | —    | 0,5 |
| 4NX3.211.□ | GU10 led + honeycomb      | —    | 0,5 |
| 3NX3.K■S.□ | led 9,5W IP40             | 10,0 | 0,5 |
| 4NX3.K■S.□ | led 9,5W IP40 + honeycomb | 10,5 | 0,5 |

IP20 ☒

CE ▼ □

220V ÷ 240V

3NX3.210.□ GU10 max 50W

3NX3.211.□ GU10 led

4NX3.211.□ GU10 led

With honeycomb

IP40

Flicker < 20%

CE ▼ □

220V ÷ 240V

LED 9,5W

CRI>90

3NX3.K■S.□ dimm IGBT - TRIAC

4NX3.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

710

24°


3 = 3000 °K

760

Housing for plasterboard

● 1Z00.100.01

↻ Ø 11,4cm



|               | Pop NaNo NX3         | P   | P <sub>1</sub> |
|---------------|----------------------|-----|----------------|
| 3NX3.3 ■ M. □ | led IP40             | 7,8 | 0,5            |
| 3NX3.3 ■ S. □ | led IP40             | 6,8 | 0,5            |
| 3NX3.3 ■ T. □ | led IP40             | 6,8 | 0,5            |
| 4NX3.3 ■ M. □ | led IP40 + honeycomb | 8,3 | 0,5            |
| 4NX3.3 ■ S. □ | led IP40 + honeycomb | 7,3 | 0,5            |
| 4NX3.3 ■ T. □ | led IP40 + honeycomb | 7,3 | 0,5            |

| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019

IP40 MC-E=3

250m/A **LED 8W** CRI>90

3NX3.3 ■ ▲. □

4NX3.3 ■ ▲. □

With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 779        | M = 38°       |
| 3 = 3000 °K | 819        | S = 22°       |
| 4 = 4000 °K | 855        | T = 10°       |

© (m-M) Driver

**3KIT.250.1L** (1-1) on/off

**3KIT.251.28** (1-3) DALI - Push - 1...10V  
Remote installation

**3KIT.252.12** (1-1) DALI

**3KIT.253.13** (1-1) Push - 1...10V

**3KIT.254.12** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore


Housing for plasterboard

● **1Z00.100.01** Ø 11,4cm

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



easy Pop X3  $\varnothing 10,0$  with trim (for plasterboard and brickwork)



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy Pop EX3 |                           | P    | P1  |
|--------------|---------------------------|------|-----|
| 3EX3.210.□   | GU10                      | 10,9 | 2,5 |
| 3EX3.211.□   | GU10 led                  | —    | 2,5 |
| 4EX3.211.□   | GU10 led + honeycomb      | —    | 2,5 |
| 3EX3.K■S.□   | led 9,5W IP40             | 11,4 | 2,5 |
| 4EX3.K■S.□   | led 9,5W IP40 + honeycomb | 11,9 | 2,5 |

IP20



220V ÷ 240V

3EX3.210.□ GU10 max 50W

3EX3.211.□ GU10 led

4EX3.211.□ GU10 led

With honeycomb

IP40

Flicker < 20%



220V ÷ 240V

LED 9,5W

CRI>90

3EX3.K■S.□ dimm IGBT - TRIAC

4EX3.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color

Nominal lm

▲ Beam spread


2 = 2700 °K

710

24°


3 = 3000 °K

760



Housing for brickwork

● 1E00.100.01



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy Pop EX3 |                            | P    | P1  |
|--------------|----------------------------|------|-----|
| 3EX3.3       | M. □ led IP40              | 10,5 | 0,5 |
| 3EX3.3       | S. □ led IP40              | 11,4 | 2,5 |
| 3EX3.3       | T. □ led IP40              | 9,4  | 0,5 |
| 4EX3.3       | M. □ led IP40 + honeycomb  | 11,0 | 0,5 |
| 4EX3.3       | S. □ led IP40 + honeycomb  | 11,9 | 2,5 |
| 4EX3.3       | T. □ led IP40 + honeycomb  | 9,9  | 0,5 |
| 3EX3.3       | WM. □ led IP40             | 6,8  | 0,5 |
| 3EX3.3       | WS. □ led IP40             | 8,8  | 2,5 |
| 3EX3.3       | WT. □ led IP40             | 6,8  | 0,5 |
| 4EX3.3       | WM. □ led IP40 + honeycomb | 7,3  | 0,5 |
| 4EX3.3       | WS. □ led IP40 + honeycomb | 9,3  | 2,5 |
| 4EX3.3       | WT. □ led IP40 + honeycomb | 7,3  | 0,5 |

| IP40           | MC-E=3     | CE            | ▽ | ⊕ |
|----------------|------------|---------------|---|---|
| 350m/A         | LED 11W    | CRI>90        |   |   |
| 3EX3.3         | □          |               |   |   |
| 4EX3.3         | □          |               |   |   |
| With honeycomb |            |               |   |   |
| ■ Led color    | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700 °K    | 1195       | M = 38°       |   |   |
| 3 = 3000 °K    | 1257       | S = 22°       |   |   |
| 4 = 4000 °K    | 1313       | T = 10°       |   |   |


© (m-M) Driver

- 3KIT.350.1L (1-1) on/off
- 3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation
- 3KIT.352.15 (1-1) DALI
- 3KIT.353.15 (1-1) Push - 1...10V
- 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore

| IP40           | DimToWarm              | CE                     | ▽ | ⊕ |
|----------------|------------------------|------------------------|---|---|
| 220V ÷ 240V    | LED 6W                 | CRI 95 Driver included |   |   |
| 3EX3.3         | W. □ dimm IGBT - TRIAC |                        |   |   |
| 4EX3.3         | W. □ dimm IGBT - TRIAC |                        |   |   |
| With honeycomb |                        |                        |   |   |
| ■ Led color    | Nominal lm             | ▲ Beam spread          |   |   |
| W= max 3000 °K | max 445 lm             | M = 30°                |   |   |
| min. 1800 °K   | min. 10 lm             | S = 18°                |   |   |




Housing for brickwork

- 1E00.100.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

easy Pop X3 **NaNo** Ø 10,0 with trim (for plasterboard and brickwork)



- Frame
- 02 ● Black
- 06 ○ White
- C1 ● Copper Anodized
- S1 ● Brass Anodized

Available from 30/09/2019

|            | easy NaNo Pop FX3         | P    | P1  |
|------------|---------------------------|------|-----|
| 3FX3.210.□ | GU10                      | 9,1  | 0,5 |
| 3FX3.211.□ | GU10 led                  | —    | 0,5 |
| 4FX3.211.□ | GU10 led + honeycomb      | —    | 0,5 |
| 3FX3.K■S.□ | led 9,5W IP40             | 10,0 | 0,5 |
| 4FX3.K■S.□ | led 9,5W IP40 + honeycomb | 10,5 | 0,5 |

IP20



220V ÷ 240V

3FX3.210.□ GU10 max 50W

3FX3.211.□ GU10 led

4FX3.211.□ GU10 led

With honeycomb

IP40

Flicker < 20%



220V ÷ 240V

LED 9,5W

CRI>90

3FX3.K■S.□ dimm IGBT - TRIAC

4FX3.K■S.□ dimm IGBT - TRIAC

With honeycomb

■ Led color

Nominal lm

▲ Beam spread


2 = 2700 °K

710

24°


3 = 3000 °K

760



Housing for brickwork

● 1E00.100.01



- Frame
- 02 ● Black
  - 06 ○ White
  - C1 ● Copper Anodized
  - S1 ● Brass Anodized

Available from 30/09/2019

| easy NaNo Pop FX3 |      | P   | P1  |
|-------------------|------|-----|-----|
| 3FX3.3            | M. □ | 7,8 | 0,5 |
| 3FX3.3            | S. □ | 6,8 | 0,5 |
| 3FX3.3            | T. □ | 6,8 | 0,5 |
| 4FX3.3            | M. □ | 8,3 | 0,5 |
| 4FX3.3            | S. □ | 7,3 | 0,5 |
| 4FX3.3            | T. □ | 7,3 | 0,5 |

IP40 © MC-E=3 CE V

250m/A LED 8W CRI>90

3FX3.3

4FX3.3

With honeycomb

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 779        | M = 38°     |
| 3 = 3000 °K | 819        | S = 22°     |
| 4 = 4000 °K | 855        | T = 10°     |

© (m-M) Driver

3KIT.250.1L (1-1) on/off

3KIT.251.28 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.252.12 (1-1) DALI


3KIT.253.13 (1-1) Push - 1...10V

3KIT.254.12 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore





Housing for brickwork

● 1E00.100.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop Y3 $\varnothing 10,0$ trimless (only for plasterboard)

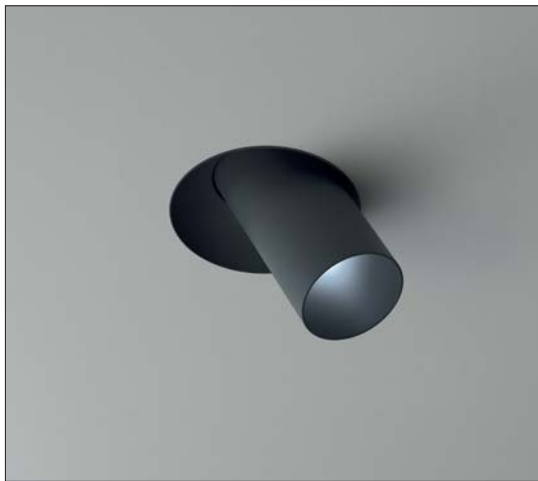

|                          |                 |
|--------------------------|-----------------|
| <input type="checkbox"/> | Frame           |
| <b>02</b>                | Black           |
| <b>06</b>                | White           |
| <b>C1</b>                | Copper Anodized |
| <b>S1</b>                | Brass Anodized  |

Available from 30/09/2019

|             | Pop PY3              | P   |
|-------------|----------------------|-----|
| 3PY3.210.□  | GU10                 | 9,1 |
| 3PY3.211.□  | GU10 led             | —   |
| 4PY3.211.□  | GU10 led + honeycomb | —   |
| 3PY3.3   □  | led IP40             | 9,4 |
| 4PY3.3   □  | led IP40 + honeycomb | 9,9 |
| 3PY3.3W   □ | led IP40             | 6,1 |
| 4PY3.3W   □ | led IP40 + honeycomb | 6,6 |

IP20

220V ÷ 240V

3PY3.210.□ GU10 max 50W

3PY3.211.□ GU10 led

4PY3.211.□ GU10 led

With honeycomb

IP40 MC-E=3

350m/A

3PY3.3 S.□

4PY3.3 S.□

With honeycomb

|   | Led color | Nominal lm |     | Beam spread |
|---|-----------|------------|-----|-------------|
| 2 | 2700 °K   | 1195       | 20° |             |
| 3 | 3000 °K   | 1257       |     |             |
| 4 | 4000 °K   | 1313       |     |             |

(m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

IP40 DimToWarm

220V ÷ 240V

3PY3.3WS.□ LED 6W CRI 95

4PY3.3WS.□ dimm IGBT - TRIAC

With honeycomb



|        | Led color | Nominal lm |     | Beam spread |
|--------|-----------|------------|-----|-------------|
| W= max | 3000°K    | max 445 lm | 20° |             |
| min.   | 1800°K    | min. 10 lm |     |             |

Housing for plasterboard

● 1Z00.100.01  $\varnothing 11,4\text{cm}$

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Qty srl.

## Pop Y3 NaNo Ø 10,0 trimless (only for plasterboard)

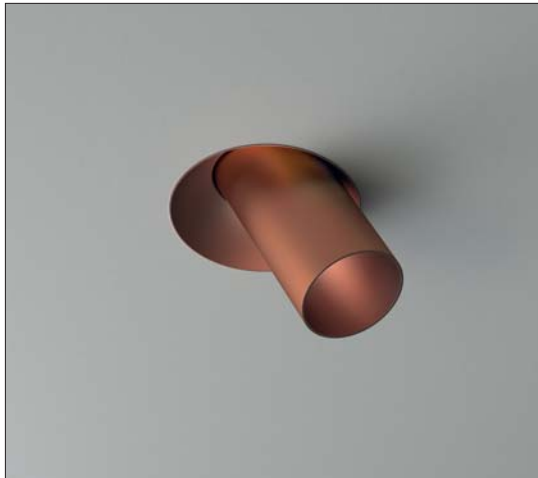

| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019

| Pop NY3                           | P   |
|-----------------------------------|-----|
| 3NY3.3 ■ ▲ □ led IP40             | 6,8 |
| 4NY3.3 ■ ▲ □ led IP40 + honeycomb | 7,3 |

|                |            |               |
|----------------|------------|---------------|
| IP40           | MC-E=3     | CE            |
| 250m/A         | LED 8W     | CRI>90        |
| 3NY3.3 ■ S. □  |            |               |
| 4NY3.3 ■ S. □  |            |               |
| With honeycomb |            |               |
| ■ Led color    | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K    | 779        | 20°           |
| 3 = 3000 °K    | 819        |               |
| 4 = 4000 °K    | 855        |               |

|                   |  |
|-------------------|--|
| © (m-M)           | Driver                                       |
| 3KIT.250.1L (1-1) | on/off                                       |
| 3KIT.251.28 (1-3) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.252.12 (1-1) | DALI   |
| 3KIT.253.13 (1-1) | Push - 1...10V                               |
| 3KIT.254.12 (1-1) | IGBT - TRIAC                                 |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ore  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |

Housing for plasterboard

- 1Z00.100.01 Ø 11,4cm

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## easy Pop Y3 Ø 10,0 with trim (for plasterboard and brickwork)




| easy Pop EY3 |                      | P   |
|--------------|----------------------|-----|
| 3EY3.210.□   | GU10                 | 9,1 |
| 3EY3.211.□   | GU10 led             | —   |
| 4EY3.211.□   | GU10 led + honeycomb | —   |
| 3EY3.3.■▲.□  | led IP40             | 9,4 |
| 4EY3.3.■▲.□  | led IP40 + honeycomb | 9,9 |
| 3EY3.3W▲.□   | led IP40             | 6,1 |
| 4EY3.3W▲.□   | led IP40 + honeycomb | 6,6 |

| IP40           | DimToWarm         | CE              | ▽ | ◇ |
|----------------|-------------------|-----------------|---|---|
| 220V ÷ 240V    | LED 6W CRI 95     | Driver included |   |   |
| 3EY3.3WS.□     | dimm IGBT - TRIAC |                 |   |   |
| 4EY3.3WS.□     | dimm IGBT - TRIAC |                 |   |   |
| With honeycomb |                   |                 |   |   |

| Led color                     | Nominal lm               | Beam spread |
|-------------------------------|--------------------------|-------------|
| W = max 3000°K<br>min. 1800°K | max 445 lm<br>min. 10 lm | 20°         |

| □  | Frame           |
|----|-----------------|
| 02 | Black           |
| 06 | White           |
| C1 | Copper Anodized |
| S1 | Brass Anodized  |

Available from 30/09/2019



IP20 CE ▽ □

|                |              |
|----------------|--------------|
| 220V ÷ 240V    |              |
| 3EY3.210.□     | GU10 max 50W |
| 3EY3.211.□     | GU10 led     |
| 4EY3.211.□     | GU10 led     |
| With honeycomb |              |

| IP40           | MC-E=3  | CE     | ▽ | ◇ |
|----------------|---------|--------|---|---|
| 350m/A         | LED 11W | CRI>90 |   |   |
| 3EY3.3.■ S.□   |         |        |   |   |
| 4EY3.3.■ S.□   |         |        |   |   |
| With honeycomb |         |        |   |   |


| Led color                              | Nominal lm           | Beam spread |
|--|----------------------|-------------|
| 2 = 2700°K<br>3 = 3000°K<br>4 = 4000°K | 1195<br>1257<br>1313 | 20°         |

© (m-M) Driver

|                   |  |
|-------------------|--|
| 3KIT.350.1L (1-1) | on/off                                       |
| 3KIT.351.40 (1-3) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.352.15 (1-1) | DALI   |
| 3KIT.353.15 (1-1) | Push - 1...10V                               |
| 3KIT.354.18 (1-1) | IGBT - TRIAC                                 |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ora  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |



Housing for brickwork

● 1E00.100.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Qty srl.


## easy Pop Y3 NaNo Ø 10,0 with trim (for plasterboard and brickwork)



| easy Pop NaNo FY3 |                      | P   |
|-------------------|----------------------|-----|
| 3FY3.3            | led IP40             | 6,8 |
| 4FY3.3            | led IP40 + honeycomb | 7,3 |

| Frame                |
|----------------------|
| 02 ● Black           |
| 06 ○ White           |
| C1 ● Copper Anodized |
| S1 ● Brass Anodized  |

Available from 30/09/2019




|                       |            |               |
|-----------------------|------------|---------------|
| IP40                  | MC-E=3     | CE            |
| 250m/A                | LED 8W     | CRI>90        |
| 3FY3.3                | ■ S. □     |               |
| 4FY3.3                | ■ S. □     |               |
| <i>With honeycomb</i> |            |               |
| ■ Led color           | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K           | 779        | 20°           |
| 3 = 3000 °K           | 879        |               |
| 4 = 4000 °K           | 855        |               |

© (m-M) Driver

|                   |  |
|-------------------|--|
| 3KIT.250.1L (1-1) | on/off                                       |
| 3KIT.251.28 (1-3) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.252.12 (1-1) | DALI   |
| 3KIT.253.13 (1-1) | Push - 1...10V                               |
| 3KIT.254.12 (1-1) | IGBT - TRIAC                                 |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ora  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |




Housing for brickwork

● 1E00.100.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## Pop Y3 Ø 10,0 trimless, Glass (only for plasterboard)



|     | Frame           | Glass       |
|-----|-----------------|-------------|
| 02F | Black           | Fumé        |
| 06T | White           | Transparent |
| C1F | Copper Anodized | Fumé        |
| S1C | Brass Anodized  | Champagne   |

Available from 30/09/2019

|            | Pop PY3               | P    |
|------------|-----------------------|------|
| 3PY3.210.□ | GU10                  | 12,0 |
| 3PY3.211.□ | GU10 led              | —    |
| 4PY3.211.□ | GU10 led + honeycomb  | —    |
| 3PY3.220.□ | GU5.3                 | 10,4 |
| 4PY3.220.□ | GU5.3 led + honeycomb | —    |
| 3PY3.3.□   | led IP40              | 12,6 |
| 4PY3.3.□   | led IP40 + honeycomb  | 13,1 |
| 3PY3.3W.□  | led IP40              | 6,1  |
| 4PY3.3W.□  | led IP40 + honeycomb  | 6,6  |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Qty srl.

IP20

220V ÷ 240V

3PY3.211.□ **GU10** led ONLY

4PY3.211.□ **GU10** led ONLY

With honeycomb

IP40

350m/A

3PY3.3.□

4PY3.3.□

With honeycomb

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1195       | S = 22°     |
| 3 = 3000 °K | 1257       | T = 12°     |
| 4 = 4000 °K | 1313       |             |

(m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

IP40

220V ÷ 240V

3PY3.3W.□ **LED 6W** CRI 95

4PY3.3W.□ dimm IGBT - TRIAC


With honeycomb

| Led color                    | Nominal lm               | Beam spread        |
|------------------------------|--------------------------|--------------------|
| W= max 3000°K<br>min. 1800°K | max 445 lm<br>min. 10 lm | M = 30°<br>S = 18° |

Housing for plasterboard

● 1Z00.100.01 Ø 11,4cm

## Pop Y3 NaNo Ø 10,0 trimless, Glass (only for plasterboard)



|        | Pop NaNo NY3         | P    |
|--------|----------------------|------|
| 3NY3.3 | led IP40             | 9,7  |
| 4NY3.3 | led IP40 + honeycomb | 10,2 |

|     | Frame           | Glass       |
|-----|-----------------|-------------|
| 02F | Black           | Fumé        |
| 06T | White           | Transparent |
| C1F | Copper Anodized | Fumé        |
| S1C | Brass Anodized  | Champagne   |

Available from 30/09/2019

|                |            |               |
|----------------|------------|---------------|
| IP40           | MC-E=3     | CE            |
| 250m/A         | LED 8W     | CRI>90        |
| 3NY3.3         |            |               |
| 4NY3.3         |            |               |
| With honeycomb |            |               |
| ■ Led color    | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K    | 779        | S = 22°       |
| 3 = 3000 °K    | 879        | T = 12°       |
| 4 = 4000 °K    | 855        |               |

|                   |  |
|-------------------|--|
| © (m-M)           | Driver                                       |
| 3KIT.250.1L (1-1) | on/off                                       |
| 3KIT.251.28 (1-3) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.252.12 (1-1) | DALI   |
| 3KIT.253.13 (1-1) | Push - 1...10V                               |
| 3KIT.254.12 (1-1) | IGBT - TRIAC                                 |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ora  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |

Housing for plasterboard

- 1Z00.100.01 Ø 11,4cm

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## easy Pop Y3 Ø 10,0 with trim, Glass (for plasterboard and brickwork)



| easy Pop Y3 |                      | P   |
|-------------|----------------------|-----|
| 3EY3.210.□  | GU10                 | 9,1 |
| 3EY3.211.□  | GU10 led             | —   |
| 4EY3.211.□  | GU10 led + honeycomb | —   |
| 3EY3.3■▲.□  | led IP40             | 9,4 |
| 4EY3.3■▲.□  | led IP40 + honeycomb | 9,9 |
| 3EY3.3W▲.□  | led IP40             | 6,1 |
| 4EY3.3W▲.□  | led IP40 + honeycomb | 6,6 |

| IP40           | DimToWarm         | CE             | ▽ | ⊕ |
|----------------|-------------------|----------------|---|---|
| 220V ÷ 240V    | LED 6W CRI 95     | Driver incluso |   |   |
| 3EY3.3W▲.□     | dimm IGBT - TRIAC |                |   |   |
| 4EY3.3W▲.□     | dimm IGBT - TRIAC | 0              |   |   |
| With honeycomb |                   |                |   |   |
| ■ Led color    | Nominal lm        | ▲ Beam spread  |   |   |
| W = max 3000°K | max 445 lm        | M = 30°        |   |   |
| min. 1800°K    | min. 10 lm        | S = 18°        |   |   |



| IP20           | CE            | ▽ | ⊕ |
|----------------|---------------|---|---|
| 220V ÷ 240V    |               |   |   |
| 3EY3.211.□     | GU10 led ONLY |   |   |
| 4EY3.211.□     | GU10 led ONLY |   |   |
| With honeycomb |               |   |   |

| IP40           | MC-E=3     | CE            | ▽ | ⊕ |
|----------------|------------|---------------|---|---|
| 350m/A         | LED 11W    | CRI>90        |   |   |
| 3EY3.3■▲.□     |            |               |   |   |
| 4EY3.3■▲.□     |            |               |   |   |
| With honeycomb |            |               |   |   |
| ■ Led color    | Nominal lm | ▲ Beam spread |   |   |
| 2 = 2700°K     | 1195       | S = 22°       |   |   |
| 3 = 3000°K     | 1257       | T = 12°       |   |   |
| 4 = 4000°K     | 1313       |               |   |   |

| © (m-M)   | Driver                                       |
|---|--|
| 3KIT.350.1L (1-1)   | on/off                                       |
| 3KIT.351.40 (1-3)   | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.352.15 (1-1)   | DALI   |
| 3KIT.353.15 (1-1)   | Push - 1...10V                               |
| 3KIT.354.18 (1-1)   | IGBT - TRIAC                                 |
| Emergency unit: (inverter + battery. Driver not included) |  |
| 3KIT.900.01 (1-1)   | 1:00 hour/ora                                |
| 3KIT.900.03 (1-1)   | 3:00 hours/ore                               |

| □   | Frame           | Glass         |
|-----|-----------------|---------------|
| 02F | Black           | ● Fumé        |
| 06T | White           | ● Transparent |
| C1F | Copper Anodized | ● Fumé        |
| S1C | Brass Anodized  | ● Champagne   |

Available from 30/09/2019



Housing for brickwork

● 1E00.100.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Qty srl.


# easy Pop Y3 NaNo Ø 10,0 with trim, Glass (for plasterboard and brickwork)



| easy Pop NaNo FY3 |                      | P    |
|-------------------|----------------------|------|
| 3FY3.3            | led IP40             | 9,7  |
| 4FY3.3            | led IP40 + honeycomb | 10,2 |


|     | Frame           | Glass       |
|-----|-----------------|-------------|
| 02F | Black           | Fumé        |
| 06T | White           | Transparent |
| C1F | Copper Anodized | Fumé        |
| S1C | Brass Anodized  | Champagne   |

Available from 30/09/2019

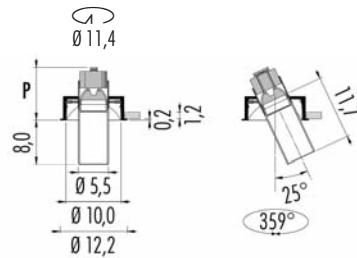

|                |            |               |
|----------------|------------|---------------|
| IP40           | MC-E=3     | CE            |
| 250m/A         | LED 8W     | CRI>90        |
| 3FY3.3         |            |               |
| 4FY3.3         |            |               |
| With honeycomb |            |               |
| ■ Led color    | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K    | 779        | S = 22°       |
| 3 = 3000 °K    | 879        | T = 12°       |
| 4 = 4000 °K    | 855        |               |

|   |  |
|---|--|
| © (m-M)   | Driver                                       |
| 3KIT.250.1L (1-1)   | on/off                                       |
| 3KIT.251.28 (1-3)   | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.252.12 (1-1)   | DALI   |
| 3KIT.253.13 (1-1)   | Push - 1...10V                               |
| 3KIT.254.12 (1-1)   | IGBT - TRIAC                                 |
| Emergency unit: (inverter + battery. Driver not included) |  |
| 3KIT.900.01 (1-1)   | 1:00 hour/ora                                |
| 3KIT.900.03 (1-1)   | 3:00 hours/ore                               |





Housing for brickwork

● 1E00.100.01


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop Z3 Ø 10,0 trimless (only for plasterboard)

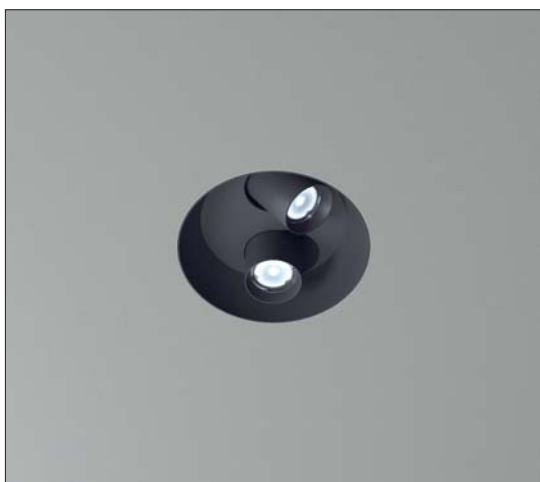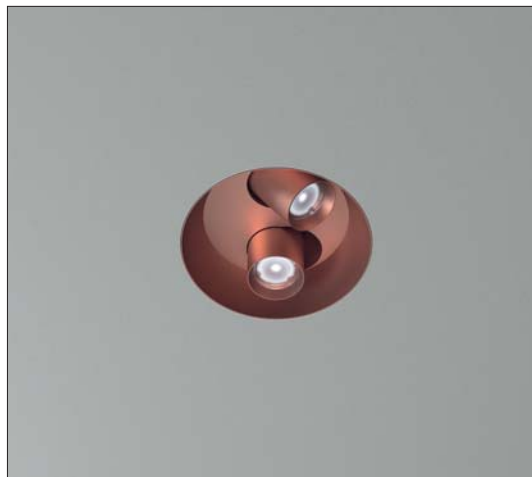

- *Frame*
- 
- 02 ● Black  
06 ○ White  
C1 ● Copper Anodized  
S1 ● Brass Anodized

*Available from 30/09/2019*



|             |            |               |
|-------------|------------|---------------|
| IP40        | MC-E=3     | CE            |
| 500lm/A     | LED 2x6W   | CRI>90        |
| 3PZ3.2      | M.         |               |
| ■ Led color | Nominal lm | ▲ Beam spread |
| 2 = 2700 °K | 2x528      | 25°           |
| 3 = 3000 °K | 2x552      |               |

© (to order) Driver

- 3KIT.500.15 (n° 2) on/off
- 3KIT.501.50 (n° 1) DALI - Push - 1...10V
- 3KIT.502.20 (n° 1) DALI
- 3KIT.503.20 (n° 1) Push - 1...10
- 3KIT.504.10 (n° 2) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore

Housing for plasterboard

- 1Z00.100.01 Ø 11,4cm


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

*easy Pop Z3* Ø 10,0 with trim (for plasterboard and brickwork)



- |      |                 |
|------|-----------------|
| □    | Frame           |
| 02 ● | Black           |
| 06 ○ | White           |
| C1 ● | Copper Anodized |
| S1 ● | Brass Anodized  |

*Available from 30/09/2019*

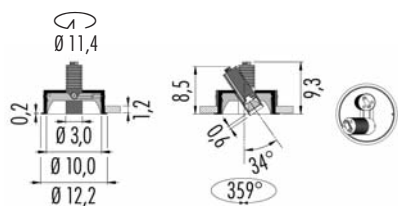


|               |            |               |
|---------------|------------|---------------|
| IP40          | MC-E=3     | CE            |
| 500lm/A       | LED 2x6W   | CRI>90        |
| <b>3EZ3.2</b> | M.         |               |
| ■ Led color   | Nominal lm | ▲ Beam spread |
| 2 = 2700°K    | 2x528      | 25°           |
| 3 = 3000°K    | 2x552      |               |

© (to order) Driver

- 3KIT.500.15** (n° 2) on/off
- 3KIT.501.50** (n° 1) DALI - Push - 1...10V
- 3KIT.502.20** (n° 1) DALI
- 3KIT.503.20** (n° 1) Push - 1...10
- 3KIT.504.10** (n° 2) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01** (1-1) 1:00 hour/ora
- 3KIT.900.03** (1-1) 3:00 hours/ore



Housing for brickwork

- **1E00.100.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



Pop 03  $\varnothing$  17,0 trimless (for plasterboard and brickwork)



□ Frame

02 ● Black

06 ○ White

IP20 

CE   


12V

3P03.530.□ 653 max 50W

3KIT.201.050 max 50VA


Dimmable gear: IGBT

Housing for plasterboard   $\varnothing$  19,0 cm

- 1Z00.170.01 Single
- 1Z00.170.2L Double
- 1Z00.170.3L Triple 

Housing for brickwork

- 1M00.170.01

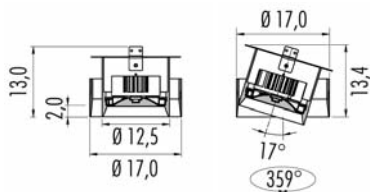

IP20 MC-E=3

350 - 500 - 700 m/A CRI>90

**3P03.6**

© (m-M) **LED 12,5W** 350m/A

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

*Led color* *Nominal lm* *Beam spread*

**2** = 2700 °K 1477 L = 60°

**3** = 3000 °K 1565 S = 24°

**4** = 4000 °K 1635 T = 12°

© (m-M) **LED 18,4W** 500m/A

**3KIT.500.1L** (1-1) on/off

**3KIT.501.50** (1-3) DALI - Push - 1...10V

**3KIT.502.20** (1-1) DALI

**3KIT.503.20** (1-1) Push - 1...10V

**3KIT.504.20** (1-1) IGBT - TRIAC

*Led color* *Nominal lm* *Beam spread*

**2** = 2700 °K 2020 L = 60°

**3** = 3000 °K 2140 S = 24°

**4** = 4000 °K 2236 T = 12°

© (m-M) **LED 27W** 700m/A

**3KIT.700.1L** (1-1) on/off

**3KIT.701.50** (1-1) DALI - Push - 1...10V

*Led color* *Nominal lm* *Beam spread*

**2** = 2700 °K 2683 L = 60°

**3** = 3000 °K 2842 S = 24°

**4** = 4000 °K 2963 T = 12°

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


## Pop 03 Static Ø 17,0 trimless (for plasterboard and brickwork)



Frame

02  Black

06  White



|   |         |        |
|---|---------|--------|
| IP40  | MC-E=3  | CE     |
| 700m/A  | LED 26W | CRI>90 |
| <b>3P03S.6</b> <input type="checkbox"/> L. <input type="checkbox"/> |         |        |

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 3374       | 80°         |
| 3 = 3000 °K | 3533       |             |
| 4 = 4000 °K | 3649       |             |

© (m-M) Driver 700m/A

**3KIT.700.1L** (1-1) on/off

**3KIT.701.50** (1-1) DALI - Push - 1...10V

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

Housing for plasterboard Ø 19,0 cm


● **1Z00.170.01** Single



Housing for brickwork





● **1M00.170.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop 03 Wall Wash Ø 17,0 cm



|  |       |
|--|-------|
| <input type="checkbox"/>   | Frame |
| 02  | Black |
| 06  | White |

IP40  MC-E=3   

700m/A **LED 26W** CRI>90

**3P03S.6**  **W.**

|  Led color | Nominal lm |  Beam spread |
|---|------------|---|
| <b>2</b> = 2700 °K  | 3374       | <b>W</b> = wall wash  |
| <b>3</b> = 3000 °K  | 3533       |   |
| <b>4</b> = 4000 °K  | 3649       |   |

© (m-M) Driver 700m/A

**3KIT.700.1L** (1-1) on/off

**3KIT.701.50** (1-1) DALI - Push - 1...10V

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

Housing for plasterboard  Ø 19,0 cm

- **1Z00.170.01** Single

Housing for brickwork

- **1M00.170.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


Pop 03 Look Ø 17,0 trimless (only for plasterboard)



- *Frame*

---

- 02 ● Black
- 06 ○ White

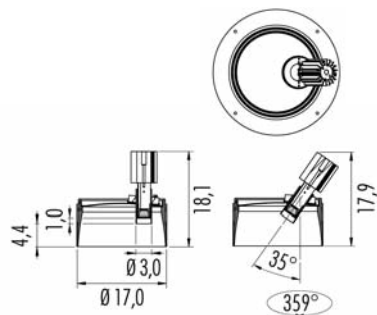


### Look x1

|                |             |        |
|----------------|-------------|--------|
| IP40           | MC-E=3      | CE     |
| 350m/A         | LED 1x13,4W | CRI>90 |
| 3PL31.2 M.     |             |        |
| 4PL31.2 M.     |             |        |
| With honeycomb |             |        |

| Led color  | Nominal lm | Beam spread |
|------------|------------|-------------|
| 2 = 2700°K | 1650       | 37°         |
| 3 = 3000°K | 1727       |             |
| 4 = 4000°K | 1786       |             |

© Driver

- 3KIT.350.1L (n° 1) on/off
- 3KIT.352.15 (n° 1) DALI
- 3KIT.353.15 (n° 1) Push - 1...10V
- 3KIT.354.18 (n° 1) IGBT - TRIAC

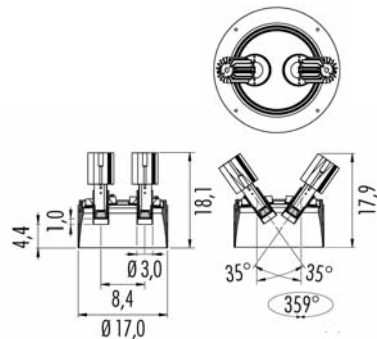


### Look x2

|                |             |        |
|----------------|-------------|--------|
| IP40           | MC-E=3      | CE     |
| 350m/A         | LED 2x13,4W | CRI>90 |
| 3PL32.2 M.     |             |        |
| 4PL32.2 M.     |             |        |
| With honeycomb |             |        |

| Led color  | Nominal lm | Beam spread |
|------------|------------|-------------|
| 2 = 2700°K | 2x1650     | 37°         |
| 3 = 3000°K | 2x1727     |             |
| 4 = 4000°K | 2x1786     |             |

© Driver

- 3KIT.350.1L (n° 2) on/off
- 3KIT.351.40 (n° 1) DALI - Push - 1...10V
- 3KIT.354.18 (n° 2) IGBT - Triac

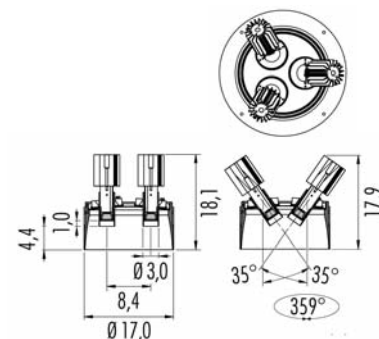

### Look x3

|                |             |        |
|----------------|-------------|--------|
| IP40           | MC-E=3      | CE     |
| 350m/A         | LED 3x13,4W | CRI>90 |
| 3PL33.2 M.     |             |        |
| 4PL33.2 M.     |             |        |
| With honeycomb |             |        |

| Led color  | Nominal lm | Beam spread |
|------------|------------|-------------|
| 2 = 2700°K | 3x1650     | 37°         |
| 3 = 3000°K | 3x1727     |             |
| 4 = 4000°K | 3x1786     |             |

© Driver


- 3KIT.350.1L (n° 3) on/off
- 3KIT.352.15 (n° 3) DALI
- 3KIT.353.15 (n° 3) Push - 1...10V
- 3KIT.354.18 (n° 3) IGBT - Triac

Housing for plasterboard

- 1K00.170.01 Ø 19,0 cm


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04 Ø 8,0 trimless (for plasterboard and brickwork)

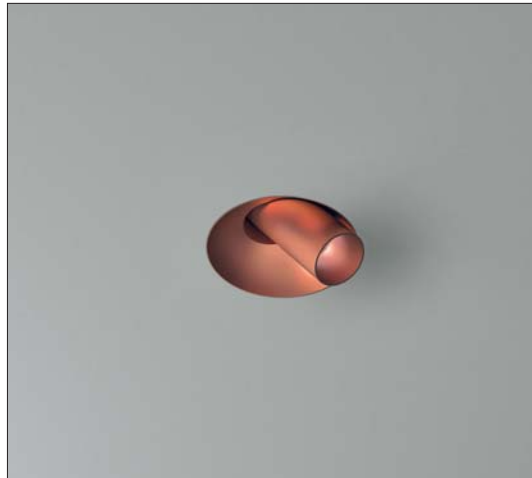

- Frame
- 
- 02 ● Black  
06 ○ White  
C1 ● Copper Anodized  
S1 ● Brass Anodized

*Finishes C1 and S1 are  
available from 30/09/2019*



IP40

CE

350m/A

LED 13,4W

CRI>90

3P04.2 S.

4P04.2 S.

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700°K

1650

25°

3 = 3000°K

1727

4 = 4000°K

1786

© (m-M) Driver

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-2) DALI - Push - 1...10V  
*Remote installation*

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

Housing for plasterboard  $\varnothing$  9,5cm

- **1Z00.080.01** Single
- **1Z00.080.2L** Double
- **1Z00.080.3L** Triple




*easy Pop 04* Ø 8,0 with trim (for plasterboard and brickwork)



- *Frame*
- 
- 02 ● Black  
06 ○ White  
C1 ● Copper Anodized  
S1 ● Brass Anodized

*Finishes C1 and S1 are  
available from 30/09/2019*



IP40

CE

350lm/A

LED 13,4W

CRI>90

3E04.2 ■ S. □

4E04.2 ■ S. □

With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1650       | 25°           |
| 3 = 3000 °K | 1727       |               |
| 4 = 4000 °K | 1786       |               |

© (m-M) Driver

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-2) DALI - Push - 1...10V  
*Remote installation*

**3KIT.352.15** (1-1) DALI


**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ora




Housing for brickwork

● **1E00.080.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop 04 $\varnothing$ 12,0 trimless (for plasterboard and brickwork)



IP20

220V ÷ 240V

3P04.210. GU10 max 50W

3P04.211. GU10 led

4P04.211. GU10 led

*With honeycomb*

IP20

12V

3P04.220. GU5.3 max 50W

4P04.220. GU5.3 led

*With honeycomb*

3KIT.201.050 max 50VA

Housing for plasterboard  $\varnothing$  14,0cm

- 1Z00.120.01 Single
- 1Z00.120.2L Double
- 1Z00.120.3L Triple

Housing for brickwork


- 1M00.120.01

Frame

02 Black

06 White

|           | Pop P04               | P   |
|-----------|-----------------------|-----|
| 3P04.210. | GU10                  | 8,4 |
| 3P04.211. | GU10 led              | —   |
| 4P04.211. | GU10 led + honeycomb  | —   |
| 3P04.220. | GU5.3                 | 6,8 |
| 4P04.220. | GU5.3 led + honeycomb | —   |



|                |         |        |
|----------------|---------|--------|
| IP40           | MC-E=3  | CE     |
| 350lm/A        | LED 11W | CRI>90 |
| 3P04.3         | ■ ■ ■ □ |        |
| 4P04.3         | ■ ■ ■ □ |        |
| With honeycomb |         |        |

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1195       | M = 38°       |
| 3 = 3000 °K | 1257       | S = 22°       |
| 4 = 4000 °K | 1313       | T = 12°       |

© (m-M) Driver

- 3KIT.350.1L (1-1) on/off
- 3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation
- 3KIT.352.15 (1-1) DALI
- 3KIT.353.15 (1-1) Push - 1...10V
- 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore

Housing for plasterboard Ø 14,0cm


- 1Z00.120.01 Single
- 1Z00.120.2L Double
- 1Z00.120.3L Triple

Housing for brickwork

- 1M00.120.01

|                | Pop P04              | P   | P1  |
|----------------|----------------------|-----|-----|
| 3P04.3 ■ ■ ■ □ | led IP40             | 6,8 | 2,5 |
| 3P04.3 ■ ■ S □ | led IP40             | 6,8 | 5,5 |
| 3P04.3 ■ ■ T □ | led IP40             | 6,8 | 2,5 |
| 4P04.3 ■ ■ ■ □ | led IP40 + honeycomb | 6,8 | 2,5 |
| 4P04.3 ■ ■ S □ | led IP40 + honeycomb | 7,4 | 5,5 |
| 4P04.3 ■ ■ T □ | led IP40 + honeycomb | 6,8 | 2,5 |

## Pop 04A Magic Ø 3,0 (only for plasterboard)



□ Frame

02 ● Black  
06 ○ White

IP40

350m/A

3P04A.2 ■ M. □

4P04A.2 ■ M. □

With honeycomb

■ Led color

CE

LED 13,4W

CRI>85

Nominal lm

▲ Beam spread

2 = 2700 °K

1650

35°

3 = 3000 °K

1727

4 = 4000 °K

1786

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-2) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

Housing for plasterboard


● 1W00.085.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop 04B Magic Ø 3,0 (only for plasterboard)



|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |



IP40 ©

CE ▽ Ⓢ

350m/A

LED 13,4W

CRI>85

3P04B.2 ■ M. □

4P04B.2 ■ M. □

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K 1650

35°

3 = 3000 °K 1727

4 = 4000 °K 1786

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-2) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ora

Housing for plasterboard

● 1W00.085.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


## Pop 04C Magic Ø 3,0 (only for plasterboard)



□ Frame

02 ● Black

06 ○ White

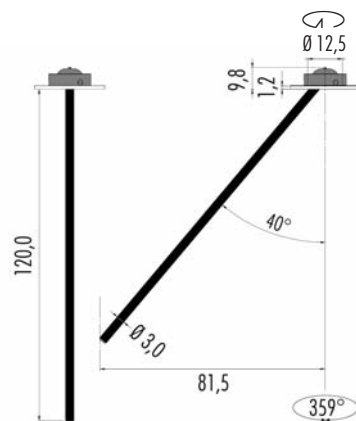

IP40 ©

CE ▼ Ⓢ

350m/A

LED 13,4W

CRI>85

3P04C.2 ■ M. □

4P04C.2 ■ M. □

With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1650       | 35°           |
| 3 = 3000 °K | 1727       |               |
| 4 = 4000 °K | 1786       |               |

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-2) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery, Driver not included)

3KIT.900.01 (1-1) 1:00 hour

3KIT.900.03 (1-1) 3:00 hours

Housing for plasterboard

- 1W00.125.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


# Pop 04K Magic Ø 3,0 ceiling



Frame

02  Black

06  White

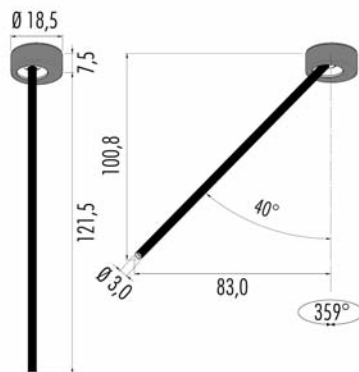

IP40 ©

CE V

220-240V

LED 13,4W

CRI>90

3P04K. 2  M.  dimm. IGBT - TRIAC

4P04K. 2  M.  dimm. IGBT - TRIAC

With honeycomb

3P04KA2  M.  DALI

4P04KA2  M.  DALI

With honeycomb

3P04KG2  M.  Push - 1...10V

4P04KG2  M.  Push - 1...10V

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

1650

35°

3 = 3000 °K

1727

4 = 4000 °K

1786


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



## Pop 05 Ø 6,7 (only for brickwork) RDS



|    | Frame |
|----|-------|
| 02 | Black |
| 06 | White |



|            | Pop P05 | P    | P1  |
|------------|---------|------|-----|
| 3P05.200.□ | GU4     | 8,5  | 2,5 |
| 3P05.2■S.□ | led     | 11,6 | 3,7 |

IP20

12V

3P05.200.□

GU4 max 35W

3KIT.201.050

max 50VA

Dimmable gear: IGBT

CE

IP40

350m/A

3P05.2■S.□

LED 11W

CE

CRI>90

■ Led color

Nominal lm

▲ Beam spread

2 = 2700°K

1195

22°

3 = 3000°K

1257

4 = 4000°K

1313

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI


3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ore

3KIT.900.03 (1-1) 3:00 hours/ore



Housing for brickwork

● 1M00.067.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


# Pop 05 Ø 8,2 (only for brickwork) ROS



|                               |                          |                    |                |   |   |
|-------------------------------|--------------------------|--------------------|----------------|---|---|
| IP40                          | ©                        | DimToWarm          | CE             | ▽ | ⊕ |
| 220V ÷ 240V                   | LED 6W                   | CRI 95             | Driver incluso |   |   |
| 3P05.3W                       | □                        | dimm IGBT - TRIAC  |                |   |   |
| 4P05.3W                       | □                        | dimm IGBT - TRIAC  |                |   |   |
| <i>With honeycomb</i>         |                          |                    |                |   |   |
| ■ Led color                   | Nominal lm               | ▲ Beam spread      |                |   |   |
| W = max 3000°K<br>min. 1800°K | max 445 lm<br>min. 10 lm | M = 30°<br>S = 18° |                |   |   |

□ Frame

- 02 ● Black  
06 ○ White



|            | Pop P05              | P    | P <sub>1</sub> |
|------------|----------------------|------|----------------|
| 3P05.210.□ | GU10                 | 11,0 | 2,5            |
| 3P05.211.□ | GU10 led             | —    | 2,5            |
| 3P05.220.□ | GU5.3                | 9,4  | 2,5            |
| 3P05.3     | ■ M.□                | 10,5 | 0,5            |
| 3P05.3     | ■ S.□                | 11,4 | 2,5            |
| 3P05.3     | ■ T.□                | 9,4  | 0,5            |
| 4P05.3     | ■ M.□                | 11,0 | 0,5            |
| 4P05.3     | ■ S.□                | 11,9 | 2,5            |
| 4P05.3     | ■ T.□                | 9,9  | 0,5            |
| 3P05.3WM.□ | led IP40             | 6,8  | 0,5            |
| 3P05.3WS.□ | led IP40             | 8,8  | 2,5            |
| 4P05.3WM.□ | led IP40 + honeycomb | 7,3  | 0,5            |
| 4P05.3WS.□ | led IP40 + honeycomb | 9,3  | 2,5            |

|                       |            |      |         |   |
|-----------------------|------------|------|---------|---|
| IP20                  | ⊗          | CE   | ▽       | ⊕ |
| 220V ÷ 240V           | 3P05.210.□ | GU10 | max 50W |   |
|                       | 3P05.211.□ | GU10 | led     |   |
|                       | 4P05.211.□ | GU10 | led     |   |
| <i>With honeycomb</i> |            |      |         |   |

|                            |              |          |         |   |
|----------------------------|--------------|----------|---------|---|
| IP20                       | ⊗            | CE       | ▽       | ⊕ |
| 12V                        | 3P05.220.□   | GU5.3    | max 50W |   |
|                            | 4P05.220.□   | GU5.3    | led     |   |
| <i>With honeycomb</i>      |              |          |         |   |
|                            | 3KIT.201.050 | max 50VA |         |   |
| <i>Dimmable gear: IGBT</i> |              |          |         |   |

|                       |         |        |    |   |   |
|-----------------------|---------|--------|----|---|---|
| IP40                  | ⊗       | MC-E=3 | CE | ▽ | ⊕ |
| 350mA                 | LED 11W | CRI>90 |    |   |   |
|                       | 3P05.3  | ■      | ▲  | □ |   |
|                       | 4P05.3  | ■      | ▲  | □ |   |
| <i>With honeycomb</i> |         |        |    |   |   |


| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700°K  | 1195       | M = 38°       |
| 3 = 3000°K  | 1257       | S = 22°       |
| 4 = 4000°K  | 1313       | T = 10°       |

© (m-M) Driver

|                   |   |
|-------------------|---|
| 3KIT.350.1L (1-1) | on/off  |
| 3KIT.351.40 (1-3) | DALI - Push - 1...10V<br><i>Remote installation</i> |
| 3KIT.352.15 (1-1) | DALI  |
| 3KIT.353.15 (1-1) | Push - 1...10V                                      |
| 3KIT.354.18 (1-1) | IGBT - TRIAC  |

Emergency unit: (inverter + battery. Driver not included)

|                   |                |
|-------------------|----------------|
| 3KIT.900.01 (1-1) | 1:00 hour/ora  |
| 3KIT.900.03 (1-1) | 3:00 hours/ore |




Housing for brickwork

- 1M00.082.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop 05 Wing Ø 6,7 (only for plasterboard) **ROS**



□ Frame

02 ● Black

06 ○ White

|              | Pop PW05 | P    | P <sub>1</sub> |
|--------------|----------|------|----------------|
| 3PW05.200.□  | GU4      | 8,5  | 2,5            |
| 3PW05.201.□  | GU4 led  | —    | 2,5            |
| 3PW05.3■ S.□ | led      | 11,6 | 3,7            |

IP20

12V

3PW05.200.□ GU4 max 35W

3KIT.201.050 max 50VA

Dimmable gear: IGBT

CE V

IP40

350m/A

3PW05.2■ S.□

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

1195

22°

3 = 3000 °K

1257

4 = 4000 °K

1313

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC


Emergency unit: (inverter + battery, Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

# Pop 05 Wing Ø 8,2 (only for plasterboard) ROS



|  |       |
|--|-------|
| <input type="checkbox"/>   | Frame |
| 02 <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span>                          | Black |
| 06 <span style="display: inline-block; width: 10px; height: 10px; background-color: white; border-radius: 50%; border: 1px solid black;"></span> | White |

|  | Pop PW05             | P    | P <sub>1</sub> |
|--|----------------------|------|----------------|
| 3PW05.210.□  | GU10                 | 11,0 | 2,5            |
| 3PW05.211.□  | GU10 led             | —    | 2,5            |
| 3PW05.220.□  | GU5.3                | 9,4  | 2,5            |
| 3PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> M.□ | led IP40             | 10,5 | 0,5            |
| 3PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> S.□ | led IP40             | 11,4 | 2,5            |
| 3PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> T.□ | led IP40             | 9,4  | 0,5            |
| 4PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> M.□ | led IP40 + honeycomb | 11,0 | 0,5            |
| 4PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> S.□ | led IP40 + honeycomb | 11,9 | 2,5            |
| 4PW05.3 <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black;"></span> T.□ | led IP40 + honeycomb | 9,9  | 0,5            |
| 3PW05.3WM.□  | led IP40             | 7,3  | 0,5            |
| 3PW05.3WS.□  | led IP40             | 9,3  | 2,5            |
| 4PW05.3WM.□  | led IP40 + honeycomb | 7,3  | 0,5            |
| 4PW05.3WS.□  | led IP40 + honeycomb | 9,3  | 2,5            |

IP20 CE V □

220V ÷ 240V

3PW05.210.□ GU10 max 50W

3PW05.211.□ GU10 led

4PW05.211.□ GU10 led

With honeycomb

IP20 CE V □

12V

3PW05.220.□ GU5.3 max 50W

4PW05.220.□ GU5.3 led

With honeycomb

3KIT.201.050 max 50VA

Dimmable gear: IGBT

IP40 CE V □

350m/A

LED 11W

CRI>90

3PW05.3    .□

4PW05.3    .□

With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1195       | M = 38°       |
| 3 = 3000 °K | 1257       | S = 22°       |
| 4 = 4000 °K | 1313       | T = 10°       |

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

IP40 CE V □ DimToWarm

220V ÷ 240V

LED 6W CRI 95 *Driver incluso*

3PW05.3W   .□ dimm IGBT - TRIAC

4PW05.3W   .□ dimm IGBT - TRIAC

With honeycomb

| ■ Led color                  | Nominal lm               | ▲ Beam spread      |
|------------------------------|--------------------------|--------------------|
| W= max 3000°K<br>min. 1800°K | max 445 lm<br>min. 10 lm | M = 30°<br>S = 18° |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

## Pop Ring Static Ø 7,0 (only for plasterboard)



|             | Pop PRS1                   | P    | P1  |
|-------------|----------------------------|------|-----|
| 3PRS.210.□  | GU10                       | 12,6 | 4,4 |
| 3PRS.220.□  | GU5.3                      | 10,4 | 4,4 |
| 4PRS.220.□  | GU5.3 led + honeycomb      | 10,9 | 4,4 |
| 3PRS.220.□  | GU5.3 IP44                 | 10,4 | 4,0 |
| 4PRS.220.□  | GU5.3 IP44 led + honeycomb | 10,9 | 4,0 |
| 3PRS.3 ■▲.□ | Led IP40                   | 13,7 | 4,4 |
| 4PRS.3 ■▲.□ | Led IP40+ honeycomb        | 14,2 | 4,4 |
| 3PRS.3 ■▲.□ | Led IP54                   | 13,7 | 4,0 |
| 4PRS.3 ■▲.□ | Led IP54 + honeycomb       | 14,2 | 4,0 |
| 3PRS.3W▲.□  | Led IP40                   | 10,9 | 4,4 |
| 4PRS.3W▲.□  | Led IP40 + honeycomb       | 11,4 | 4,4 |
| 3PRS.3W▲.□  | Led IP54                   | 10,9 | 4,0 |
| 4PRS.3W▲.□  | Led IP54 + honeycomb       | 11,4 | 4,0 |

|                       |                     |   |   |
|-----------------------|---------------------|---|---|
| <b>IP20</b> ☒         | CE                  | ▽ | □ |
| 220V ÷ 240V           |                     |   |   |
| <b>3PRS.210.□</b> □   | <b>GU10</b> max 50W |   |   |
| <b>4PRS.210.□</b> □   | <b>GU10</b> led     |   |   |
| <i>With honeycomb</i> |                     |   |   |


|                       |                      |   |   |
|-----------------------|----------------------|---|---|
| <b>IP20</b> ☒ ☒       | CE                   | ▽ | ◆ |
| 12V                   |                      |   |   |
| <b>3PRS.220.□</b> □   | <b>GU5.3</b> max 50W |   |   |
| <b>4PRS.220.□</b> □   | <b>GU5.3</b> led     |   |   |
| <i>With honeycomb</i> |                      |   |   |

|                            |          |  |  |
|----------------------------|----------|--|--|
| <b>3KIT.201.050</b>        | max 50VA |  |  |
| <i>Dimmable gear: IGBT</i> |          |  |  |

|                       |                  |   |   |
|-----------------------|------------------|---|---|
| <b>IP44</b> ☒ ☒       | CE               | ▽ | ◆ |
| 12V                   |                  |   |   |
| <b>3PRS.220.□</b> □   | <b>GU5.3</b> led |   |   |
| <b>4PRS.220.□</b> □   | <b>GU5.3</b> led |   |   |
| <i>With honeycomb</i> |                  |   |   |

|                            |          |  |  |
|----------------------------|----------|--|--|
| <b>3KIT.201.050</b>        | max 50VA |  |  |
| <i>Dimmable gear: IGBT</i> |          |  |  |

- *Frame*
- 02 ● Black
- 06 ○ White



|                       |                |    |   |        |
|-----------------------|----------------|----|---|--------|
| <b>IP40</b> ☒         | MC-E=3         | CE | ▽ | ◆      |
| 350m/A                | <b>LED 11W</b> |    |   | CRI>90 |
| <b>3PRS.3 ■▲.□</b> □  |                |    |   |        |
| <b>4PRS.3 ■▲.□</b> □  |                |    |   |        |
| <i>With honeycomb</i> |                |    |   |        |

|                       |                |    |   |        |
|-----------------------|----------------|----|---|--------|
| <b>IP54</b> ☒         | MC-E=3         | CE | ▽ | ◆      |
| 350m/A                | <b>LED 11W</b> |    |   | CRI>90 |
| <b>3PRS.3 ■▲.□</b> □  |                |    |   |        |
| <b>4PRS.3 ■▲.□</b> □  |                |    |   |        |
| <i>With honeycomb</i> |                |    |   |        |

|                    |                   |                      |
|--------------------|-------------------|----------------------|
| ■ <i>Led color</i> | <i>Nominal lm</i> | ▲ <i>Beam spread</i> |
| 2 = 2700°K         | 1195              | S = 22°              |
| 3 = 3000°K         | 1257              | T = 12°              |
| 4 = 4000°K         | 1313              |                      |

- ☒ (m-M) Driver
- 3KIT.350.1L** (1-1) on/off
- 3KIT.350.25** (2-2) on/off
- 3KIT.351.40** (1-3) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.352.15** (1-1) DALI
- 3KIT.353.15** (1-1) Push - 1...10V
- 3KIT.354.18** (1-1) IGBT - TRIAC


- Emergency unit: (inverter + battery. Driver not included)
- 3KIT.900.01** (1-1) 1:00 hour/ora
- 3KIT.900.03** (1-1) 3:00 hours/ora

|                       |                      |    |   |                       |
|-----------------------|----------------------|----|---|-----------------------|
| <b>IP40</b> ☒         | <b>DimToWarm</b>     | CE | ▽ | ◆                     |
| 220V ÷ 240V           | <b>LED 6W</b> CRI 95 |    |   | <i>Driver incluso</i> |
| <b>3PRS.3W▲.□</b> □   | IGBT - TRIAC         |    |   |                       |
| <b>4PRS.3W▲.□</b> □   | IGBT - TRIAC         |    |   |                       |
| <i>With honeycomb</i> |                      |    |   |                       |

|                       |                      |    |   |                       |
|-----------------------|----------------------|----|---|-----------------------|
| <b>IP54</b> ☒         | <b>DimToWarm</b>     | CE | ▽ | ◆                     |
| 220V ÷ 240V           | <b>LED 6W</b> CRI 95 |    |   | <i>Driver incluso</i> |
| <b>3PRS.3W▲.□</b> □   | IGBT - TRIAC         |    |   |                       |
| <b>4PRS.3W▲.□</b> □   | IGBT - TRIAC         |    |   |                       |
| <i>With honeycomb</i> |                      |    |   |                       |

|                    |                   |                      |
|--------------------|-------------------|----------------------|
| ■ <i>Led color</i> | <i>Nominal lm</i> | ▲ <i>Beam spread</i> |
| W= max 3000°K      | max 445 lm        | M = 30°              |
| min. 1800°K        | min. 10 lm        | S = 18°              |

## Pop Ring Static Ø 13,1 (only for plasterboard)



|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |

|                     |   |        |        |   |   |
|---------------------|---|--------|--------|---|---|
| <b>IP40</b>         | Ⓢ | MC-E=3 | CE     | ▽ | Ⓢ |
| 350 - 500 - 700 m/A |   |        | CRI>90 |   |   |
| <b>3PR1S.6</b> ■▲□  |   |        |        |   |   |

|                     |   |        |        |   |   |
|---------------------|---|--------|--------|---|---|
| <b>IP54</b>         | Ⓢ | MC-E=3 | CE     | ▽ | Ⓢ |
| 350 - 500 - 700 m/A |   |        | CRI>90 |   |   |
| <b>3PR9S.6</b> ■▲□  |   |        |        |   |   |

|                          |                       |                      |
|--------------------------|-----------------------|----------------------|
| Ⓢ (m-M)                  | <b>LED 12,5W</b>      | 350m/A               |
| <b>3KIT.350.1L</b> (1-1) | on/off                |                      |
| <b>3KIT.351.40</b> (1-3) | DALI - Push - 1...10V |                      |
| <b>3KIT.352.15</b> (1-1) | DALI                  |                      |
| <b>3KIT.353.15</b> (1-1) | Push - 1...10V        |                      |
| <b>3KIT.354.18</b> (1-1) | IGBT - TRIAC          |                      |
| ■ <i>Led color</i>       | <i>Nominal lm</i>     | ▲ <i>Beam spread</i> |
| 2 = 2700 °K              | 1477                  | L = 60°              |
| 3 = 3000 °K              | 1565                  | S = 24°              |
| 4 = 4000 °K              | 1635                  | T = 12°              |

|                          |                       |                      |
|--------------------------|-----------------------|----------------------|
| Ⓢ (m-M)                  | <b>LED 18,4W</b>      | 500m/A               |
| <b>3KIT.500.1L</b> (1-1) | on/off                |                      |
| <b>3KIT.501.50</b> (1-3) | DALI - Push - 1...10V |                      |
| <b>3KIT.502.20</b> (1-1) | DALI                  |                      |
| <b>3KIT.503.20</b> (1-1) | Push - 1...10V        |                      |
| <b>3KIT.504.20</b> (1-1) | IGBT - TRIAC          |                      |
| ■ <i>Led color</i>       | <i>Nominal lm</i>     | ▲ <i>Beam spread</i> |
| 2 = 2700 °K              | 2020                  | L = 60°              |
| 3 = 3000 °K              | 2140                  | S = 24°              |
| 4 = 4000 °K              | 2236                  | T = 12°              |

|                          |                       |                      |
|--------------------------|-----------------------|----------------------|
| Ⓢ (m-M)                  | <b>LED 27W</b>        | 700m/A               |
| <b>3KIT.700.1L</b> (1-1) | on/off                |                      |
| <b>3KIT.701.50</b> (1-1) | DALI - Push - 1...10V |                      |
| ■ <i>Led color</i>       | <i>Nominal lm</i>     | ▲ <i>Beam spread</i> |
| 2 = 2700 °K              | 2683                  | L = 60°              |
| 3 = 3000 °K              | 2842                  | S = 24°              |
| 4 = 4000 °K              | 2963                  | T = 12°              |

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


## Pop Ring Dynamic Ø 13,1 (only for plasterboard)



□ Frame

02 ● Black

06 ○ White



IP20

12V

**3PR1D.530.** 653 max 50W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

CE

IP20

350 - 500 m/A

**3PR1D.5**

MC-E=3

CE

CRI>90

© (m-M) **LED 12,5W** 350m/A

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1477       | L = 60°       |
| 3 = 3000 °K | 1565       | S = 24°       |
| 4 = 4000 °K | 1635       | T = 12°       |

© (m-M) **LED 18,4W** 500m/A

**3KIT.500.1L** (1-1) on/off

**3KIT.501.50** (1-3) DALI - Push - 1...10V

**3KIT.502.20** (1-1) DALI

**3KIT.503.20** (1-1) Push - 1...10V

**3KIT.504.20** (1-1) IGBT - TRIAC

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2020       | L = 60°       |
| 3 = 3000 °K | 2140       | S = 24°       |
| 4 = 4000 °K | 2236       | T = 12°       |

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.


## Pop Ring Dynamic Ø 13,1 (only for plasterboard)



□ Frame

02 ● Black

06 ○ White

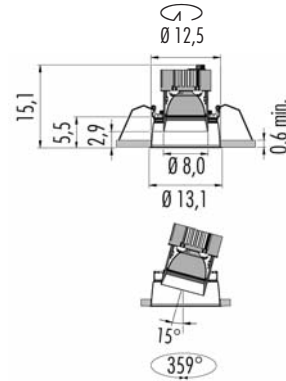

IP40 MC-E=3

500 - 700 m/A CRI>90

3PR1D.6

© (m-M) **LED 18,4W** 500m/A

3KIT.500.1L (1-1) on/off

3KIT.501.50 (1-3) DALI - Push - 1...10V

3KIT.502.20 (1-1) DALI

3KIT.503.20 (1-1) Push - 1...10V

3KIT.504.20 (1-1) IGBT - TRIAC

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2020       | M = 54°       |
| 3 = 3000 °K | 2140       | S = 26°       |
| 4 = 4000 °K | 2236       | T = 17°       |

© (m-M) **LED 27W** 700m/A

3KIT.700.1L (1-1) on/off

3KIT.701.50 (1-1) DALI - Push - 1...10V

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2683       | M = 54°       |
| 3 = 3000 °K | 2842       | S = 26°       |
| 4 = 4000 °K | 2963       | T = 17°       |

Emergency unit: (inverter + battery. Driver not included)


3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.



Pop Ring Pull Ø 12,5 (only for plasterboard)

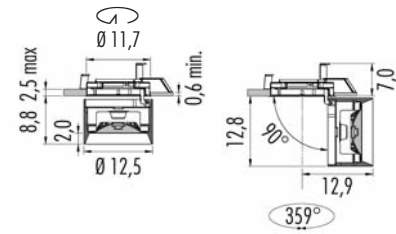

IP20 MC-E-3

350 m/A CRI>90

3PRIP.5

(m-M) **LED 12,5W** 350m/A

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V


**3KIT.354.18** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1477       | L = 60°     |
| 3 = 3000 °K | 1565       | S = 24°     |
| 4 = 4000 °K | 1635       | T = 12°     |

Frame

02 Black

06 White

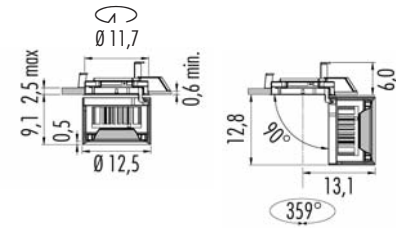

IP20 MC-E=3

500 m/A - 600 m/A CRI>90

3PR1P.6

© (m-M) **LED 18,4W** 500m/A

**3KIT.500.1L** (1-1) on/off  
**3KIT.501.50** (1-3) DALI - Push - 1...10V  
**3KIT.502.20** (1-1) DALI  
**3KIT.503.20** (1-1) Push - 1...10V  
**3KIT.504.20** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2020       | L = 60°     |
| 3 = 3000 °K | 2140       | S = 24°     |
| 4 = 4000 °K | 2236       | T = 12°     |

© (m-M) **LED 23W** 600m/A

**3KIT.600.1L** (1-1) on/off  
**3KIT.601.50** (1-1) DALI - Push - 1...10V

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2228       | L = 60°     |
| 3 = 3000 °K | 2357       | S = 24°     |
| 4 = 4000 °K | 2455       | T = 12°     |

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

IP20

12V

**3PR1P.530.** **G53** max 50W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.


# Pop 06 Ø 6,0



□ Frame

02 ● Black

06 ○ White

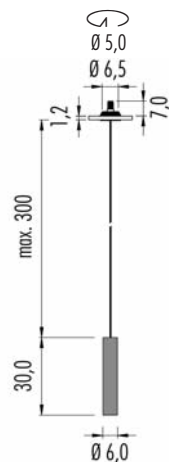

IP20 **ARC**

220-240V

**3P06A.210.** □ GU10 1x50W

IP20 Flicker < 20%


220-240V 9,5W CRI>90

**3P06A.K** ■ S. □ dimm. IGBT - TRIAC

■ *Led color* *Nominal lm* *Beam spread*

2 = 2700 °K 710 24°

3 = 3000 °K 760

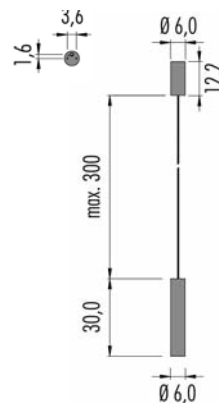

IP20 **CUP**

220-240V

**3P06.210.** □ GU10 1x50W

IP20 Flicker < 20%

220-240V 9,5W CRI>90

**3P06.K** ■ S. □ dimm. IGBT - TRIAC

■ *Led color* *Nominal lm* *Beam spread*

2 = 2700 °K 710 24°

3 = 3000 °K 760


Pop 06  $\varnothing$  12,0 **ROS**



Frame

02  Black

06  White

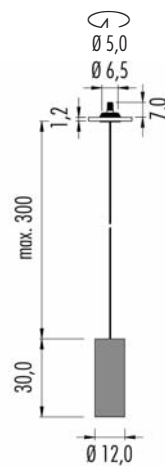


IP54 **ARC** MC-E=3

220-240V 18,5W CRI>90

**3P06A.5**  dimm. IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2683       | 24°         |
| 3 = 3000 °K | 2842       |             |
| 4 = 4000 °K | 2963       |             |

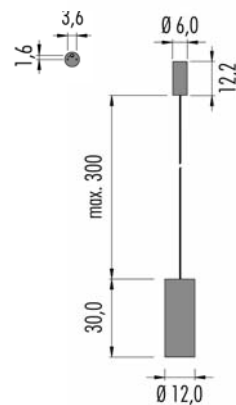

IP54 **CUP** MC-E=3

220-240V 18,5W CRI>90


**3P06.5**  dimm. IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2683       | 24°         |
| 3 = 3000 °K | 2842       |             |
| 4 = 4000 °K | 2963       |             |

# Pop 06 Ø 6,0 bi-color



ARC: recessed canopy for plasterboard or wood ceiling - CUP: external canopy

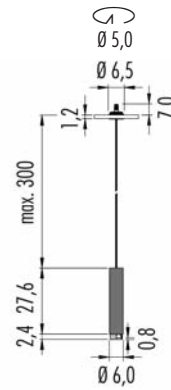


IP20 **ARC** Flicker < 20% **CE** **MC-E=3**

220-240V 9,5W CRI>90 dimm. IGBT - TRIAC

- 3P06A.K ■ S.KS
- 3P06A.K ■ S.WS
- 3P06A.K ■ S.BS
- 3P06A.K ■ S.GS
- 3P06A.K ■ S.PS
- 3P06A.K ■ S.RS

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 710        | 24°         |
| 3 = 3000 °K | 760        |             |



IP20 **CUP** Flicker < 20% **CE** **MC-E=3**

220-240V 9,5W CRI>90 dimm. IGBT - TRIAC

- 3P06C.K ■ S.KS
- 3P06C.K ■ S.WS
- 3P06C.K ■ S.BS
- 3P06C.K ■ S.GS
- 3P06C.K ■ S.PS
- 3P06C.K ■ S.RS

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 710        | 24°         |
| 3 = 3000 °K | 760        |             |



|    | Up | Down | ARC         | CUP   | cable |       |
|----|----|------|-------------|-------|-------|-------|
| KS | ●  | ●    | Black/Brass | White | Black | Brass |
| WS | ●  | ●    | White/Brass | White | White | Brass |
| BS | ●  | ●    | Blue/Brass  | White | Blue  | Brass |
| GS | ●  | ●    | Green/Brass | White | Green | Brass |
| PS | ●  | ●    | Rose/Brass  | White | Rose  | Brass |
| RS | ●  | ●    | Red/Brass   | White | Red   | Brass |

Time delivery: 25 Working Days

# Pop 06 Ø 12,0 bi-color



ARC: recessed canopy for plasterboard or wood ceiling - CUP: external canopy

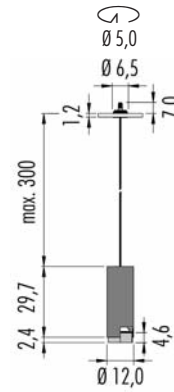

|             |           |            |             |                   |
|-------------|-----------|------------|-------------|-------------------|
| IP20        | ©         | ARC        | CE          | MC-E=3            |
| 220-240V    |           | 18,5W      | CRI>90      | dim. IGBT - TRIAC |
| 3P06A.5     | ■ S.KS    |            |             |                   |
| 3P06A.5     | ■ S.WS    |            |             |                   |
| 3P06A.5     | ■ S.BS    |            |             |                   |
| 3P06A.5     | ■ S.GS    |            |             |                   |
| 3P06A.5     | ■ S.PS    |            |             |                   |
| 3P06A.5     | ■ S.RS    |            |             |                   |
| ■ Led color |           | Nominal lm | Beam spread |                   |
| 2           | = 2700 °K | 2176       | 24°         |                   |
| 3           | = 3000 °K | 2301       |             |                   |
| 4           | = 4000 °K | 2400       |             |                   |

|             |           |            |             |                   |
|-------------|-----------|------------|-------------|-------------------|
| IP20        | ©         | CUP        | CE          | MC-E=3            |
| 220-240V    |           | 18,5W      | CRI>90      | dim. IGBT - TRIAC |
| 3P06C.5     | ■ S.KS    |            |             |                   |
| 3P06C.5     | ■ S.WS    |            |             |                   |
| 3P06C.5     | ■ S.BS    |            |             |                   |
| 3P06C.5     | ■ S.GS    |            |             |                   |
| 3P06C.5     | ■ S.PS    |            |             |                   |
| 3P06C.5     | ■ S.RS    |            |             |                   |
| ■ Led color |           | Nominal lm | Beam spread |                   |
| 2           | = 2700 °K | 2176       | 24°         |                   |
| 3           | = 3000 °K | 2301       |             |                   |
| 4           | = 4000 °K | 2400       |             |                   |

|    | Up | Down | ARC   | CUP   | cable |
|----|----|------|-------|-------|-------|
| KS | ●  | ●    | White | Black | Brass |
| WS | ●  | ●    | White | White | Brass |
| BS | ●  | ●    | White | Blue  | Brass |
| GS | ●  | ●    | White | Green | Brass |
| PS | ●  | ●    | White | Rose  | Brass |
| RS | ●  | ●    | White | Red   | Brass |

Time delivery: 25 Working Days


## Pop 07 $\varnothing 6,0$



Frame

02  Black

06  White



IP20

CE

220-240V

3P07.210.

GU10 1x50W

IP20

Flicker < 20%

CE

MC-E=3

220-240V

9,5W

CRI>90

3P07.K  S.

dimm. IGBT - TRIAC

Led color

Nominal lm

Beam spread

2 = 2700 °K

710

24°

3 = 3000 °K

760

Pop 07  $\varnothing$  12,0 ROS




IP54 © CE  $\nabla$  MC-E=3

220-240V 18,5W CRI>90 dimm. IGBT - TRIAC

3P07.5 ■ S.□

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2176       | 24°         |
| 3 = 3000 °K | 2301       |             |
| 4 = 4000 °K | 2400       |             |




□ Frame

02 ● Black

06 ○ White



# Pop 07 $\varnothing$ 6,0 bi-color




|             |               |                    |        |
|-------------|---------------|--------------------|--------|
| IP20        | Flicker < 20% | CE                 | MC-E=3 |
| 220-240V    | 9,5W CRI>90   | dimm. IGBT - TRIAC |        |
| 3P07.K      | ■ S.KS        | .....              |        |
| 3P07.K      | ■ S.WS        | .....              |        |
| 3P07.K      | ■ S.BS        | .....              |        |
| 3P07.K      | ■ S.GS        | .....              |        |
| 3P07.K      | ■ S.PS        | .....              |        |
| 3P07.K      | ■ S.RS        | .....              |        |
| ■ Led color | Nominal lm    | Beam spread        |        |
| 2 = 2700 °K | 710           | 24°                |        |
| 3 = 3000 °K | 760           |                    |        |

Up  Down

- KS ● ● Black/Brass
- WS ● ● White/Brass
- BS ● ● Blue/Brass
- GS ● ● Green/Brass
- PS ● ● Rose/Brass
- RS ● ● Red/Brass

Time delivery: 25 Working Days

# Pop 07 $\varnothing$ 12,0 bi-color



Up  Down

|    |  |             |
|----|--|-------------|
| KS |  | Black/Brass |
| WS |  | White/Brass |
| BS |  | Blue/Brass  |
| GS |  | Green/Brass |
| PS |  | Rose/Brass  |
| RS |  | Red/Brass   |

Time delivery: 25 Working Days

|          |       |        |                   |
|----------|-------|--------|-------------------|
| IP20     |       |        | MC-E=3            |
| 220-240V | 18,5W | CRI>90 | dim. IGBT - TRIAC |
| 3P07.5   |       | S.KS   | .....             |
| 3P07.5   |       | S.WS   | .....             |
| 3P07.5   |       | S.BS   | .....             |
| 3P07.5   |       | S.GS   | .....             |
| 3P07.5   |       | S.PS   | .....             |
| 3P07.5   |       | S.RS   | .....             |


|          |       |        |           |
|----------|-------|--------|-----------|
| IP20     |       |        | MC-E=3    |
| 220-240V | 18,5W | CRI>90 | dim. DALI |
| 3P07A5   |       | S.KS   | .....     |
| 3P07A5   |       | S.WS   | .....     |
| 3P07A5   |       | S.BS   | .....     |
| 3P07A5   |       | S.GS   | .....     |
| 3P07A5   |       | S.PS   | .....     |
| 3P07A5   |       | S.RS   | .....     |

|          |       |        |           |
|----------|-------|--------|-----------|
| IP20     |       |        | MC-E=3    |
| 220-240V | 18,5W | CRI>90 | dim. Push |
| 3P07B5   |       | S.KS   | .....     |
| 3P07B5   |       | S.WS   | .....     |
| 3P07B5   |       | S.BS   | .....     |
| 3P07B5   |       | S.GS   | .....     |
| 3P07B5   |       | S.PS   | .....     |
| 3P07B5   |       | S.RS   | .....     |

|          |       |        |              |
|----------|-------|--------|--------------|
| IP20     |       |        | MC-E=3       |
| 220-240V | 18,5W | CRI>90 | dim. 1...10V |
| 3P07C5   |       | S.KS   | .....        |
| 3P07C5   |       | S.WS   | .....        |
| 3P07C5   |       | S.BS   | .....        |
| 3P07C5   |       | S.GS   | .....        |
| 3P07C5   |       | S.PS   | .....        |
| 3P07C5   |       | S.RS   | .....        |

|   | Led color | Nominal lm | Beam spread |
|---|-----------|------------|-------------|
| 2 | 2700 °K   | 2176       | 24°         |
| 3 | 3000 °K   | 2301       |             |
| 4 | 4000 °K   | 2400       |             |

## Pop 07 small Bulb Ceiling




|    | Frame           | Bulb        |
|----|-----------------|-------------|
| 02 | Black           | Transparent |
| 06 | White           | Transparent |
| C1 | Copper Anodized | Transparent |
| S1 | Brass Anodized  | Transparent |

Available from 30/09/2019

| IP20      | 220V ÷ 240V       | e27 4W | CRI>80 |
|-----------|-------------------|--------|--------|
| 3P07.A2L. | dim. IGBT - TRIAC |        |        |
| 2700 °K   | Nominal lm        | 470    | 360°   |

## Pop 07 small Bulb ceiling/wall




|     | Frame           | Bulb          |
|-----|-----------------|---------------|
| 02M | Black           | Mirror Chrome |
| 06M | White           | Mirror Chrome |
| C1C | Copper Anodized | Mirror Copper |
| S1S | Brass Anodized  | Mirror Brass  |

Available from 30/09/2019

| IP20      | 220V ÷ 240V       | e27 7W | CRI>80 |
|-----------|-------------------|--------|--------|
| 3P07.A2L. | dim. IGBT - TRIAC |        |        |
| 2700 °K   | Nominal lm        | 806    | 180°   |

## Pop 07 big Bulb Ceiling





|    | Frame           | Bulb        |
|----|-----------------|-------------|
| 02 | Black           | Transparent |
| 06 | White           | Transparent |
| C1 | Copper Anodized | Transparent |
| S1 | Brass Anodized  | Transparent |

Available from 30/09/2019

| IP20     | 220V ÷ 240V       | e27 4W | CRI>80 |
|----------|-------------------|--------|--------|
| 3P07.B2L | dim. IGBT - TRIAC |        |        |
| 2700 °K  | Nominal lm        | 470    | 360°   |

## Pop 07 big Bulb ceiling/wall

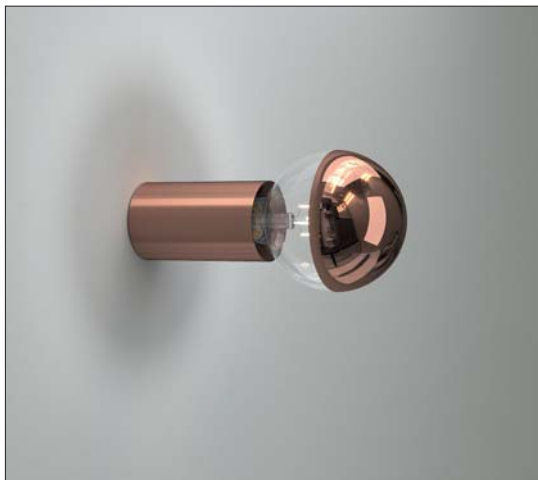

|     | Frame           | Bulb          |
|-----|-----------------|---------------|
| 02M | Black           | Mirror Chrome |
| 06M | White           | Mirror Chrome |
| C1C | Copper Anodized | Mirror Copper |
| S1S | Brass Anodized  | Mirror Brass  |


Available from 30/09/2019

| IP20     | 220V ÷ 240V       | e27 7W | CRI>80 |
|----------|-------------------|--------|--------|
| 3P07.B2L | dim. IGBT - TRIAC |        |        |
| 2700 °K  | Nominal lm        | 806    | 180°   |

---

*Pop X7* ø 11,2





IP20

CE

220V ÷ 240V

3PX7.211.□ GU10 led

4PX7.211.□ GU10 led

With honeycomb

IP40

CE MC-E=3

220-240V 9,5W CRI>90 dimm. IGBT - TRIAC

3PX7.K ■▲.□

4PX7.K ■▲.□

With honeycomb

■ Led color      ▲ Nominal lm      ▼ Beam spread

2 = 2700°K      834      M = 36°

3 = 3000°K      877      S = 24°

□ Frame

02 ● Black

06 ○ White


C1 ● Copper Anodized

S1 ● Brass Anodized

Available from 30/09/2019

Time delivery: 25 Working Days

# Pop W7

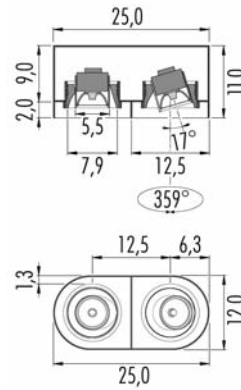

IP20

CE V □

220-240V

3PW7.211.□ GU10 led

4PW7.211.□ GU10 led

With honeycomb

IP20

CE V MC-E=3

2220-240V

2x9,5W CRI>90 dimm. IGBT - TRIAC

3PW7.K ■▲.□

4PW7.K ■▲.□

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

834

M = 36°

3 = 3000 °K

877

S = 24°

□ Out

In

02 ● Black ● Black

KC1 ● Black ● Copper Anodized

KS1 ● Black ● Brass Anodized

06 ○ White ○ White

WC1 ○ White ● Copper Anodized

WS1 ○ White ● Brass Anodized

Available from 30/09/2019

Time delivery: 25 Working Days






Pop 07 Dynamic Ø 12,5 **ROS**



Frame

02  Black

06  White

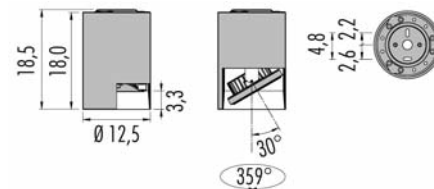

IP20 ©

CE  MC-E=3

220-240V

18,5W

CRI>90

3P07D.5    IGBT Triac

3P07DA5    DALI

3P07DG5    Push - 1...10V

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

2020

L = 60°

3 = 3000 °K

2140

S = 24°

4 = 4000 °K

2236

T = 12°


# Pop 07 Pull Ø 12,5



□ Frame

02 ● Black

06 ○ White

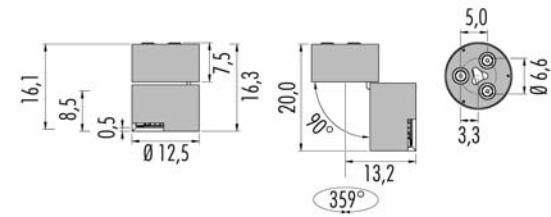

IP20 © CE ▽ MC-E=3


220-240V **18,4W** CRI>90

3P07P . 5 ■ ▽ □ IGBT Triac

3P07PA5 ■ ▽ □ DALI

3P07PG5 ■ ▽ □ Push - 1...10V

| ■ Led color | Nominal lm | ▽ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2176       | L = 60°       |
| 3 = 3000 °K | 2301       | S = 24°       |
| 4 = 4000 °K | 2400       | T = 12°       |

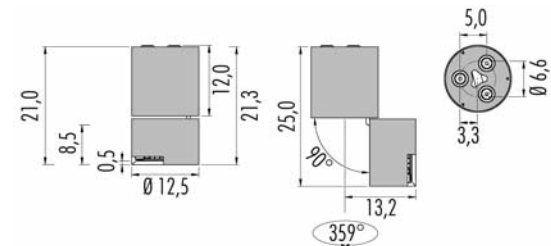

IP20 © CE ▽ MC-E=3

220-240V **23W** CRI>90

3P07P . 6 ■ ▽ □ on/off

3P07PA6 ■ ▽ □ DALI

3P07PG6 ■ ▽ □ Push - 1...10V

| ■ Led color | Nominal lm | ▽ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2228       | L = 60°       |
| 3 = 3000 °K | 2357       | S = 24°       |
| 4 = 4000 °K | 2455       | T = 12°       |


IP20 ⓘ ⓘ

CE ▽

220-240V **G53 1x50W**

3P07P.530.□

## Pop 10 trimless (for plasterboard and brickwork)



|    | Frame |
|----|-------|
| 02 | Black |
| 06 | White |

| Code       |            | P    |
|------------|------------|------|
| 3P10.210.□ | GU10       | 9,2  |
| 3P10.211.□ | GU10 Led   | —    |
| 3P10.220.□ | GU5.3      | 8,4  |
| 3P10.3■S.□ | 350m/A led | 12,6 |

IP20

220V ÷ 240V

3P10.210.□ GU10 max 50W

3P10.211.□ GU10 led

IP20

12V

3P10.220.□ GU5.3 max 50W

3KIT.201.050 max 50VA

Dimmable gear: IGBT

**ONLY in the plasterboard ceiling to obtain wall - washed effects**

IP20

350m/A

LED 11W

CRI>90

3P10.3■S.□

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

1195

24°

3 = 3000 °K

1257

4 = 4000 °K

1313

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore

Housing for plasterboard


- 1Z00.070.01

Housing for brickwork

- 1M00.070.01

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

# Pop 11 trimless (only for plasterboard)



- Frame
- 02  Black
- 06  White

IP20

12V

**3P11.200.**  **GU4** 1x35W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

IP20

700m/A

**3P11.3**  **M.**  2,4W

**Led color**

3 = 3000 °K

4 = 4000 °K

**LED 2,4W**

2,4W

**Nominal lm**

137

160

CRI>80

**Beam spread**

25°

© (m-M) Driver 700m/A

**3KIT.700.12** (1-3) on/off


**3KIT.700.32** (1-9) on/off

**3KIT.701.50** (1-14) DALI Push - 1...10V


Housing for plasterboard

- 1Z00.043.01


Ceiling installation to obtain wall - washed effects

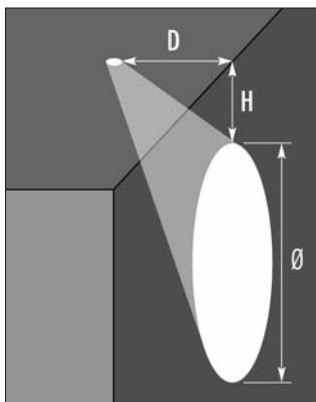


H ► Ø cm. **P11.200.**  = **GU4 (30°)**

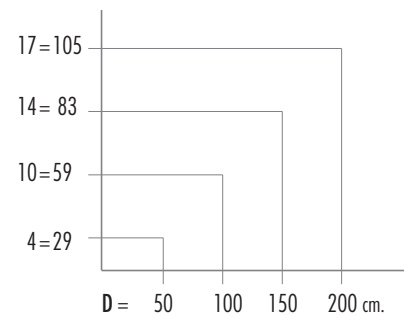

H ► Ø cm. **P11.3**  **M.XX = LED**

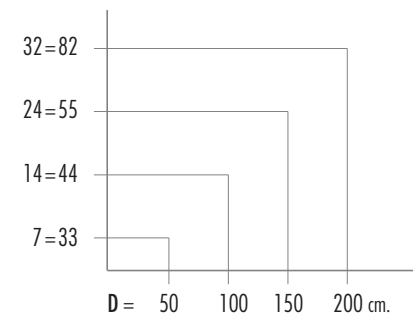

Pop P12 Ø 3,0 trimless (for plasterboard and brickwork)



|                       |            |               |   |
|-----------------------|------------|---------------|---|
| IP20                  | CE         | V             | ⊕ |
| 350m/A                | LED 13,4W  | CRI>90        |   |
| 3P12.2                | M. □       |               |   |
| 4P12.2                | M. □       |               |   |
| <i>With honeycomb</i> |            |               |   |
| ■ Led color           | Nominal lm | ▲ Beam spread |   |
| 2700 °K               | 1650       | 35°           |   |
| 3000 °K               | 1727       |               |   |
| 4000 °K               | 1786       |               |   |

© (m-M) Driver

- 3KIT.350.1L (1-1) on/off
- 3KIT.351.40 (1-2) DALI - Push - 1...10V  
*Remote installation*
- 3KIT.352.15 (1-1) DALI
- 3KIT.353.15 (1-1) Push - 1...10V
- 3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

- 3KIT.900.01 (1-1) 1:00 hour/ora
- 3KIT.900.03 (1-1) 3:00 hours/ore

Housing for plasterboard

- 1Z00.080.01  Ø 9,5cm

Housing for brickwork


- 1M00.080.01

□ Frame

- 02 ● Black
- 06 ○ White

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop P12 T Ø 3,0 with trim (only for plasterboard)



IP20



350m/A

LED 13,4W

CRI>90

3P12T.2 ■ M. □

4P12T.2 ■ M. □

With honeycomb

■ Led color

Nominal lm

▲ Beam spread

2700 °K

1650

35°

3000 °K

1727

4000 °K

1786

© (m-M) Driver

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-2) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1) 1:00 hour/ora

3KIT.900.03 (1-1) 3:00 hours/ore


□ Frame

02 ● Black

06 ○ White

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop P12/L  $\varnothing 3,0$  trimless (only for plasterboard)

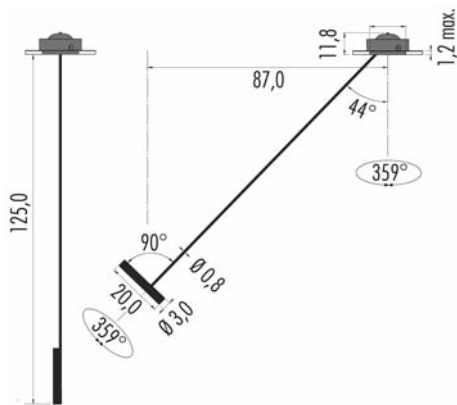

|                          |         |
|--------------------------|---------|
| <input type="checkbox"/> | Frame   |
| 02                       | ● Black |
| 06                       | ○ White |

|                       |                               |               |  |        |
|-----------------------|-------------------------------|---------------|--|--------|
| IP20                  |                               | CE            |  |        |
| 350m/A                |                               | LED 13,4W     |  | CRI>90 |
| 3P12L.2               | ■ M. <input type="checkbox"/> |               |  |        |
| 4P12L.2               | ■ M. <input type="checkbox"/> |               |  |        |
| <i>With honeycomb</i> |                               |               |  |        |
| ■ Led color           | Nominal lm                    | ▲ Beam spread |  |        |
| 2700 °K               | 1650                          | 35°           |  |        |
| 3000 °K               | 1727                          |               |  |        |
| 4000 °K               | 1786                          |               |  |        |

© (m-M) Driver

|             |       |  |
|-------------|-------|--|
| 3KIT.350.1L | (1-1) | on/off                                       |
| 3KIT.351.40 | (1-2) | DALI - Push - 1...10V<br>Remote installation |
| 3KIT.352.15 | (1-1) | DALI   |
| 3KIT.353.15 | (1-1) | Push - 1...10V                               |
| 3KIT.354.18 | (1-1) | IGBT - TRIAC                                 |

Emergency unit: (inverter + battery. Driver not included)


|             |       |                |
|-------------|-------|----------------|
| 3KIT.900.01 | (1-1) | 1:00 hour/ore  |
| 3KIT.900.03 | (1-1) | 3:00 hours/ore |

Housing for plasterboard with 1,2cm max thickness

- 1W00.125.01 Ø12,5cm


(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

# Pop P12/K Ø 3,0 ceiling

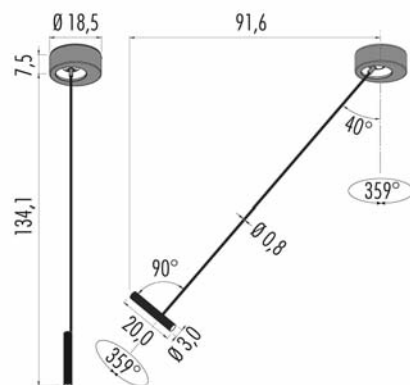


|    | Frame |
|----|-------|
| 02 | Black |
| 06 | White |

| IP20                  | ©                           | CE                 | V | ⊕      |
|-----------------------|-----------------------------|--------------------|---|--------|
| 220-240V              |                             | LED 13,4W          |   | CRI>90 |
| 3P12K . 2             | M. <input type="checkbox"/> | dimm. IGBT - TRIAC |   |        |
| 4P12K . 2             | M. <input type="checkbox"/> | dimm. IGBT - TRIAC |   |        |
| <i>With honeycomb</i> |                             |                    |   |        |
| 3P12KA2               | M. <input type="checkbox"/> | DALI               |   |        |
| 4P12KA2               | M. <input type="checkbox"/> | DALI               |   |        |
| <i>With honeycomb</i> |                             |                    |   |        |
| 3P12KG2               | M. <input type="checkbox"/> | Push - 1...10V     |   |        |
| 4P12KG2               | M. <input type="checkbox"/> | Push - 1...10V     |   |        |
| <i>With honeycomb</i> |                             |                    |   |        |
| ■ Led color           | Nominal lm                  | ▲ Beam spread      |   |        |
| 2 = 2700 °K           | 1650                        | 35°                |   |        |
| 3 = 3000 °K           | 1727                        |                    |   |        |
| 4 = 4000 °K           | 1786                        |                    |   |        |

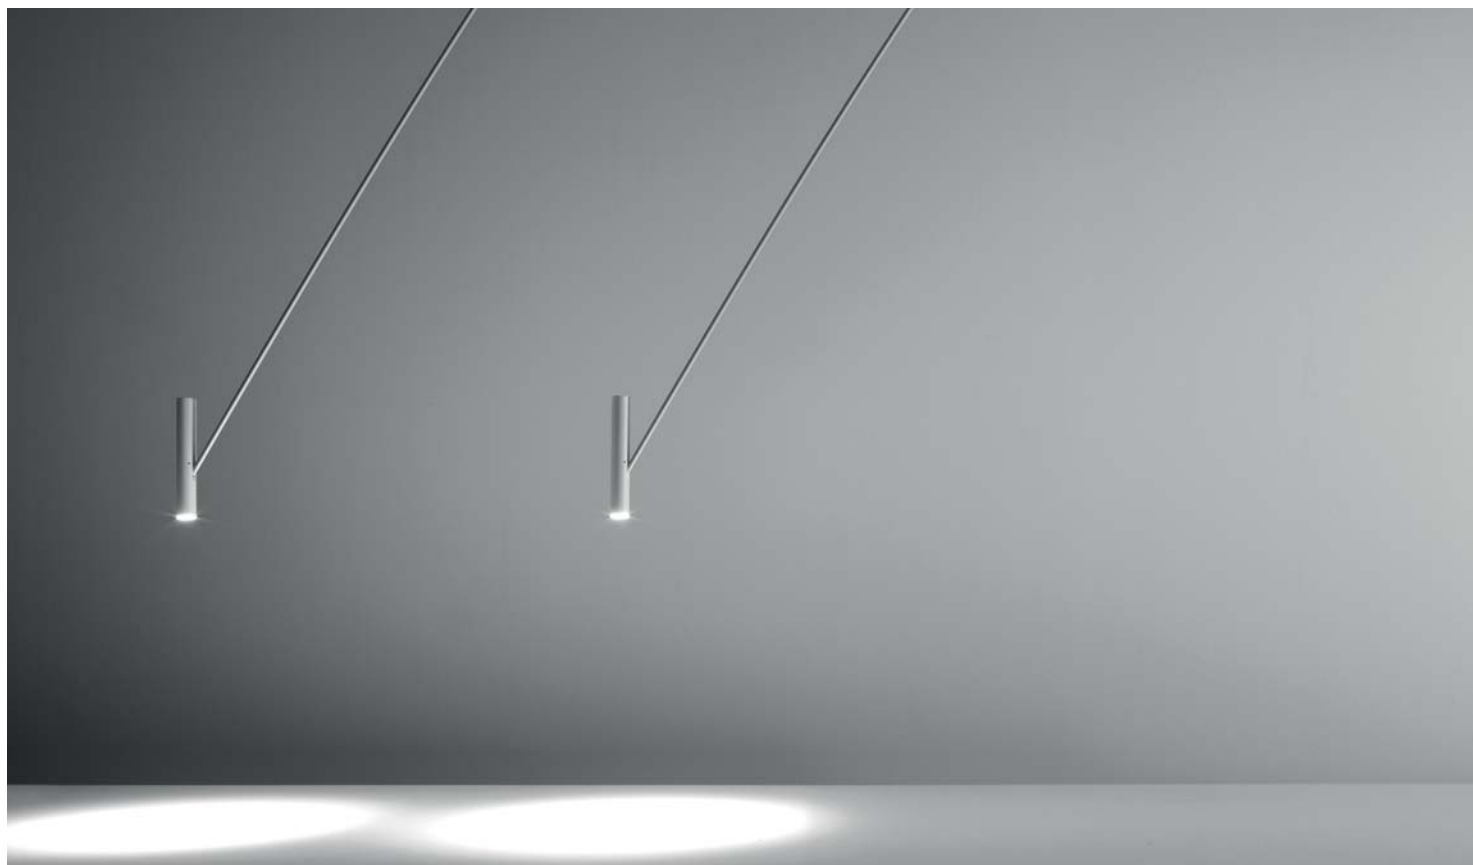



## Pop P12 Ø 7,0 trimless (for plasterboard and brickwork)

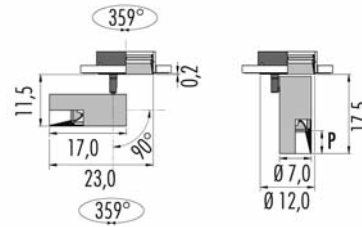

|    | Frame |
|----|-------|
| 02 | Black |
| 06 | White |

| Code       |                 | Ø   | P   |
|------------|-----------------|-----|-----|
| 3P12.210.□ | GU10            | 7,0 | 5,0 |
| 3P12.220.□ | GU5.3           | 7,0 | 5,0 |
| 3P12.3■M.□ | led             | 7,0 | 0,5 |
| 3P12.3■S.□ | led             | 7,0 | 5,0 |
| 3P12.3■T.□ | led             | 7,0 | 0,5 |
| 4P12.3■M.□ | led + honeycomb | 7,0 | 0,5 |
| 4P12.3■S.□ | led + honeycomb | 7,0 | 5,0 |
| 4P12.3■T.□ | led + honeycomb | 7,0 | 0,5 |

IP20

220V ÷ 240V

**3P12.210.□** **GU10** max 50W

IP20

12V

**3P12.220.□** **GU5.3** max 50W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

IP20

MC-E=3

350m/A

**LED 11W**

CRI>90

**3P12.3■▲.□**

**4P12.3■▲.□**

With honeycomb

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1195       | M = 38°       |
| 3 = 3000 °K | 1257       | S = 22°       |
| 4 = 4000 °K | 1313       | T = 10°       |

© (m-M) Driver

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V  
Remote installation

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora

**3KIT.900.03** (1-1) 3:00 hours/ore

Housing for plasterboard Ø 14,0cm

- **1Z00.120.01** Single
- **1Z00.120.2L** Double
- **1Z00.120.3L** Triple

Housing for brickwork

- **1M00.120.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

# Pop P12 $\varnothing$ 12,5 trimless (for plasterboard and brickwork)



IP20

12V

**3P12.530.** □ 653 max 50W

**3KIT.201.050** max 50VA

Dimmable gear: IGBT

CE

IP40

MC-E=3

CE

350 - 500 - 700 m/A

CRI>90

**3P12.6** ■ ▲ □

© (m-M) LED 12,5W 350m/A

**3KIT.350.1L** (1-1) on/off

**3KIT.351.40** (1-3) DALI - Push - 1...10V

**3KIT.352.15** (1-1) DALI

**3KIT.353.15** (1-1) Push - 1...10V

**3KIT.354.18** (1-1) IGBT - TRIAC

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 1477       | L = 60°       |
| 3 = 3000 °K | 1565       | S = 24°       |
| 4 = 4000 °K | 1635       | T = 12°       |

© (m-M) LED 18,4W 500m/A

**3KIT.500.1L** (1-1) on/off

**3KIT.501.50** (1-3) DALI - Push - 1...10V

**3KIT.502.20** (1-1) DALI

**3KIT.503.20** (1-1) Push - 1...10V

**3KIT.504.20** (1-1) IGBT - TRIAC

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2020       | L = 60°       |
| 3 = 3000 °K | 2140       | S = 24°       |
| 4 = 4000 °K | 2236       | T = 12°       |

© (m-M) LED 27W 700m/A

**3KIT.700.1L** (1-1) on/off


**3KIT.701.50** (1-1) DALI - Push - 1...10V

| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2683       | L = 60°       |
| 3 = 3000 °K | 2842       | S = 24°       |
| 4 = 4000 °K | 2963       | T = 12°       |

□ Frame

02 ● Black

06 ○ White

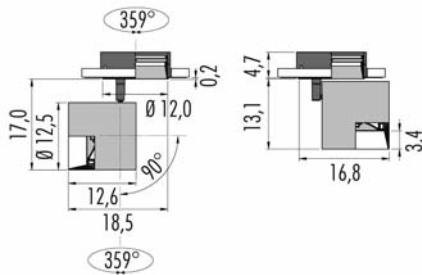

Housing for plasterboard  $\varnothing$  14,0cm

- **1Z00.120.01** Single
- **1Z00.120.2L** Double
- **1Z00.120.3L** Triple

Housing for brickwork

- **1M00.120.01**

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

Pop 12 Ring  $\varnothing 3,0$  recessed (only for plasterboard)



IP20 MC-E=3

500 mA 6W CRI>90

3PR12.2

4PR12.2

With honeycomb

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 528        | S = 24°     |
| 3 = 3000 °K | 552        |             |
| 4 = 4000 °K | 594        |             |

(m-M) Driver


3KIT.500.15 (1-1) on/off

3KIT.501.50 (1-7) DALI - Push - 1...10V  
Remote installation

3KIT.502.20 (1-3) DALI

3KIT.503.20 (1-3) Push - 1...10

3KIT.504.10 (1-1) IGBT - TRIAC

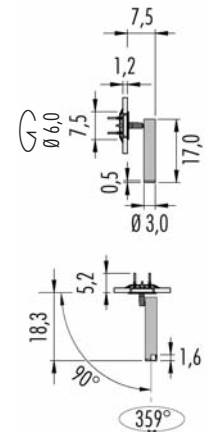

|    | Frame | Ring            |
|----|-------|-----------------|
| 02 | Black | Black           |
| 06 | White | White           |
| KC | Black | Copper Anodized |
| KS | Black | Brass Anodized  |
| WC | White | Copper Anodized |
| WS | White | Brass Anodized  |

Time delivery: 15 Working Days


# Pop 12 Cup Ø 3,0 wall/ceiling



|                       |                   |                    |
|-----------------------|-------------------|--------------------|
| IP20                  | MC-E=3            | CE                 |
| 500 m/A               | 6W                | CRI>90             |
| <b>3PC12.2</b> ■ S. □ |                   |                    |
| <b>4PC12.2</b> ■ S. □ |                   |                    |
| <i>With honeycomb</i> |                   |                    |
| ■ <i>Led color</i>    | <i>Nominal lm</i> | <i>Beam spread</i> |
| 2 = 2700 °K           | 528               | S = 24°            |
| 3 = 3000 °K           | 552               |                    |
| 4 = 4000 °K           | 594               |                    |

© (m-M) *Driver ONLY in remote installation*

- 3KIT.500.15** (1-1) on/off
- 3KIT.501.50** (1-7) DALI - Push - 1...10V
- 3KIT.502.20** (1-3) DALI
- 3KIT.503.20** (1-3) Push - 1...10
- 3KIT.504.10** (1-1) IGBT - TRIAC

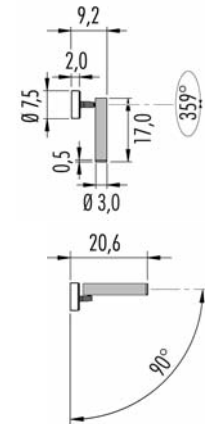

| □  | Frame   | Ring              |
|----|---------|-------------------|
| 02 | ● Black | ● Black           |
| 06 | ○ White | ○ White           |
| KC | ● Black | ● Copper Anodized |
| KS | ● Black | ● Brass Anodized  |
| WC | ○ White | ○ Copper Anodized |
| WS | ○ White | ○ Brass Anodized  |

*Time delivery: 15 Working Days*

Pop 12 Ring  $\varnothing 6,0$  recessed (only for plasterboard)



IP20 MC-E=3

350m/A 11W CRI>90

3PR12.3

4PR12.3

With honeycomb, only for S (22°) and T (10°)

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1195       | M = 38°     |
| 3 = 3000 °K | 1257       | S = 22°     |
| 4 = 4000 °K | 1313       | T = 10°     |

(m-M) Driver


3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V  
Remote installation

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

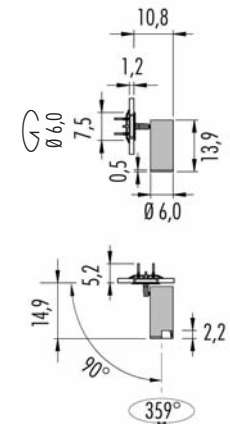

|    | Frame | Ring            |
|----|-------|-----------------|
| 02 | Black | Black           |
| 06 | White | White           |
| KC | Black | Copper Anodized |
| KS | Black | Brass Anodized  |
| WC | White | Copper Anodized |
| WS | White | Brass Anodized  |

Time delivery: 15 Working Days

# Pop 12 Cup Ø 6,0 wall/ceiling



IP20 MC-E=3

350m/A 11W CRI>90

3PC12.3

4PC12.3

With honeycomb, only for S (22°) and T (10°)

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1195       | M = 38°     |
| 3 = 3000 °K | 1257       | S = 22°     |
| 4 = 4000 °K | 1313       | T = 10°     |

© (m-M) Driver ONLY in remote installation


3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V


3KIT.354.18 (1-1) IGBT - TRIAC

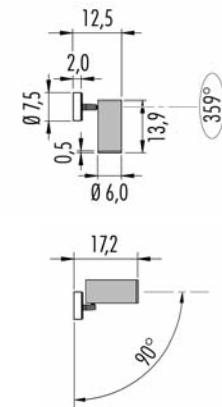

|    | Frame | Ring            |
|----|-------|-----------------|
| 02 | Black | Black           |
| 06 | White | White           |
| KC | Black | Copper Anodized |
| KS | Black | Brass Anodized  |
| WC | White | Copper Anodized |
| WS | White | Brass Anodized  |

Time delivery: 15 Working Days

## Pop 12 Ring $\varnothing 12,0$ recessed (only for plasterboard)

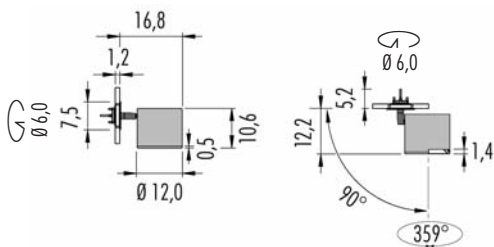

|    | Frame | Ring            |
|----|-------|-----------------|
| 02 | Black | Black           |
| 06 | White | White           |
| KC | Black | Copper Anodized |
| KS | Black | Brass Anodized  |
| WC | White | Copper Anodized |
| WS | White | Brass Anodized  |

Time delivery: 15 Working Days

IP40 © MC-E=3 CE V

350 - 500 - 700 m/A

CRI>90

3PR12.6

Driver ONLY in remote installation

© (m-M) LED 12,5W 350m/A

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1578       | L = 60°     |
| 3 = 3000 °K | 1669       | S = 24°     |
| 4 = 4000 °K | 1740       | T = 12°     |

© (m-M) LED 18,4W 500m/A

3KIT.500.1L (1-1) on/off

3KIT.501.50 (1-3) DALI - Push - 1...10V

3KIT.502.20 (1-1) DALI

3KIT.503.20 (1-1) Push - 1...10V

3KIT.504.20 (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2176       | L = 60°     |
| 3 = 3000 °K | 2301       | S = 24°     |
| 4 = 4000 °K | 2400       | T = 12°     |

© (m-M) LED 27W 700m/A


3KIT.700.1L (1-1) on/off

3KIT.701.50 (1-1) DALI - Push - 1...10V

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2914       | L = 60°     |
| 3 = 3000 °K | 3081       | S = 24°     |
| 4 = 4000 °K | 3213       | T = 12°     |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.

# Pop 12 Cup ø 12,0 wall/ceiling

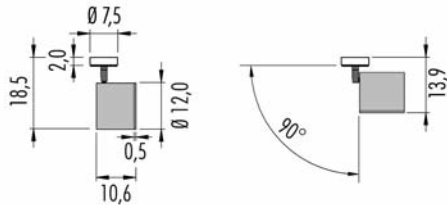

|    | Frame   | Ring              |
|----|---------|-------------------|
| 02 | ● Black | ● Black           |
| 06 | ○ White | ○ White           |
| KC | ● Black | ● Copper Anodized |
| KS | ● Black | ● Brass Anodized  |
| WC | ○ White | ● Copper Anodized |
| WS | ○ White | ● Brass Anodized  |

Time delivery: 15 Working Days

IP40 © MC-E=3 CE ▼ Ⓢ

350 - 500 - 700 m/A

CRI>90

3PC12.6 ■▲□

Driver ONLY in remote installation

© (m-M) LED 12,5W 350m/A

3KIT.350.1L (1-1) on/off

3KIT.351.40 (1-3) DALI - Push - 1...10V

3KIT.352.15 (1-1) DALI

3KIT.353.15 (1-1) Push - 1...10V

3KIT.354.18 (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1578       | L = 60°     |
| 3 = 3000 °K | 1669       | S = 24°     |
| 4 = 4000 °K | 1740       | T = 12°     |

© (m-M) LED 18,4W 500m/A

3KIT.500.1L (1-1) on/off

3KIT.501.50 (1-3) DALI - Push - 1...10V

3KIT.502.20 (1-1) DALI

3KIT.503.20 (1-1) Push - 1...10V

3KIT.504.20 (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2176       | L = 60°     |
| 3 = 3000 °K | 2301       | S = 24°     |
| 4 = 4000 °K | 2400       | T = 12°     |

© (m-M) LED 27W 700m/A

3KIT.700.1L (1-1) on/off

3KIT.701.50 (1-1) DALI - Push - 1...10V

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2914       | L = 60°     |
| 3 = 3000 °K | 3081       | S = 24°     |
| 4 = 4000 °K | 3213       | T = 12°     |

(m-M) = min. Led unit - Max Led unit.  
Led and Emergency unit, warranty only when used  
together with driver bought from Oty srl.




# Polifemo PF1




|    | Frame | Ring            |
|----|-------|-----------------|
| KC | Black | Copper Anodized |
| KS | Black | Brass Anodized  |
| WC | White | Copper Anodized |
| WS | White | Brass Anodized  |

Time delivery: 25 Working days

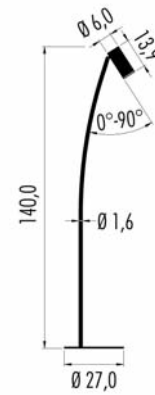

| IP20                  | ©          | MC-E=3      | CE       | ▽ |
|-----------------------|------------|-------------|----------|---|
| 100-240V              |            | 11W CRI>90  | dimmable |   |
| <b>3PF1.3</b>         | ■ S.□      |             |          |   |
| <b>4PF1.3</b>         | ■ S.□      |             |          |   |
| <i>With honeycomb</i> |            |             |          |   |
| ■ Led color           | Nominal lm | Beam spread |          |   |
| 2 = 2700 °K           | 1195       | 22°         |          |   |
| 3 = 3000 °K           | 1257       |             |          |   |
| 4 = 4000 °K           | 1313       |             |          |   |

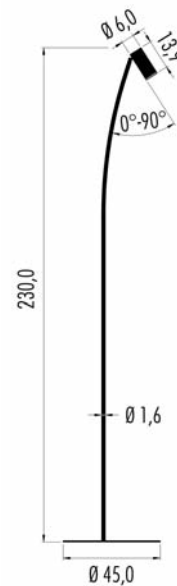


| IP20                  | ©          | MC-E=3      | CE       | ▽ |
|-----------------------|------------|-------------|----------|---|
| 100-240V              |            | 11W CRI>90  | dimmable |   |
| <b>3PF2.3</b>         | ■ S.□      |             |          |   |
| <b>4PF2.3</b>         | ■ S.□      |             |          |   |
| <i>With honeycomb</i> |            |             |          |   |
| ■ Led color           | Nominal lm | Beam spread |          |   |
| 2 = 2700 °K           | 1195       | 22°         |          |   |
| 3 = 3000 °K           | 1257       |             |          |   |
| 4 = 4000 °K           | 1313       |             |          |   |

*Polifemo PF2*



# Pop 13 Ø 7,0 wall/ceiling



- Frame
- 02  Black
- 06  White

IP20

220-240V **GU10** 1x50W P=5,0

**3P13.210.**

IP20

220-240V **GU5.3** 1x50W P=5,0

**3P13.220.**

IP20 MC-E=3

220-240V 11W CRI>90

**3P13.3**   IGBT Triac

**4P13.3**   IGBT Triac

*With honeycomb*

**3P13A3**   DALI

**4P13A3**   DALI


*With honeycomb*

**3P13G3**   Push - 1...10V

**4P13G3**   Push - 1...10V

*With honeycomb*


| Led color   | Nominal lm | Beam spread     |
|-------------|------------|-----------------|
| 2 = 2700 °K | 1119       | M = 38° (P=0,5) |
| 3 = 3000 °K | 1257       | S = 22° (P=5,0) |
| 4 = 4000 °K | 1313       | T = 10° (P=0,5) |



Installation kit on beams and horizontal surfaces

**1KIT.P136.**

## Pop 13 Ø 12,5 wall/ceiling




|                          |       |
|--------------------------|-------|
| <input type="checkbox"/> | Frame |
| 02 <input type="radio"/> | Black |
| 06 <input type="radio"/> | White |

|   |            |       |  |
|---|------------|-------|--|
| IP20                                      |            |       |  |
| 220-240V                                  | <b>653</b> | 1x50W |  |
| <b>3P13.530.</b> <input type="checkbox"/> |            |       |  |

|  |                   |                    |  |
|--|-------------------|--------------------|--|
| IP20                                   |                   |                    |  |
| 220-240V                               | <b>12,5W</b>      | CRI>90             |  |
| <b>3P13.4</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | IGBT Triac         |  |
| <b>3P13A4</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | DALI               |  |
| <b>3P13G4</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | Push - 1...10V     |  |
| <b>Led color</b>                       | <i>Nominal lm</i> | <b>Beam spread</b> |  |
| 2 = 2700 °K                            | 1477              | L = 60°            |  |
| 3 = 3000 °K                            | 1565              | S = 24°            |  |
| 4 = 4000 °K                            | 1635              | T = 12°            |  |

|  |                   |                    |  |
|--|-------------------|--------------------|--|
| IP20                                   |                   |                    |  |
| 220-240V                               | <b>18,5W</b>      | CRI>90             |  |
| <b>3P13.5</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | IGBT Triac         |  |
| <b>3P13A5</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | DALI               |  |
| <b>3P13G5</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | Push - 1...10V     |  |
| <b>Led color</b>                       | <i>Nominal lm</i> | <b>Beam spread</b> |  |
| 2 = 2700 °K                            | 2020              | L = 60°            |  |
| 3 = 3000 °K                            | 2140              | S = 24°            |  |
| 4 = 4000 °K                            | 2236              | T = 12°            |  |


|  |                   |                    |  |
|--|-------------------|--------------------|--|
| IP20                                   |                   |                    |  |
| 220-240V                               | <b>27W</b>        | CRI>90             |  |
| <b>3P13.6</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | on/off             |  |
| <b>3P13E6</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | DALI - Push        |  |
| <b>3P13C6</b> <input type="checkbox"/> |                   |                    |  |
|  |                   | 1...10V            |  |
| <b>Led color</b>                       | <i>Nominal lm</i> | <b>Beam spread</b> |  |
| 2 = 2700 °K                            | 2683              | L = 60°            |  |
| 3 = 3000 °K                            | 2842              | S = 24°            |  |
| 4 = 4000 °K                            | 2963              | T = 12°            |  |



Installation kit on beams and horizontal surfaces

**1KIT.P136.**


## Pop 14 Ø 3,0 for 230 voltage 3~ circuit Eutrac

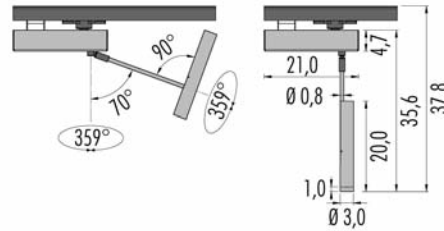

|  |       |
|--|-------|
| <input type="checkbox"/>               | Frame |
| 02 <input checked="" type="checkbox"/> | Black |
| 06 <input type="checkbox"/>            | White |

|  |            |             |        |
|--|------------|-------------|--------|
| IP20   | ©          | CE          | MC-E=3 |
| 220-240V   | 13,4W      | CRI>90      |        |
| 3P14.2 <input checked="" type="checkbox"/> M. <input type="checkbox"/> | on/off     |             |        |
| 4P14.2 <input checked="" type="checkbox"/> M. <input type="checkbox"/> | on/off     |             |        |
| <i>With honeycomb</i>  |            |             |        |
| <input checked="" type="checkbox"/> Led color                          | Nominal lm | Beam spread |        |
| 2 = 2700 °K  | 1650       | 35°         |        |
| 3 = 3000 °K  | 1727       |             |        |
| 4 = 4000 °K  | 1786       |             |        |

## Pop 14 Ø 7,0 for 230 voltage 3~ circuit Eutrac




|  |       |
|--|-------|
| <input type="checkbox"/>               | Frame |
| 02 <input checked="" type="checkbox"/> | Black |
| 06 <input type="checkbox"/>            | White |

|  |            |   |        |
|--|------------|---|--------|
| IP20   | Ⓢ          | CE  | MC-E=3 |
| 220-240V   | GU5.3 50W  | P=5,0   |        |
| 3P14.220. <input type="checkbox"/>                                     |            |   |        |
| IP20   | ©          | CE  | MC-E=3 |
| 220-240V   | 11W        | CRI>90  |        |
| 3P14.3 <input checked="" type="checkbox"/> M. <input type="checkbox"/> | IGBT Triac |   |        |
| 4P14.3 <input checked="" type="checkbox"/> M. <input type="checkbox"/> | IGBT Triac |   |        |
| <i>With honeycomb</i>  |            |   |        |
| <input checked="" type="checkbox"/> Led color                          | Nominal lm | <input checked="" type="checkbox"/> Beam spread |        |
| 2 = 2700 °K  | 1119       | M = 38° (P=0,5)                                 |        |
| 3 = 3000 °K  | 1257       | S = 22° (P=5,0)                                 |        |
| 4 = 4000 °K  | 1313       | T = 10° (P=0,5)                                 |        |

Pop 14 Ø 12,5 for 230 voltage 3~ circuit Eutrac



|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |



IP20 CE

220-240V **653** 50W

**3P14.530.** □

IP20 © CE MC-E=3

220-240V **18,5W** CRI>90

**3P14.5** ■▲□ IGBT Triac

|             |            |               |
|-------------|------------|---------------|
| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|

|             |      |         |
|-------------|------|---------|
| 2 = 2700 °K | 2020 | L = 60° |
|-------------|------|---------|

|             |      |         |
|-------------|------|---------|
| 3 = 3000 °K | 2140 | S = 24° |
|-------------|------|---------|

|             |      |         |
|-------------|------|---------|
| 4 = 4000 °K | 2236 | T = 12° |
|-------------|------|---------|

IP20 © CE MC-E=3

220-240V **27W** CRI>90

**3P14.6** ■▲□ on/off


|             |            |               |
|-------------|------------|---------------|
| ■ Led color | Nominal lm | ▲ Beam spread |
|-------------|------------|---------------|

|             |      |         |
|-------------|------|---------|
| 2 = 2700 °K | 2683 | L = 60° |
|-------------|------|---------|

|             |      |         |
|-------------|------|---------|
| 3 = 3000 °K | 2842 | S = 24° |
|-------------|------|---------|

|             |      |         |
|-------------|------|---------|
| 4 = 4000 °K | 2963 | T = 12° |
|-------------|------|---------|

## Pop 15 $\varnothing 3,0$ for 48V track Eutrac




|  |       |
|--|-------|
| <input type="checkbox"/>               | Frame |
| 02 <input checked="" type="checkbox"/> | Black |
| 06 <input type="checkbox"/>            | White |

|   |   |             |  |        |
|---|---|-------------|--|--------|
| IP20  |   | CE          |  | MC-E=3 |
| 48V   | 13,4W   | CRI>90      |  |        |
| 3P15.2  | <input checked="" type="checkbox"/> M. <input type="checkbox"/> | on/off      |  |        |
| 4P15.2  | <input checked="" type="checkbox"/> M. <input type="checkbox"/> | on/off      |  |        |
| <i>With honeycomb</i>                         |   |             |  |        |
| <input checked="" type="checkbox"/> Led color | Nominal lm  | Beam spread |  |        |
| 2 = 2700 °K                                   | 1650  | 35°         |  |        |
| 3 = 3000 °K                                   | 1727  |             |  |        |
| 4 = 4000 °K                                   | 1786  |             |  |        |

Electronic Gear in remote position  
Dimmable on demand

|                     |                |
|---------------------|----------------|
| <b>3KIT.048.120</b> | on/off 0 ~ 5A  |
| <b>3KIT.048.240</b> | on/off 0 ~ 10A |

## Pop 15 $\varnothing 7,0$ for 48V track Eutrac



|  |       |
|--|-------|
| <input type="checkbox"/>               | Frame |
| 02 <input checked="" type="checkbox"/> | Black |
| 06 <input type="checkbox"/>            | White |

|   |  |                 |  |        |
|---|--|-----------------|--|--------|
| IP20  |  | CE              |  | MC-E=3 |
| 48V   | 11W  | CRI>90          |  |        |
| 3P15.3  | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | on/off          |  |        |
| 4P15.3  | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | on/off          |  |        |
| <i>With honeycomb</i>                         |  |                 |  |        |
| <input checked="" type="checkbox"/> Led color | Nominal lm   | Beam spread     |  |        |
| 2 = 2700 °K                                   | 1119   | M = 38° (P=0,5) |  |        |
| 3 = 3000 °K                                   | 1257   | S = 22° (P=5,0) |  |        |
| 4 = 4000 °K                                   | 1313   | T = 10° (P=0,5) |  |        |


Electronic Gear in remote position  
Dimmable on demand

|                     |                |
|---------------------|----------------|
| <b>3KIT.048.120</b> | on/off 0 ~ 5A  |
| <b>3KIT.048.240</b> | on/off 0 ~ 10A |

# Pop 15 Ø 12,5 for 48V track Eutrac



- Frame
- 
- 02 ● Black
- 06 ○ White

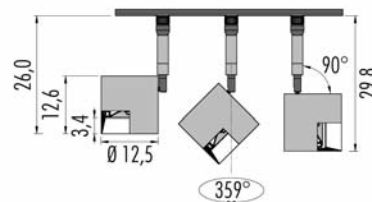

IP20 ⓘ CE ▽ MC-E=3

48V **18,5W** CRI>90

**3P15.5** ■▲.□ on/off

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2020       | L = 60°     |
| 3 = 3000 °K | 2140       | S = 24°     |
| 4 = 4000 °K | 2236       | T = 12°     |

IP20 ⓘ

CE ▽ MC-E=3

48V **27W** CRI>90

**3P15.6** ■▲.□ on/off

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2683       | L = 60°     |
| 3 = 3000 °K | 2842       | S = 24°     |
| 4 = 4000 °K | 2963       | T = 12°     |



Electronic Gear in remote position  
Dimmable on demand

**3KIT.048.120** on/off 0 ~ 5A

**3KIT.048.240** on/off 0 ~ 10A




Pop P16 Pull 16,0 h. for 230 voltage 3~ circuit Eutrac



Frame

02  Black

06  White

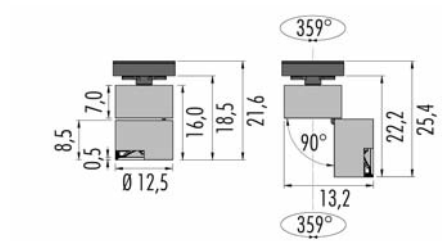

IP20 ©

220-240V

**3P16P. 5**   IGBT Triac

2 = 2700 °K

3 = 3000 °K

4 = 4000 °K

Nominal lm

2683

2842

2963

CE  MC-E=3

CRI>90

Beam spread

L = 60°

S = 24°

T = 12°


Pop P16 Pull 21,0 h. for 230 voltage 3~ circuit Eutrac



□ Frame

02 ● Black

06 ○ White

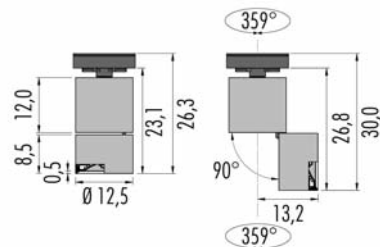

IP20

CE

220-240V **653** lx50W

**3P16P.530.**□

IP20

CE

MC-E-3

220-240V **23W**

CRI>90

**3P16P.6** on/off

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

2228

L = 60°

3 = 3000 °K

2357




S = 24°

4 = 4000 °K


2455

T = 12°


*Lighting track 230V 3-CCT and accessories*

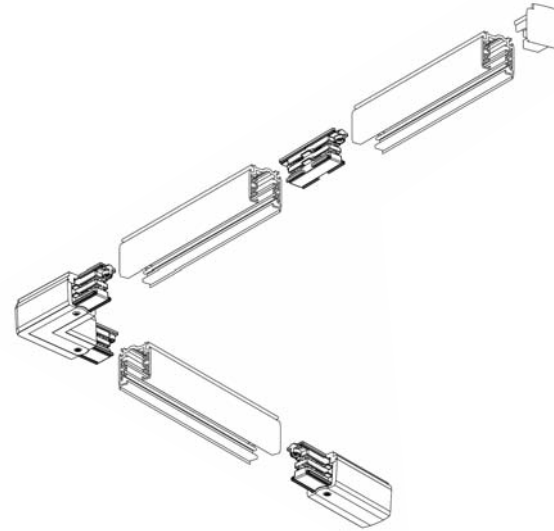


Supply connector earth conductor on right  
**1R-555112011 White**  
**1R-555112012 Black**




Supply connector earth conductor on left  
**1R-555112021 White**  
**1R-555112022 Black**




Lighting track 3-CCT aluminium  
 length 1000 mm  
**1R-25101 White**  
**1R-25102 Black**




Lighting track 3-CCT aluminium  
 length 2000 mm  
**1R-25201 White**  
**1R-25202 Black**




Lighting track 3-CCT aluminium  
 length 3000 mm  
**1R-25301 White**  
**1R-25302 Black**




Concealed coupling with wiring  
**1R-555112061 White**  
**1R-555112062 Black**



L-shaped coupling ground external  
**1R-555112091 White**  
**1R-555112092 Black**



L-shaped coupling ground internal  
**1R-555112101 White**  
**1R-555112102 Black**





Flexible coupling  
**1R-555112111 White**  
**1R-555112112 Black**



End cap  
**1R-555012171 White**  
**1R-555012172 Black**

*Low-voltage Led track 48V and accessories*




*Supply connector earth conductor on right*

**1R-556242011** *White*  
**1R-556242012** *Black*




*Supply connector earth conductor on left*

**1R-556242021** *White*  
**1R-556242022** *Black*



*Lighting track aluminium  
length 2000 mm*

**1R-556241021** *White*  
**1R-556241022** *Black*




*Lighting track aluminium  
length 3000 mm*

**1R-556241031** *White*  
**1R-556241032** *Black*



*Straight coupler*


**1R-556242061** *White*  
**1R-556242062** *Black*



*End cap*

**1R-556042171** *White*  
**1R-556042172** *Black*

Pop P30 Sun Static 




|             |                             |                |        |
|-------------|-----------------------------|----------------|--------|
| IP20        | ©                           | CE             | MC-E=3 |
| 220-240V    | 18,1W                       | CRI>90         |        |
| 3P30S.6     | L. <input type="checkbox"/> | IGBT Triac     |        |
| 3P30SA6     | L. <input type="checkbox"/> | DALI           |        |
| 3P30SG6     | L. <input type="checkbox"/> | Push - 1...10V |        |
| ■ Led color | Nominal lm                  | ▲ Beam spread  |        |
| 2 = 2700 °K | 2494                        | 60°            |        |
| 3 = 3000 °K | 2611                        |                |        |
| 4 = 4000 °K | 2697                        |                |        |

- Frame
- 02 ● Black
- 06 ○ White



Pop P30 Sun Pull **ROS**

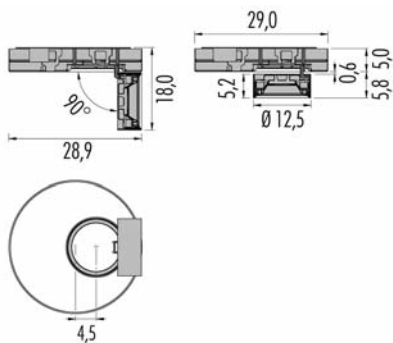


|                |                |               |        |
|----------------|----------------|---------------|--------|
| IP20           | ©              | CE            | MC-E=3 |
| 220-240V       | 12,3W          | CRI>90        |        |
| <b>3P30P.5</b> | IGBT Triac     |               |        |
| <b>3P30PA5</b> | DALI           |               |        |
| <b>3P30PG5</b> | Push - 1...10V |               |        |
| ■ Led color    | Nominal lm     | ▲ Beam spread |        |
| 2 = 2700°K     | 1792           | L = 80°       |        |
| 3 = 3000°K     | 1876           | M = 32°       |        |
| 4 = 4000°K     | 1938           | S = 24°       |        |


|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |

*Pop Host* Ø 32,0 mono-color **New**



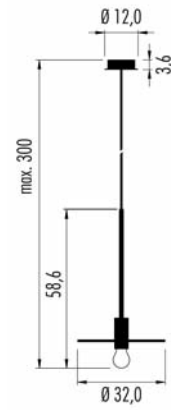


|                   |                   |             |
|-------------------|-------------------|-------------|
| IP20              |                   | CE          |
| 220-240V          | e27 7W            | CRI>80      |
| <b>3H32C.12L.</b> | dim. IGBT - Triac |             |
| Led color         | Nominal lm        | Beam spread |
| 2700°K            | 806               | 180°        |

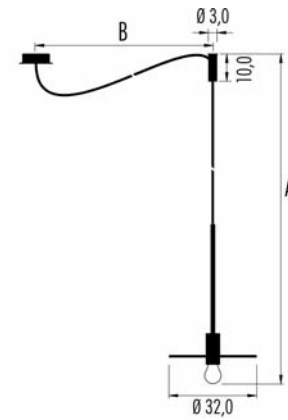

|                   |                   |             |
|-------------------|-------------------|-------------|
| IP20              | <b>A+B=390cm</b>  | CE          |
| 220-240V          | e27 7W            | CRI>80      |
| <b>3H32D.12L.</b> | dim. IGBT - Triac |             |
| Led color         | Nominal lm        | Beam spread |
| 2700°K            | 806               | 180°        |


|                          |       |               |            |       |
|--------------------------|-------|---------------|------------|-------|
| <input type="checkbox"/> | Frame | Bulb          | CUP canopy | cable |
| 06                       | White | Mirror Chrome | White      | White |

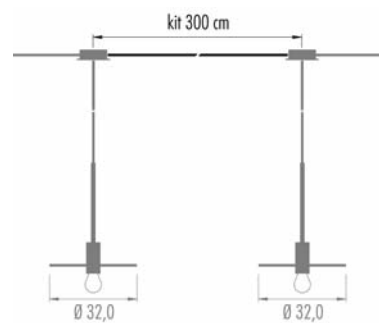


Kit Cable for Host composition: H32C

**1KIT.300.06** White



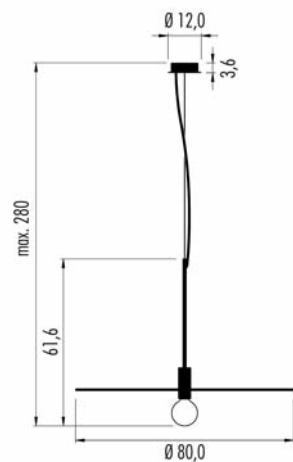


|                   |                   |                    |   |
|-------------------|-------------------|--------------------|---|
| IP20              | Ⓛ                 | CE                 | ∇ |
| 220-240V          | e27 7W            | CRI>80             |   |
| <b>3H80C.12L.</b> | □                 | dimm. IGBT - Triac |   |
| <i>Led color</i>  | <i>Nominal lm</i> | <i>Beam spread</i> |   |
| 2700°K            | 806               | 180°               |   |

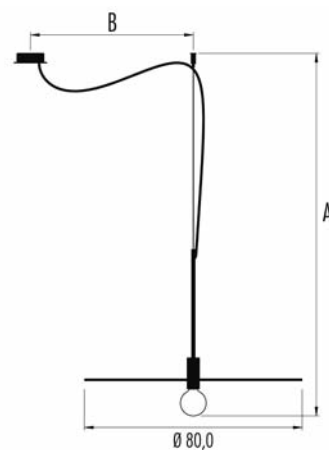

|                   |                   |                    |    |   |
|-------------------|-------------------|--------------------|----|---|
| IP20              | Ⓛ                 | A+B=390cm          | CE | ∇ |
| 220-240V          | e27 7W            | CRI>80             |    |   |
| <b>3H80D.12L.</b> | □                 | dimm. IGBT - Triac |    |   |
| <i>Led color</i>  | <i>Nominal lm</i> | <i>Beam spread</i> |    |   |
| 2700°K            | 806               | 180°               |    |   |

| □  | Frame   | Bulb            | CUP canopy | cable |
|----|---------|-----------------|------------|-------|
| 06 | ○ White | ● Mirror Chrome | White      | White |

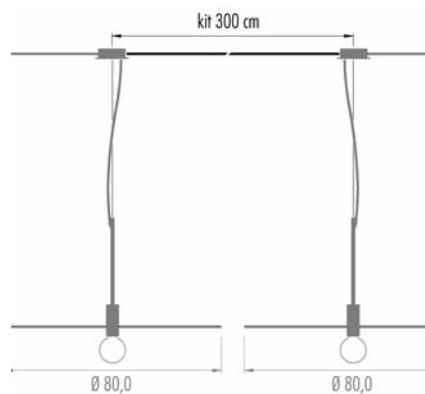


|   |       |
|---|-------|
| <i>Kit Cable for Host composition: H80C</i> |       |
| <b>1KIT.300.06</b>                          | White |

*Pop Host* Ø 80,0 mono-color **New**




*Pop Host* Ø 32,0 bi-color



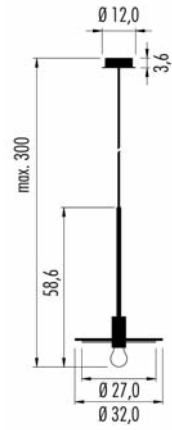


|                   |                          |              |   |
|-------------------|--------------------------|--------------|---|
| IP20              | Ⓛ                        | CE           | ▽ |
| 220-240V          | e27 7W                   | CRI>80       |   |
| <b>3H32C.12L.</b> | <input type="checkbox"/> | IGBT - Triac |   |
| Led color         | Nominal lm               | Beam spread  |   |
| 2700 °K           | 806                      | 180°         |   |

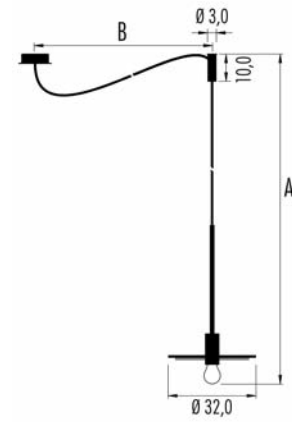

|                   |                          |              |    |   |
|-------------------|--------------------------|--------------|----|---|
| IP20              | Ⓛ                        | A+B=390cm    | CE | ▽ |
| 220-240V          | e27 7W                   | CRI>80       |    |   |
| <b>3H32D.12L.</b> | <input type="checkbox"/> | IGBT - Triac |    |   |
| Led color         | Nominal lm               | Beam spread  |    |   |
| 2700 °K           | 806                      | 180°         |    |   |


| <input type="checkbox"/> | Up | Down | Canopy      | cable       | Bulb           |
|--------------------------|----|------|-------------|-------------|----------------|
| KS                       | ●  | ●    | Black/Brass | Black Brass | ● Mirror Brass |
| WS                       | ○  | ●    | White/Brass | White Brass | ● Mirror Brass |
| BS                       | ●  | ●    | Blue/Brass  | Blue Brass  | ● Mirror Brass |
| GS                       | ●  | ●    | Green/Brass | Green Brass | ● Mirror Brass |
| PS                       | ●  | ●    | Rose/Brass  | Rose Brass  | ● Mirror Brass |
| RS                       | ●  | ●    | Red/Brass   | Red Brass   | ● Mirror Brass |

Time delivery: 25 Working Days

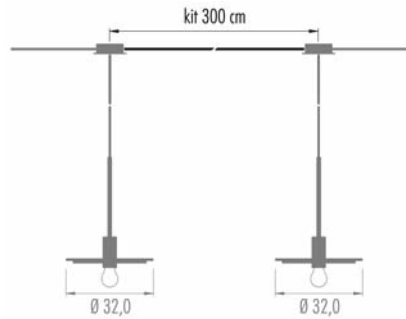


Kit Cable for Host composition: H32C

**1KIT.300.S** Brass

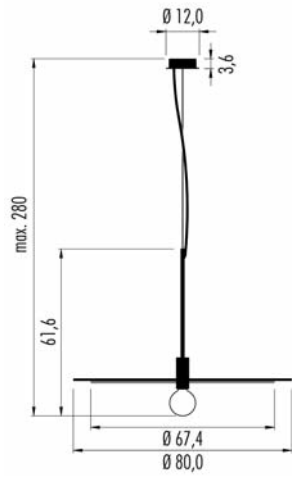


|                   |                   |                    |   |
|-------------------|-------------------|--------------------|---|
| IP20              | Ⓛ                 | CE                 | ▽ |
| 220-240V          | e27 7W            | CRI>80             |   |
| <b>3H80C.12L.</b> | □                 | IGBT - Triac       |   |
| <i>Led color</i>  | <i>Nominal lm</i> | <i>Beam spread</i> |   |
| 2700 °K           | 806               | 180°               |   |

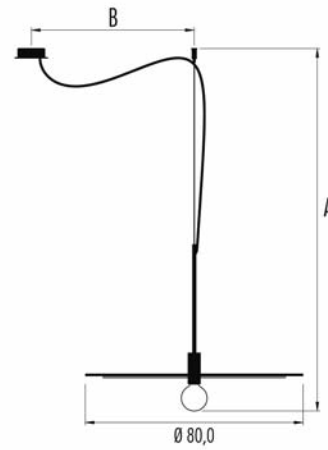

|                   |                   |                    |    |   |
|-------------------|-------------------|--------------------|----|---|
| IP20              | Ⓛ                 | A+B=390cm          | CE | ▽ |
| 220-240V          | e27 7W            | CRI>80             |    |   |
| <b>3H80D.12L.</b> | □                 | IGBT - Triac       |    |   |
| <i>Led color</i>  | <i>Nominal lm</i> | <i>Beam spread</i> |    |   |
| 2700 °K           | 806               | 180°               |    |   |

| □  | Up | Down | Diffuser color | CUP   | cable | Bulb           |
|----|----|------|----------------|-------|-------|----------------|
| KS | ●  | ●    | Black/Brass    | Black | Brass | ● Mirror Brass |
| WS | ○  | ●    | White/Brass    | White | Brass | ● Mirror Brass |
| BS | ●  | ●    | Blue/Brass     | Blue  | Brass | ● Mirror Brass |
| GS | ●  | ●    | Green/Brass    | Green | Brass | ● Mirror Brass |
| PS | ●  | ●    | Rose/Brass     | Rose  | Brass | ● Mirror Brass |
| RS | ●  | ●    | Red/Brass      | Red   | Brass | ● Mirror Brass |

Time delivery: 25 Working Days

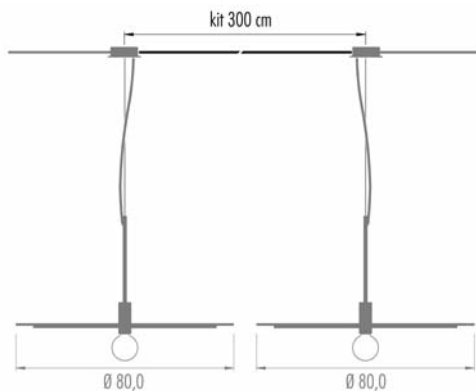


Kit Cable for Host composition: H80C

**1KIT.300.S** Brass

*Pop Host* Ø 80,0 bi-color



# Pop Host - W - wall/ceiling bi-color

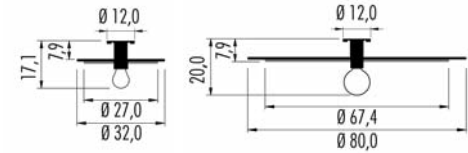

IP20

220-240V

e27 7W CRI>80 IGBT - Triac

**3H32W.12L.**  Ø 32cm

**3H80W.12L.**  Ø 80cm

Led color

Nominal lm

Beam spread

2700 °K

806

180°

| <input type="checkbox"/> | Up | Down | Diffuser color | Bulb |              |
|--------------------------|----|------|----------------|------|--------------|
| KS                       |    |      | Black/Brass    |      | Mirror Brass |
| WS                       |    |      | White/Brass    |      | Mirror Brass |
| BS                       |    |      | Blue/Brass     |      | Mirror Brass |
| GS                       |    |      | Green/Brass    |      | Mirror Brass |
| PS                       |    |      | Rose/Brass     |      | Mirror Brass |
| RS                       |    |      | Red/Brass      |      | Mirror Brass |


Time delivery: 25 Working Days





*Pop Host L/M - T/N bi-color*






IP20 **A= max. 140cm**

220-240V e27 7W CRI>80

**3H32N.12L.** dim. IGBT - Triac

|                  |                   |                    |
|------------------|-------------------|--------------------|
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |
| 2700 °K          | 806               | 180°               |

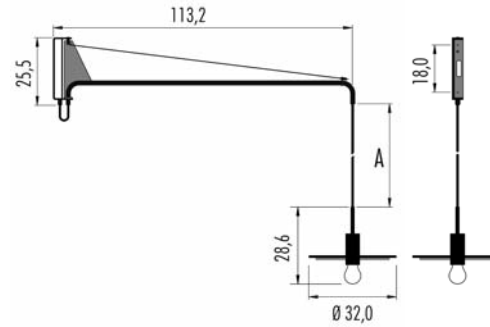


IP20 **A= max. 130cm**

220-240V e27 7W CRI>80

**3H32M.12L.** dim. IGBT - Triac

|                  |                   |                    |
|------------------|-------------------|--------------------|
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |
| 2700 °K          | 806               | 180°               |

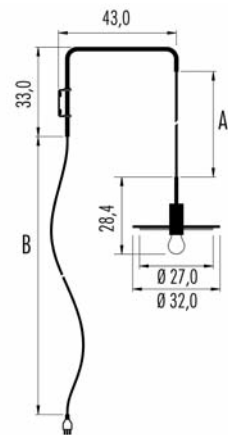


IP20 **A+B=360cm**

220-240V e27 7W CRI>80

**3H32T.12L.** dim. IGBT - Triac

|                  |                   |                    |
|------------------|-------------------|--------------------|
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |
| 2700 °K          | 806               | 180°               |

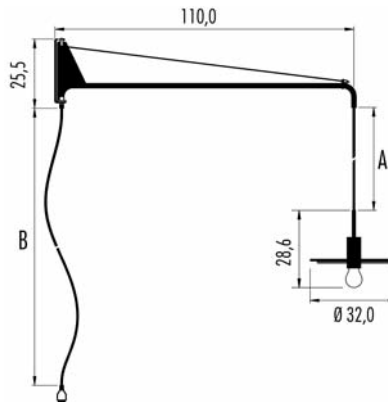

IP20 **A+B=300cm**

220-240V e27 7W CRI>80

**3H32L.12L.** dim. IGBT - Triac


|                  |                   |                    |
|------------------|-------------------|--------------------|
| <i>Led color</i> | <i>Nominal lm</i> | <i>Beam spread</i> |
| 2700 °K          | 806               | 180°               |

| <input type="checkbox"/> | Up | Down | Diffuser color | Bulb |
|--------------------------|----|------|----------------|------|
| KS                       |    |      | Black/Brass    |      |
| WS                       |    |      | White/Brass    |      |
| BS                       |    |      | Blue/Brass     |      |
| GS                       |    |      | Green/Brass    |      |
| PS                       |    |      | Rose/Brass     |      |
| RS                       |    |      | Red/Brass      |      |

*Time delivery: 25 Working Days*

*Pop P40 Chandelier*



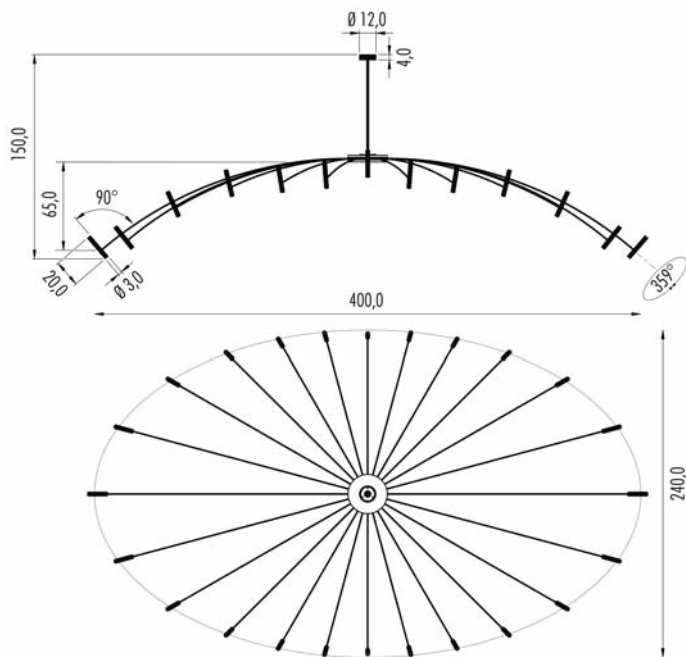

|             |            |             |
|-------------|------------|-------------|
| IP20        | MC-E=3     | CE          |
| 220-240V    | 24x13,4W   | CRI>90      |
| 3P40A.1     | M.02       |             |
| 3P40A.1     | M.06       |             |
| 3P40A.1     | M.B        |             |
| 3P40A.1     | M.C        |             |
| 3P40A.1     | M.G        |             |
| 3P40A.1     | M.P        |             |
| 3P40A.1     | M.R        |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 24 x 1650  | M = 35°     |
| 3 = 3000 °K | 24 x 1727  |             |

**3DRV.024.DIM** DALI - Push - 1...10V  
Remote installation: need 2 units

|             |            |             |
|-------------|------------|-------------|
| IP20        | MC-E=3     | CE          |
| 220-240V    | 24x13,4W   | CRI>90      |
| 3P40B.1     | M.02       |             |
| 3P40B.1     | M.06       |             |
| 3P40B.1     | M.B        |             |
| 3P40B.1     | M.C        |             |
| 3P40B.1     | M.G        |             |
| 3P40B.1     | M.P        |             |
| 3P40B.1     | M.R        |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 24 x 1650  | M = 35°     |
| 3 = 3000 °K | 24 x 1727  |             |



**3DRV.024.DIM** DALI - Push - 1...10V  
Remote installation: need 2 units

|             |            |             |
|-------------|------------|-------------|
| IP20        | MC-E=3     | CE          |
| 220-240V    | 24x13,4W   | CRI>90      |
| 3P40R.1     | M.02       |             |
| 3P40R.1     | M.06       |             |
| 3P40R.1     | M.B        |             |
| 3P40R.1     | M.C        |             |
| 3P40R.1     | M.G        |             |
| 3P40R.1     | M.P        |             |
| 3P40R.1     | M.R        |             |
| ■ Led color | Nominal lm | Beam spread |
| 2 = 2700 °K | 24 x 1650  | M = 35°     |
| 3 = 3000 °K | 24 x 1727  |             |

**3DRV.024.DIM** DALI - Push - 1...10V  
Remote installation: need 2 units

|    |        |
|----|--------|
| □  | Frame  |
| 02 | Black  |
| 06 | White  |
| B  | Blue   |
| C  | Copper |
| G  | Green  |
| P  | Rose   |
| R  | Red    |

Time delivery: 30 Working days

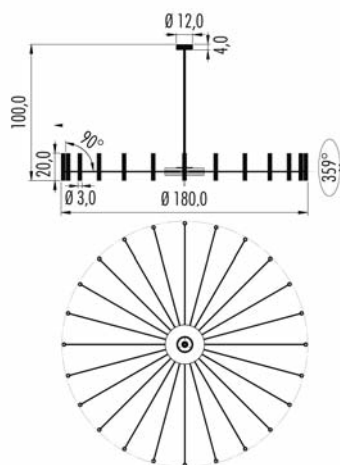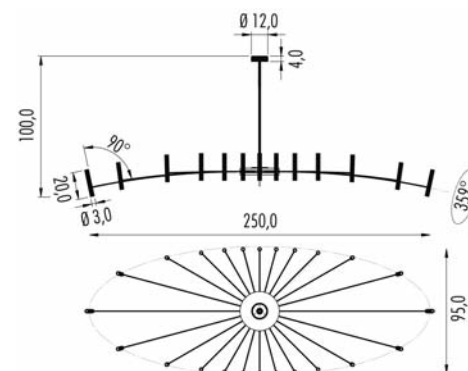


Ⓢ Two given electronic gears (remote installation) for double switching on (alternating mode).

Die zwei gegebenen Netzgeräte (separat einzubauen) einstellen die Doppelzündung der Strahler (abwechselnd).

Les deux transformateurs fournis (à positionner en retrait) commandent un double allumage des sources lumineuses (1/2 d'une part, 1/2 d'autre part).

Los dos transformadores suministrados (a instalar de forma remota) permiten el doble encendido de la lámpara (cuyos brazos lo hacen de manera alterna).

# P50 Pinocchio




|          |           |            |                |   |
|----------|-----------|------------|----------------|---|
| IP20     | ©         | MC-E=3     | CE             | ▽ |
| 100-240V |           | 6W CRI>90  | dimmable       |   |
| 4P50.2   | ■         | M.02       | With honeycomb |   |
| 4P50.2   | ■         | M.06       | With honeycomb |   |
| 4P50.2   | ■         | M.B        | With honeycomb |   |
| 4P50.2   | ■         | M.C        | With honeycomb |   |
| 4P50.2   | ■         | M.G        | With honeycomb |   |
| 4P50.2   | ■         | M.P        | With honeycomb |   |
| 4P50.2   | ■         | M.R        | With honeycomb |   |
| ■        | Led color | Nominal lm | Beam spread    |   |
| 2        | 2700 °K   | 824        | 35°            |   |
| 3        | 3000 °K   | 861        |                |   |
| 4        | 4000 °K   | 888        |                |   |

|    |          |
|----|----------|
| □  | Frame    |
| 02 | ● Black  |
| 06 | ○ White  |
| B  | ● Blue   |
| C  | ● Copper |
| G  | ● Green  |
| P  | ● Rose   |
| R  | ● Red    |

Time delivery: 25 Working days

## P55 Pinocchio

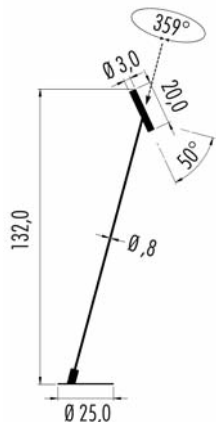

|          |           |            |                |   |
|----------|-----------|------------|----------------|---|
| IP20     | ©         | MC-E=3     | CE             | ▽ |
| 100-240V |           | 6W CRI>90  | dimmable       |   |
| 4P55.2   | ■         | M.02       | With honeycomb |   |
| 4P55.2   | ■         | M.06       | With honeycomb |   |
| 4P55.2   | ■         | M.B        | With honeycomb |   |
| 4P55.2   | ■         | M.C        | With honeycomb |   |
| 4P55.2   | ■         | M.G        | With honeycomb |   |
| 4P55.2   | ■         | M.P        | With honeycomb |   |
| 4P55.2   | ■         | M.R        | With honeycomb |   |
| ■        | Led color | Nominal lm | Beam spread    |   |
| 2        | = 2700°K  | 824        | 35°            |   |
| 3        | = 3000°K  | 861        |                |   |
| 4        | = 4000°K  | 888        |                |   |


|    |          |
|----|----------|
| □  | Frame    |
| 02 | ● Black  |
| 06 | ○ White  |
| B  | ● Blue   |
| C  | ● Copper |
| G  | ● Green  |
| P  | ● Rose   |
| R  | ● Red    |

Time delivery: 25 Working days



*Pop P120 - P200*



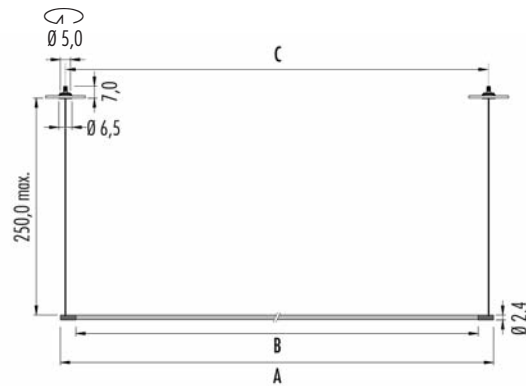

**Pop P120** *ARC recessed canopy for plasterboard ceiling*

IP20 ⓘ CE ▽ Ⓢ

220-240V 26W CRI>85

**3PA1.43L** □

A = 124cm B = 108,4cm C = 119cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2350       | 106°        |

**Pop P200** *ARC recessed canopy for plasterboard ceiling*

IP20 ⓘ CE ▽ Ⓢ

220-240V 43W CRI>85

**3PA2.43L** □

A = 196cm B = 180,4cm C = 191cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 3915       | 106°        |


*Electronic gear has to be placed in a remote position*

**3KIT.024.DIM**

Dimmable option:  
DALI - Push - 1...10V  
Remote installation - need 1 unit to order

| □    | Frame | ARC canopy | CUP canopy | Cable |
|------|-------|------------|------------|-------|
| 02 ● | Black | White      | Black      | Black |
| 06 ○ | White | White      | White      | White |

*Time delivery: 25 Working Days*

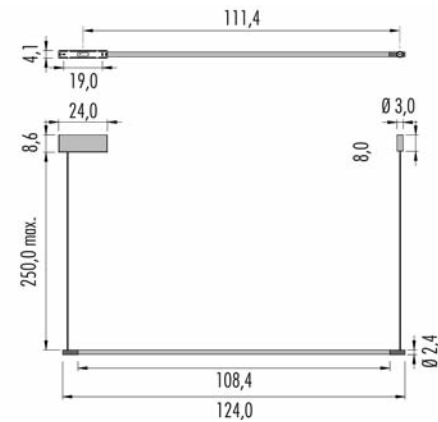


**Pop P120** *CUP external canopy*

IP20 ⓘ CE ▽ Ⓢ

220-240V 26W CRI>85

**3PC1.43L** □ on/off

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2350       | 106°        |

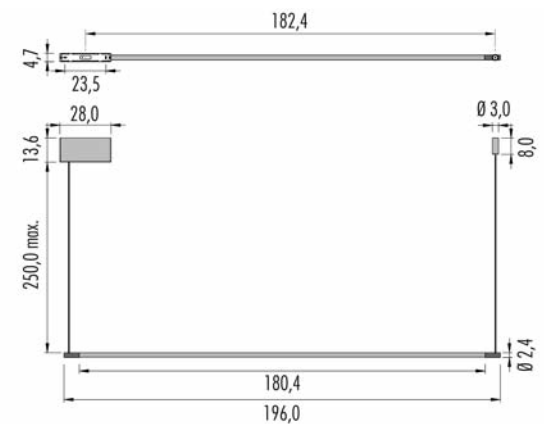

**Pop P200** *CUP external canopy*

IP20 ⓘ CE ▽ Ⓢ

220-240V 43W CRI>85


**3PC2.43L** □ on/off

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 3915       | 106°        |



*Pop P122 - P202 Brooklyn*



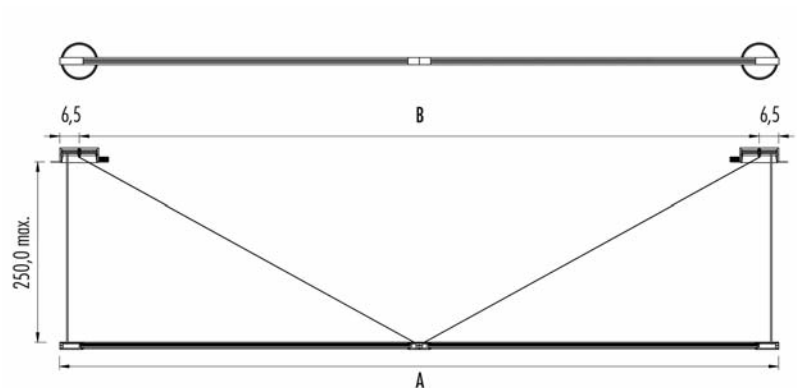

### Pop P122 **ARC** recessed canopy for plasterboard ceiling

IP20 ⓘ CE ▽ Ⓢ

220-240V 2x26W CRI>85

**3P122.43L.□**

A = 240cm B = 227cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2x2350     | 106°        |

**3KIT.024.DIM**

Dimmable option:  
DALI - Push - 1...10V  
Remote installation - need 2 units to order

### Pop P202 **ARC** recessed canopy for plasterboard ceiling

IP20 ⓘ CE ▽ Ⓢ

220-240V 2x43W CRI>85

**3P202.43L.□**

A = 384cm B = 371cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2x3915     | 106°        |

**3KIT.024.DIM**

Dimmable option:  
DALI - Push - 1...10V  
Remote installation - need 2 units to order

Housing for plasterboard  Ø 14,0cm

**1Z00.120.01 ● x2** each


Housing for brickwork

**1M00.120.01 ● x2** each

| □           | Frame | ARC canopy | CUP canopy | cable |
|-------------|-------|------------|------------|-------|
| <b>02 ●</b> | Black | White      | Black      | Black |
| <b>06 ○</b> | White | White      | White      | White |

Time delivery: 25 Working Days

# Pop P123 - P203

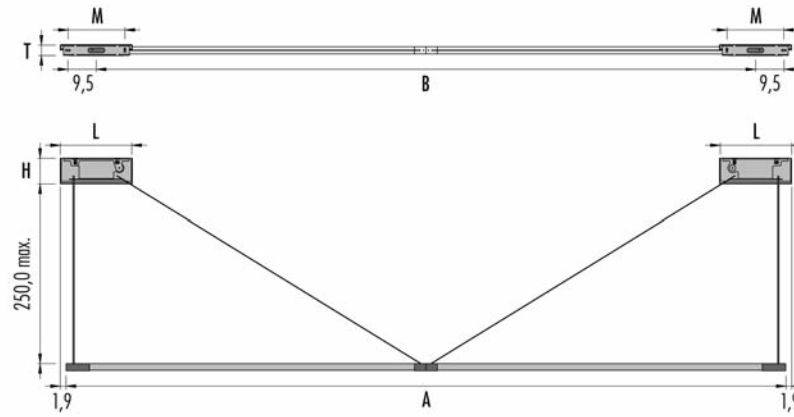

## Pop P123 **CUP** external canopy

IP20

CE

220-240V

2x26W

CRI>85

**3P123.43L** on/off

A = 240cm B = 219,8cm

L = 24,0cm H = 8,6cm T = 4,1cm M = 19,0cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2x2350     | 106°        |

## Pop P203 **CUP** external canopy

IP20

CE

220-240V

2x43W

CRI>85

**3P203.43L** on/off

A = 384cm B = 363,8cm

L = 28,0cm H = 13,6cm T = 4,7cm M = 23,5cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 2x3915     | 106°        |


|    | Frame | ARC canopy | CUP canopy | cable |
|----|-------|------------|------------|-------|
| 02 | Black | White      | Black      | Black |
| 06 | White | White      | White      | White |

Time delivery: 25 Working Days



*Pop Up 1 wall*





|                    |                                      |
|--------------------|--------------------------------------|
| IP20 ⓘ             | CE ⚠                                 |
| 220-240V           | 17W CRI>85 on/off                    |
| <b>3PU1.43L.02</b> | .....                                |
| <b>3PU1.43L.06</b> | .....                                |
| <b>3PU1.43L.CB</b> | .....                                |
| <b>3PU1.43L.CR</b> | .....                                |
| <i>Led color</i>   | <i>Nominal lm</i> <i>Beam spread</i> |
| <b>3 = 3000 °K</b> | <b>1794</b> <b>L = 106°</b>          |

*Electronic gear has to be placed in a remote position*


**3KIT.024.DIM**

Dimmable option:  
DALI - Push - 1...10V  
Remote installation

|           | Frame    | Plate   |
|-----------|----------|---------|
| <b>02</b> | ● Black  | ● Black |
| <b>06</b> | ○ White  | ○ White |
| <b>CB</b> | ● Copper | ● Blue  |
| <b>CR</b> | ● Copper | ● Red   |

*Time delivery: 25 Working days*

# Pop Up 207

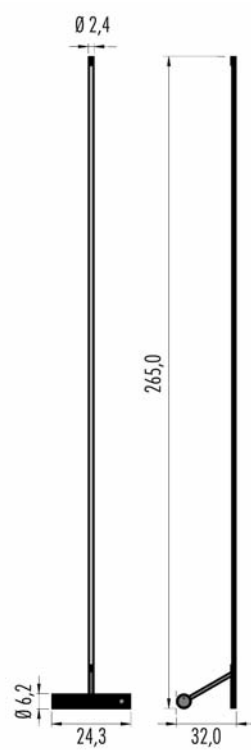

|          |     |        |   |
|----------|-----|--------|---|
| IP20     | ⓘ   | CE     | ▽ |
| 220-240V | 58W | CRI>85 |   |

**3P207.A3L.**  on/off  
 X wired for switch controlled socket CEI 3-23

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 5285       | 106°        |

|          |     |        |   |
|----------|-----|--------|---|
| IP20     | ⓘ   | CE     | ▽ |
| 220-240V | 58W | CRI>85 |   |

**3P207.B3L.**  on/off  
 Switch on power supply cable



| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 5285       | 106°        |

|                          |         |
|--------------------------|---------|
| <input type="checkbox"/> | Frame   |
| 02                       | ● Black |
| 06                       | ○ White |





# Tim T01

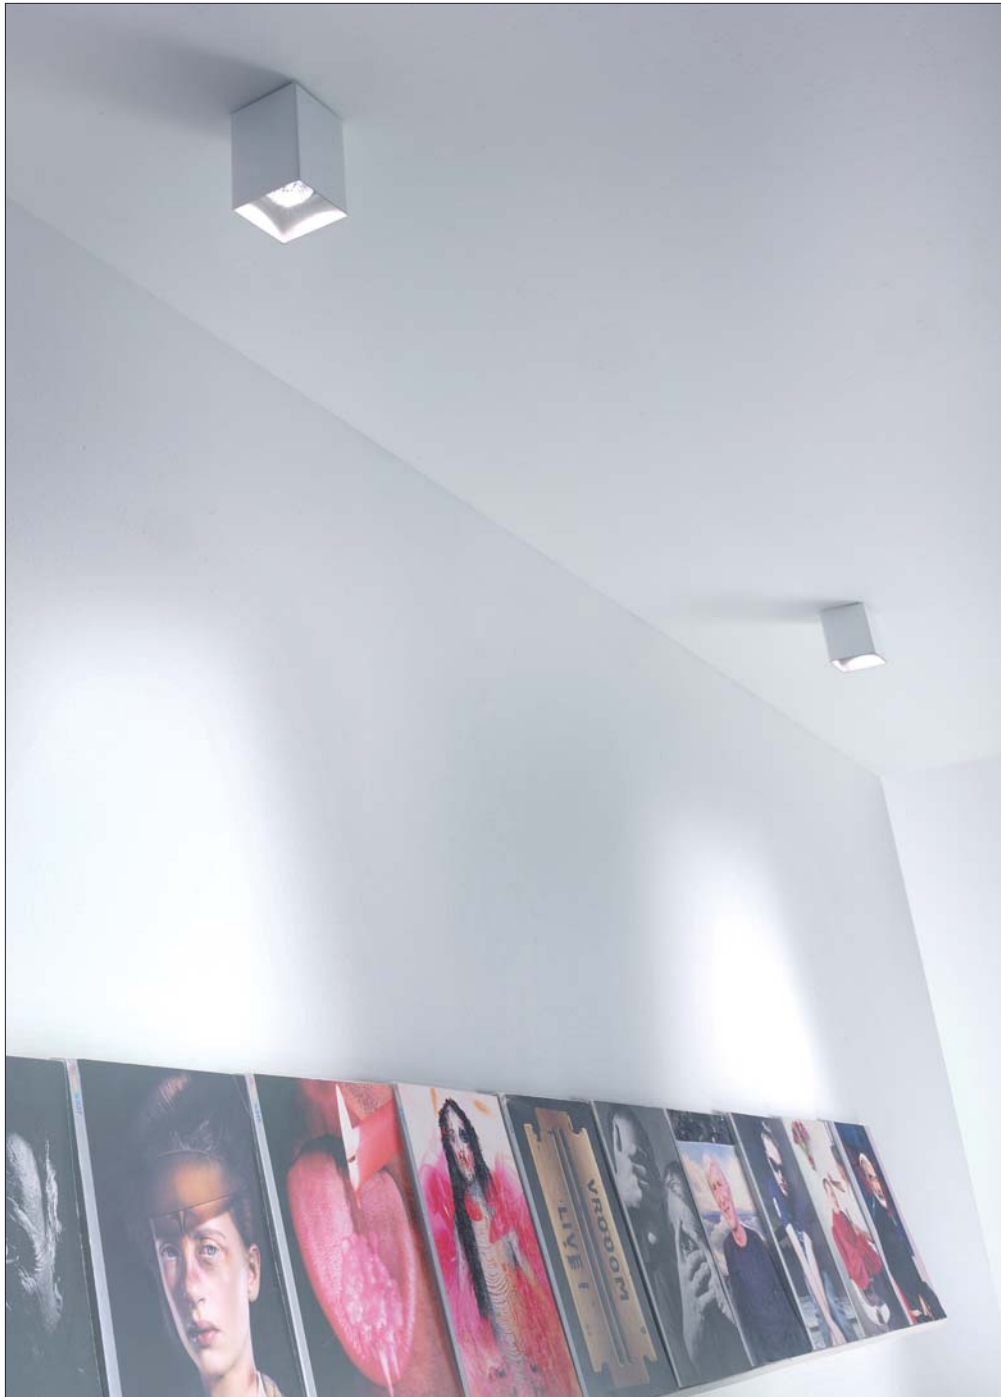


IP20

220-240V GU10 max50W

**3T01.210.02**

**3T01.210.04**

**3T01.210.06**



IP20 dimmable IGBT

220-240V led 13W CRI>85

**3T01.335.02**

**3T01.335.06**

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 1010       | 70°         |


Frame

**02** Black

**04** Brushed steel

**06** White

# Tim T13




IP20

220-240V GU10 max 3x50W

**3T13.210.02**

**3T13.210.04**

**3T13.210.06**



IP20 dimmable IGBT

220-240V led 13W CRI>85

**3T13.33S.02**

**3T13.33S.06**

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000 °K   | 1010       | 70°         |


Frame

**02** Black

**04** Brushed steel

**06** White

# Tim T02

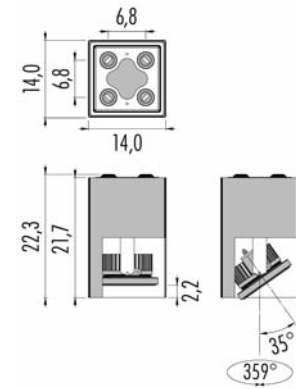

IP20 ©

CE ▼ MC-E-3

220-240V

27W

CRI>90

3T02.6  on/off

3T02A6  DALI

3T02B6  Push

3T02C6  1...10V

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

2683

L = 60°

3 = 3000 °K

2842

S = 24°

4 = 4000 °K

2963

T = 12°

IP20 ⓘ

CE ▼

220-240V

653 1x50W



3T02.535

Frame

02  Black

06  White

# Tim T03

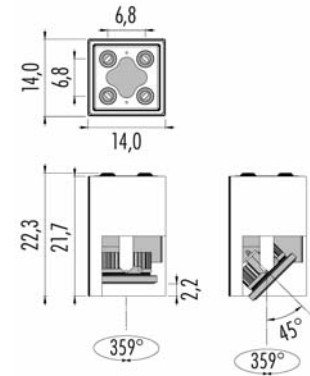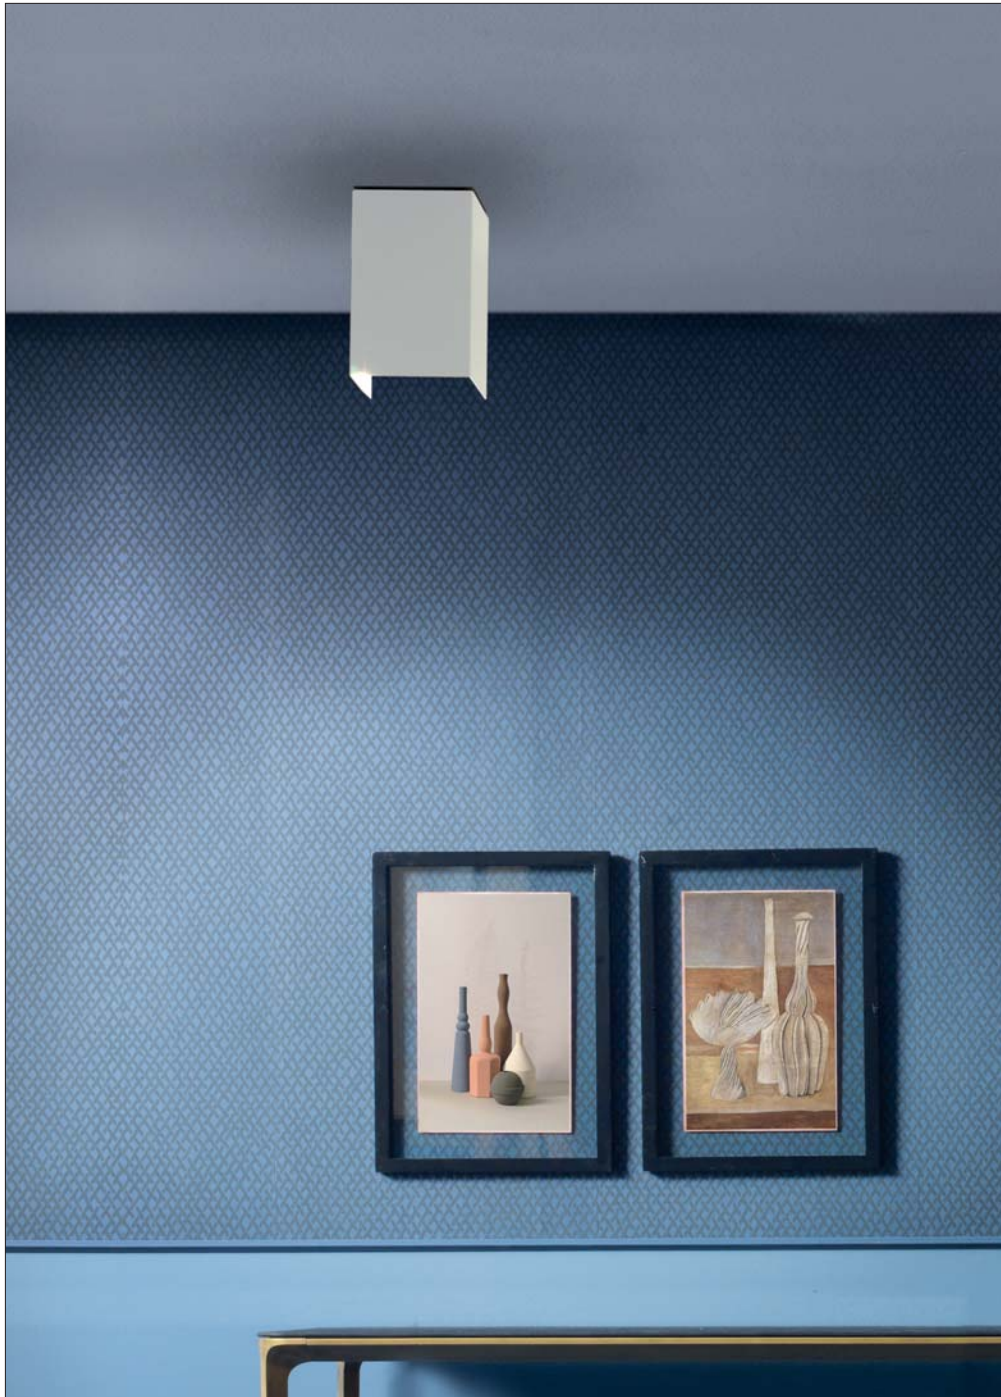

IP20 ©

CE ▼ MC-E-3

220-240V

27W

CRI>90

3T03.6  on/off

3T03A6  DALI

3T03B6  Push

3T03C6  1...10V

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

2683

L = 60°

3 = 3000 °K

2842

S = 24°

4 = 4000 °K

2963

T = 12°

IP20 ⓘ

CE ▼

220-240V

G53 1x50W


3T03.535

Frame

02 ● Black

06 ○ White

# Tim T22

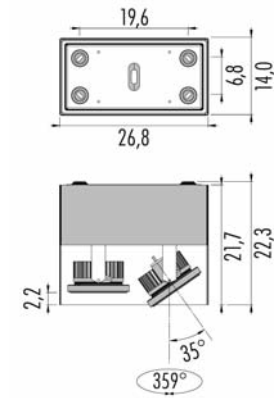

IP20 © CE ▽ MC-E=3

220-240V 2x27W CRI>90

3T22.6  on/off

3T22A6  DALI

3T22B6  Push

3T22C6  1...10V

| ■ Led color | Nominal lm | ▽ Beam spread |
|-------------|------------|---------------|
| 2 = 2700 °K | 2x2683     | L = 60°       |
| 3 = 3000 °K | 2x2842     | S = 24°       |
| 4 = 4000 °K | 2x2963     | T = 12°       |

IP20 ⓘ ⓘ CE ▽

220-240V G53 2x50W


3T22.535

Frame

02 ● Black

06 ○ White

# Tim T32

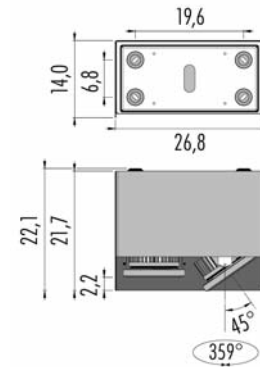

IP20 ©

CE ▼ MC-E-3

220-240V

2x27W

CRI>90

3T32.6  on/off

3T32A6  DALI

3T32B6  Push

3T32C6  1...10V

■ Led color

Nominal lm

▲ Beam spread

2 = 2700 °K

2x2683

L = 60°

3 = 3000 °K

2x2842

S = 24°

4 = 4000 °K

2x2963

T = 12°

IP20 ⓘ Ⓢ

CE ▼

220-240V

G53 2x50W

3T32.535


Frame

02 ● Black

06 ○ White

Tim T25 -T60 - T120 





### Tim T25

|                    |     |            |             |   |   |
|--------------------|-----|------------|-------------|---|---|
| IP20               | ⓘ ⊗ | L = 25,1cm | CE          | ▽ | ⊕ |
| 220-240V           |     | 17W        | CRI>85      |   |   |
| <b>3T25.63L.</b> □ |     | on/off     |             |   |   |
| ■ Led color        |     | Nominal lm | Beam spread |   |   |
| 3000 °K            |     | 2030       | 104°        |   |   |

### Tim T60

|                    |     |                |               |   |   |
|--------------------|-----|----------------|---------------|---|---|
| IP20               | ⓘ ⊗ | L = 60,1cm     | CE            | ▽ | ⊕ |
| 220-240V           |     | 34W            | CRI>85        |   |   |
| <b>3T60.63L.</b> □ |     | on/off         |               |   |   |
| <b>3T60A63L.</b> □ |     | DALI           |               |   |   |
| <b>3T60G63L.</b> □ |     | Push - 1...10V |               |   |   |
| ■ Led color        |     | Nominal lm     | ▲ Beam spread |   |   |
| 3000 °K            |     | 4120           | 104°          |   |   |

### Tim T120


|                     |     |                |               |   |   |
|---------------------|-----|----------------|---------------|---|---|
| IP20                | ⓘ ⊗ | L = 120,1cm    | CE            | ▽ | ⊕ |
| 220-240V            |     | 68W            | CRI>85        |   |   |
| <b>3T120.63L.</b> □ |     | on/off         |               |   |   |
| <b>3T120A63L.</b> □ |     | DALI           |               |   |   |
| <b>3T120G63L.</b> □ |     | Push - 1...10V |               |   |   |
| ■ Led color         |     | Nominal lm     | ▲ Beam spread |   |   |
| 3000 °K             |     | 8240           | 104°          |   |   |

|      |       |
|------|-------|
| □    | Frame |
| 02 ● | Black |
| 06 ○ | White |



*Tim T124 - T196*



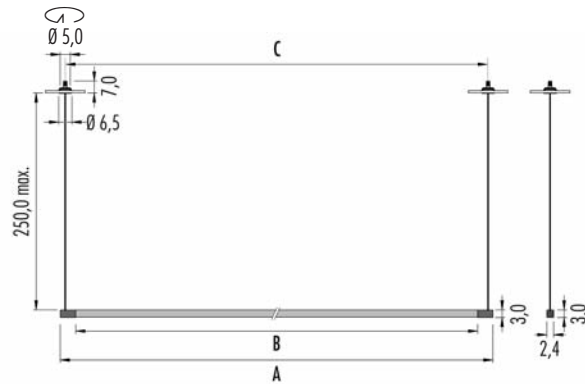

**Tim T124 ARC** recessed canopy for plasterboard ceiling

IP20 ⓘ CE ▽ ⓘ


220-240V 2x26W CRI>85

**3TA1.43L.□**

double switches up and down

A = 124cm B = 108,4cm C = 119cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000°K    | 2x2350     | 106°        |

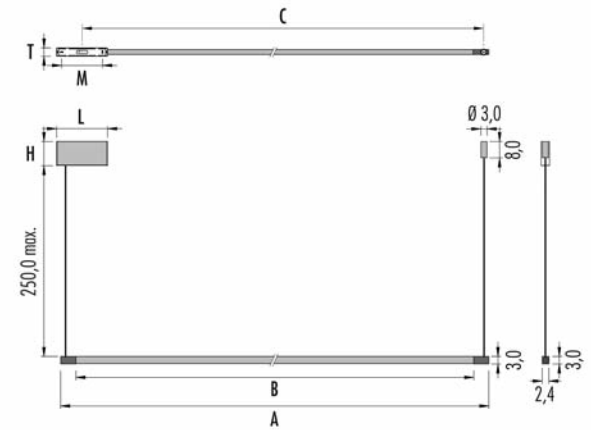

**Tim T124 CUP** external canopy

IP20 ⓘ CE ▽ ⓘ

220-240V 2x26W CRI>85

**3TC1.43L.□**

singular switch up and down - dimmable on request

A = 124cm B = 108,4cm C = 110,4cm

L = 24,0cm H = 8,6cm T = 4,1cm M = 19,0cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000°K    | 2x2350     | 106°        |

**Tim T196 ARC** recessed canopy for plasterboard ceiling

IP20 ⓘ CE ▽ ⓘ

220-240V 2x43W CRI>85

**3TA2.43L.□**

double switches up and down

A = 196cm B = 180,4cm C = 191cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000°K    | 2x3915     | 106°        |

**Tim T196 CUP** external canopy

IP20 ⓘ CE ▽ ⓘ

220-240V 2x43W CRI>85

**3TC2.43L.□**

singular switch up and down

A = 196cm B = 180,4cm C = 182,4cm

L = 28,0cm H = 13,6cm T = 4,7cm M = 23,5cm

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 3000°K    | 2x3915     | 106°        |

**3KIT.024.DIM**

Dimmable option:  
DALI - Push - 1...10V  
Remote installation - need 2 unit to order


| □    | Frame | ARC canopy | CUP canopy | cable |
|------|-------|------------|------------|-------|
| 02 ● | Black | White      | Black      | Black |
| 06 ○ | White | White      | White      | White |

Time delivery: 25 Working Days

Wally 01 *Dynamic* Ø 12,5



- |      |              |
|------|--------------|
| □    | <i>Frame</i> |
| 02 ● | Black        |
| 06 ○ | White        |



IP20 MC-E=3   
 350 - 500 m/A CRI>90  
**3W01D.5**

© (m-M) **LED 12,5W** 350m/A

**3KIT.350.1L** (1-1) on/off  
**3KIT.351.40** (1-3) DALI - Push - 1...10V  
**3KIT.352.15** (1-1) DALI  
**3KIT.353.15** (1-1) Push - 1...10V  
**3KIT.354.18** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1792       | M = 50°     |
| 3 = 3000 °K | 1876       | S = 24°     |
| 4 = 4000 °K | 1938       |             |

© (m-M) **LED 18,4W** 500m/A

**3KIT.500.1L** (1-1) on/off  
**3KIT.501.50** (1-3) DALI - Push - 1...10V  
**3KIT.502.20** (1-1) DALI  
**3KIT.503.20** (1-1) Push - 1...10V  
**3KIT.504.20** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2494       | M = 50°     |
| 3 = 3000 °K | 2611       | S = 24°     |
| 4 = 4000 °K | 2697       |             |

Emergency unit: (inverter + battery. Driver not included)

**3KIT.900.01** (1-1) 1:00 hour/ora  
**3KIT.900.03** (1-1) 3:00 hours/ore

Housing for plasterboard Ø 14,0cm


- **1Z00.125.01** Single
- **1Z00.125.2L** Double
- **1Z00.125.3L** Triple

Housing for brickwork

- **1M00.125.01**

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.

# Wally Ring Dynamic Ø 13,1



- Frame

---

- 02  Black
- 06  White

IP20 MC-E=3   
 350 - 500 m/A CRI>90

**3WR1D.5**

(m-M) **LED 12,5W** 350m/A

- 3KIT.350.1L** (1-1) on/off
- 3KIT.351.40** (1-3) DALI - Push - 1...10V
- 3KIT.352.15** (1-1) DALI
- 3KIT.353.15** (1-1) Push - 1...10V
- 3KIT.354.18** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1792       | M = 50°     |
| 3 = 3000 °K | 1876       | S = 24°     |
| 4 = 4000 °K | 1938       |             |

(m-M) **LED 18,4W** 500m/A

- 3KIT.500.1L** (1-1) on/off
- 3KIT.501.50** (1-3) DALI - Push - 1...10V
- 3KIT.502.20** (1-1) DALI
- 3KIT.503.20** (1-1) Push - 1...10V
- 3KIT.504.20** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2494       | M = 50°     |
| 3 = 3000 °K | 2611       | S = 24°     |
| 4 = 4000 °K | 2697       |             |

Emergency unit: (inverter + battery. Driver not included)


- 3KIT.900.01** (1-1) 1:00 hour/ora
- 3KIT.900.03** (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.

## Wally Ring Pull Ø 12,5 cm



- Frame
- 02 ● Black
- 06 ○ White



IP20 MC-E=3   
 350 - 500 m/A CRI>90  
**3WR1P.5**

© (m-M) **LED 12,5W** 350m/A

**3KIT.350.1L** (1-1) on/off  
**3KIT.351.40** (1-3) DALI - Push - 1...10V  
**3KIT.352.15** (1-1) DALI  
**3KIT.353.15** (1-1) Push - 1...10V  
**3KIT.354.18** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 1792       | M = 50°     |
| 3 = 3000 °K | 1876       | S = 24°     |
| 4 = 4000 °K | 1938       |             |

© (m-M) **LED 18,4W** 500m/A

**3KIT.500.1L** (1-1) on/off  
**3KIT.501.50** (1-3) DALI - Push - 1...10V  
**3KIT.502.20** (1-1) DALI  
**3KIT.503.20** (1-1) Push - 1...10V  
**3KIT.504.20** (1-1) IGBT - TRIAC

| Led color   | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2 = 2700 °K | 2494       | M = 50°     |
| 3 = 3000 °K | 2611       | S = 24°     |
| 4 = 4000 °K | 2697       |             |

Emergency unit: (inverter + battery. Driver not included)


**3KIT.900.01** (1-1) 1:00 hour/ora  
**3KIT.900.03** (1-1) 3:00 hours/ore

(m-M) = min. Led unit - Max Led unit.  
 Led and Emergency unit, warranty only when used  
 together with driver bought from Oty srl.


# Wally 07 Pull Ø 12,5



- Frame
- 02  Black
- 06  White

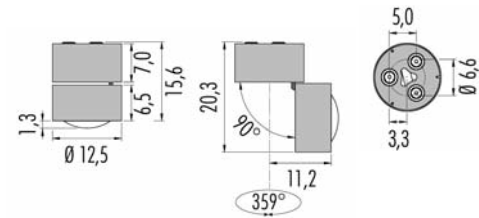

|                  |  |                    |        |
|------------------|--|--------------------|--------|
| IP20             | ©  | CE                 | MC-E=3 |
| 220-240V         | 18W  | CRI>90             |        |
| 3W07P .5         | <input checked="" type="checkbox"/> <input type="checkbox"/> | IGBT Triac         |        |
| 3W07PA5          | <input checked="" type="checkbox"/> <input type="checkbox"/> | DALI               |        |
| 3W07PG5          | <input checked="" type="checkbox"/> <input type="checkbox"/> | Push - 1...10V     |        |
| <b>Led color</b> | <b>Nominal lm</b>  | <b>Beam spread</b> |        |
| 2 = 2700 °K      | 1792   | M = 50°            |        |
| 3 = 3000 °K      | 1876   | S = 24°            |        |
| 4 = 4000 °K      | 1938   |                    |        |

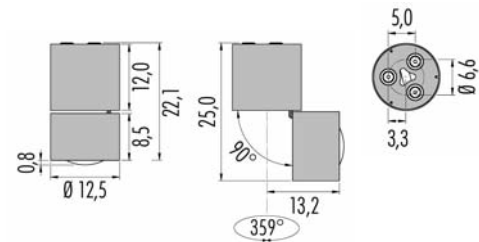


|                  |  |                    |        |
|------------------|--|--------------------|--------|
| IP20             | ©  | CE                 | MC-E=3 |
| 220-240V         | 26W  | CRI>90             |        |
| 3W07P .6         | <input checked="" type="checkbox"/> <input type="checkbox"/> | on/off             |        |
| 3W07PA6          | <input checked="" type="checkbox"/> <input type="checkbox"/> | DALI               |        |
| 3W07PG6          | <input checked="" type="checkbox"/> <input type="checkbox"/> | Push - 1...10V     |        |
| <b>Led color</b> | <b>Nominal lm</b>  | <b>Beam spread</b> |        |
| 2 = 2700 °K      | 3374   | M = 50°            |        |
| 3 = 3000 °K      | 3533   | S = 24°            |        |
| 4 = 4000 °K      | 3649   |                    |        |


# Wally 16 Pull Ø 12,5 for 230 voltage 3 circuit Eutrac



- Frame
- 02 ● Black
- 06 ○ White

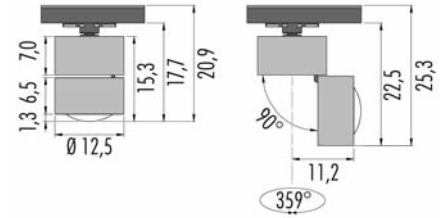

|                           |            |               |        |
|---------------------------|------------|---------------|--------|
| IP20                      | ©          | CE            | MC-E=3 |
| 220-240V                  | 18W        | CRI>90        |        |
| <b>3W16P.5</b> IGBT Triac |            |               |        |
| ■ Led color               | Nominal lm | ▲ Beam spread |        |
| 2 = 2700 °K               | 1792       | M = 50°       |        |
| 3 = 3000 °K               | 1876       | S = 24°       |        |
| 4 = 4000 °K               | 1938       |               |        |

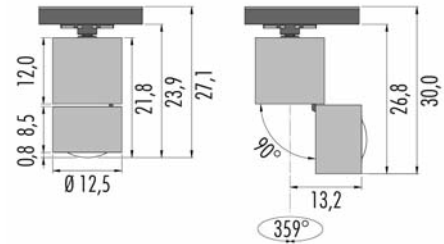


|                           |            |               |        |
|---------------------------|------------|---------------|--------|
| IP20                      | ©          | CE            | MC-E=3 |
| 220-240V                  | 26W        | CRI>90        |        |
| <b>3W16P.6</b> IGBT Triac |            |               |        |
| ■ Led color               | Nominal lm | ▲ Beam spread |        |
| 2 = 2700 °K               | 3374       | M = 50°       |        |
| 3 = 3000 °K               | 3533       | S = 24°       |        |
| 4 = 4000 °K               | 3649       |               |        |



*X-Running*



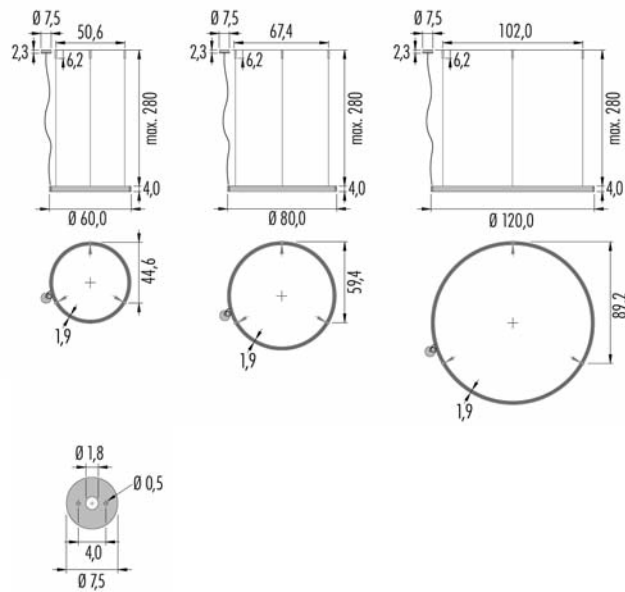

### R06 Ø 60,0

Electronic Gear in remote position

IP40 ⓘ Ⓢ Ⓡ Ⓢ

24V 88W CRI>90

**3R06.4** ■ L. □ on/off

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2700 °K     | 6552       | 44°         |
| 3000 °K     | 7280       |             |

**3KIT.E24.DIM**

Dimmable option:  
DALI - Push - 1...10V

□ Frame

02 ● Black

06 ○ White

Available from 15/10/2019

### R08 Ø 80,0

Electronic Gear in remote position

IP40 ⓘ Ⓢ Ⓡ Ⓢ

24V 126W CRI>90

**3R08.4** ■ L. □ on/off

| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2700 °K     | 9432       | 44°         |
| 3000 °K     | 10480      |             |

**3KIT.E24.DIM**

Dimmable option:  
DALI - Push - 1...10V

### R12 Ø 120,0

Electronic Gear in remote position

IP40 ⓘ Ⓢ Ⓡ Ⓢ

24V 184W CRI>90

**3R12.4** ■ L. □ on/off






| ■ Led color | Nominal lm | Beam spread |
|-------------|------------|-------------|
| 2700 °K     | 13752      | 44°         |
| 3000 °K     | 15280      |             |

**3KIT.E24.DIM**

Dimmable option:  
DALI - Push - 1...10V

*X-Running*



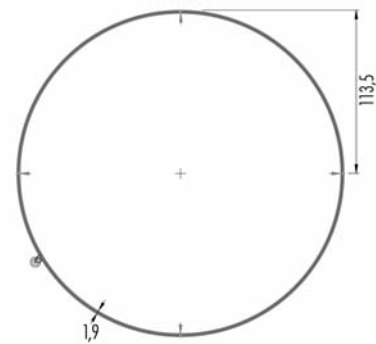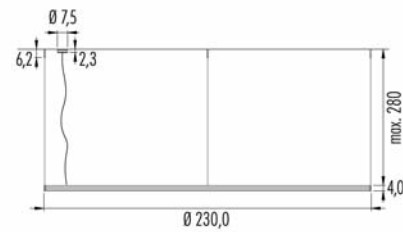

### R18 Ø 180,0

Electronic Gear in remote position

IP40



24V

270W

CRI>90

**3R18.4**  L.  on/off - 1...10V

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 2700 °K   | 20232      | 44°         |
| 3000 °K   | 22480      |             |

Dimmable option:

**3KIT.D24.DIM** DALI - Push - 1...10V

### R23 Ø 230,0

Electronic Gear in remote position

IP40



24V

347W

CRI>90

**3R23.4**  L.  on/off - 1...10V

| Led color | Nominal lm | Beam spread |
|-----------|------------|-------------|
| 2700 °K   | 26028      | 44°         |
| 3000 °K   | 28920      |             |

Dimmable option:

**3KIT.D24.DIM** DALI - Push - 1...10V

Frame

**02**  Black

**06**  White

Available from 15/10/2019


# Zip 90 ROS



- Frame

---

- 3  Aluminium painted
- 6  White painted



IP20


---

220V ÷ 240V GU10 max 50W  
**3ZIP90GU10**  P = 8,0cm

IP20

---

12V GU5.3 max 50W  
**3ZIP90GU5.3**  P = 8,0cm  
**3KIT.201.050** max 50VA  
 dimmable gear: IGBT



Housing for Brickwork ONLY for ZIP 90 - ZIP 45


**1ZIP - Z** one unit  
**1ZIP - Zx10** ten units



Glass for ZIP 90 - ZIP 60 - ZIP 45

**2ZIP - V** one unit  
**2ZIP - Vx10** ten units

## Zip 60 ROS



Zip 60 only for plasterboard

IP20



220V ÷ 240V **GU10** max 50W

**3ZIP60GU10**  *P = 9,5cm*


IP20



12V **GU5.3** max 50W

**3ZIP60GU5.3**  *P = 8,5cm*

**3KIT.201.050** *max 50VA*  
*dimnable gear: IGBT*

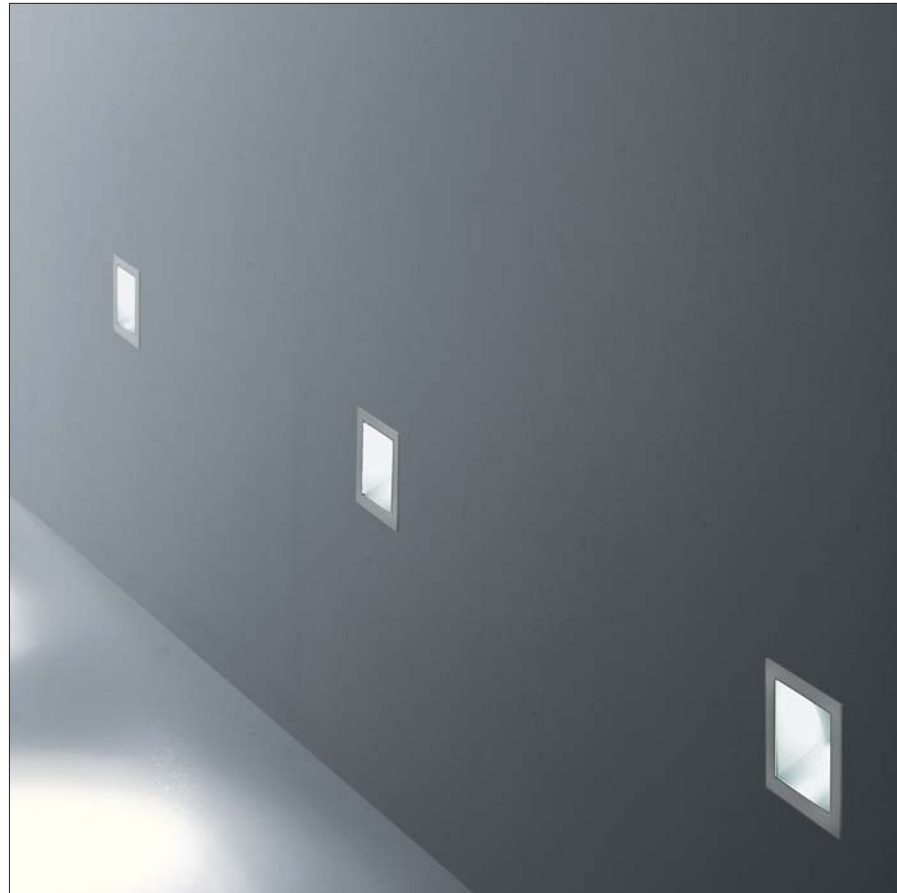



---


## *Appendix*

- Filo System: configurations and geometries*
- Housings for plasterboard and brickwork*
- Mounting instructions for housings*




## Filo System: configurations

Example 1

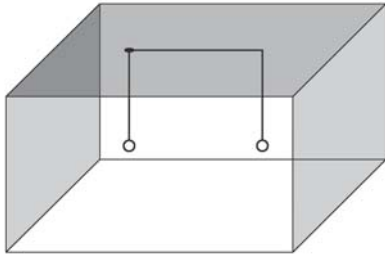


2 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: CUP  
1 x Kit: KIT.WM5.02

Example 2

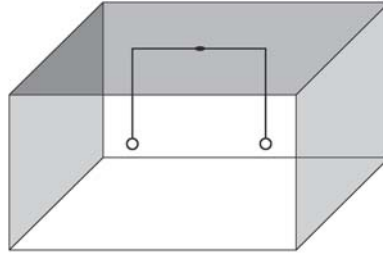


2 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: CUP  
1 x Kit: KIT.WM5.02

Example 3

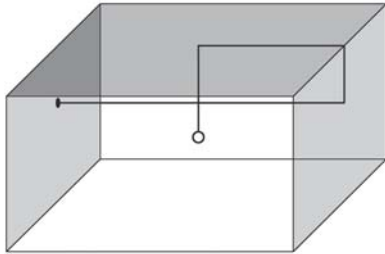


1 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: ARC or CUP  
1 x Kit: KIT.WM5.02

Example 4

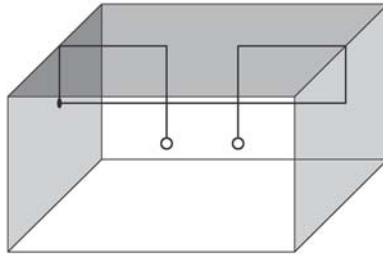


2 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: CUP  
1 x Kit: KIT.WM5.02

Example 5

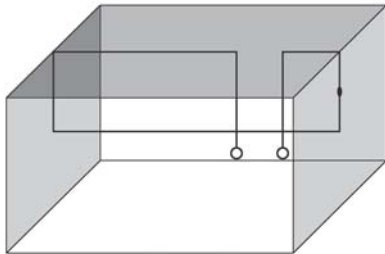


2 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: CUP  
1 x Kit: KIT.WM8.02

Example 6

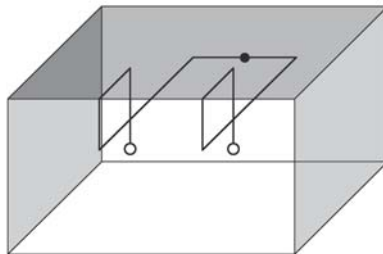

2 x Diffuser:  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon  
1 x Canopy: CUP  
1 x Kit: KIT.WM8.02


Example 7

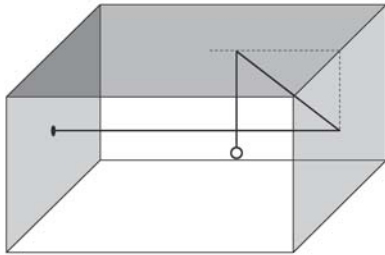

**1 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**1 x Canopy:**      **1 x Kit:**  
ARC or CUP            KIT.WM5.02


Example 8

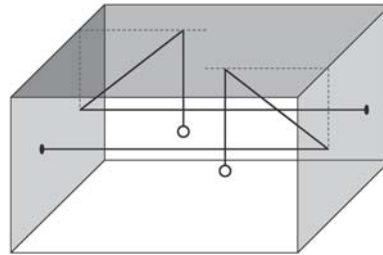

**2 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**2 x Canopy:**      **1 x Kit:**  
ARC or CUP            KIT.WM5.02


Example 9

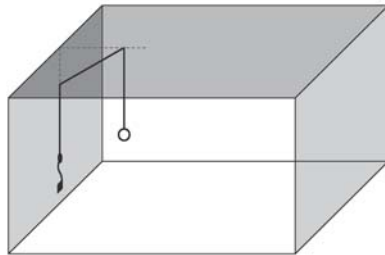

**1 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**1 x Canopy:**      **1 x Kit:**  
CUP with Plug-in      KIT.WM5.02


Example 10

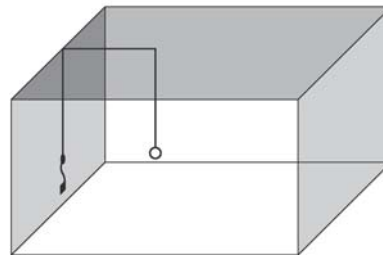

**1 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**1 x Canopy:**      **1 x Kit:**  
CUP with Plug-in      KIT.WM5.02


Example 11

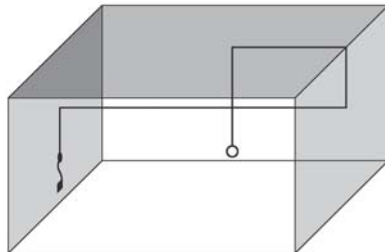

**1 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**1 x Canopy:**      **1 x Kit:**  
CUP with Plug-in      KIT.WM5.02

Example 12

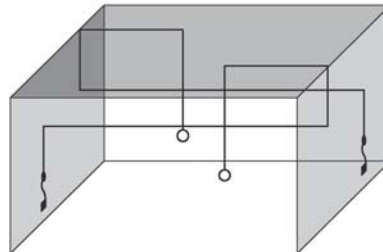

**2 x Diffuser:**  
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**2 x Canopy:**      **1 x Kit:**  
CUP with Plug-in      KIT.WM8.02

---

## *Filo System: wall geometries*

**1 x Diffuser:**

Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

**1 x Canopy:**

ARC or CUP or CUP with Plug-in

**1 x Kit:**


KIT.WM5.02 or KIT.WM8.02






**Z00.030.01/N00.030.01**  
Housing for plasterboard

Pop P00 Ø 3,0



**1Z00.030.01**  
Ø 4,0 cm


Pop P00 NaNo Ø 3,0



**1N00.030.01**  
Ø 4,0 cm

**M00.030.01**  
Housing for brickwork

Pop P00 Ø 3,0




**1M00.030.01**



**Z00.040.01**  
Housing for plasterboard

Pop P01 Ø 4,0




**1Z00.040.01**  
Ø 5,1 cm




**Z00.055.01**  
Housing for plasterboard

POP P01 Ø 5,5  
 POP P01 NaNo Ø 5,5  
 POP P01 Bulb Ø 6,0  
 POP P01 Bulb Ø 9,5  
 POP P02 Ø 5,5



**1Z00.055.01**  
Ø 6,5 cm




**1M00.055.01**




**Z00.060.01**  
Housing for plasterboard


Pop P03 Ø 6,0  
 Pop P03 NaNo Ø 6,0




**1Z00.060.01**  
Ø 7,6 cm



**1Z00.055.01**



**1Z00.055.2L**



**1Z00.055.3L**




Pop P03 Ø 8,0

**Z00.080.01**

Housing for plasterboard

- Pop P03 Ø 8,0
- Pop P03 NaNo Ø 8,0
- Pop P04 Ø 8,0
- Pop P12 Ø 3,0




**1Z00.080.01**  
 Ø 9,5 cm

**M00.080.01**

Housing for brickwork

- Pop P03 Ø 8,0
- Pop P03 NaNo Ø 8,0
- Pop P12 Ø 3,0



**1M00.080.01**




Pop PX3 Ø 10,0


**Z00.100.01**

Housing for plasterboard

- Pop PX3 Ø 10,0
- Pop PX3 NaNo Ø 10,0
- Pop PY3 Ø 10,0
- Pop PY3 NaNo Ø 10,0
- Pop PZ3 Ø 10,0



**1Z00.100.01**





Pop P12 Ø 7,0

**Z00.120.01**  
Housing for plasterboard

**M00.070.01**  
Housing for brickwork



Pop P01 Dynamic Ø 12,5


**Z00.125.01**  
Housing for plasterboard

**M00.125.01**  
Housing for brickwork


Pop P04 Ø 12,0  
Pop P12 Ø 7,0  
Pop P12 Ø 12,5

Pop P122 Brooklin Arc  
Pop P202 Brooklin Arc


Pop P01 Static Ø 12,5  
Pop P01 Dynamic Ø 12,5  
Wally W01 Dynamic Ø 12,5




**1Z00.120.01**  
Ø 14,0 cm





**1M00.120.01**



**1Z00.125.01**  
Ø 14,0 cm



**1M00.125.01**







Pop P03 Ø 17,0


**Z00.170.01**

Housing for plasterboard


**M00.170.01**

Housing for brickwork


- Pop P03 Ø 17,0
- Pop P03 Static Ø 17,0
- Pop P03 Wall Wash Ø 17,0
- Pop P03 Look Ø 17,0



**1Z00.170.01**  
 ↻ Ø 19,0 cm



**1M00.170.01**




easy Pop X3 Ø 10,0

**Easy POP**


Housing for brickwork

- Easy Pop P00 Ø 3,0
- Easy Pop P00 NaNo Ø 3,0
- Easy Pop P01 Ø 4,0


- Easy Pop P01 Ø 5,5
- Easy Pop P01 NaNo Ø 5,5
- Easy Pop P01 Bulb
- Easy Pop P02 Ø 5,5



**1E00.030.01**




**1E00.040.01**




**1E00.055.01**

- Easy Pop P03 Ø 8,0
- Easy Pop P03 NaNo Ø 8,0
- Easy Pop P04 Ø 8,0

- Easy Pop PX3 Ø 10,0
- Easy Pop PX3 NaNo Ø 10,0
- Easy Pop PY3 Ø 10,0
- Easy Pop PY3 NaNo Ø 10,0
- Easy Pop PZ3 NaNo Ø 10,0



**1E00.080.01**




**1E00.100.01**



**W00.085.01**  
Housing for plasterboard

Pop P04A Magic  
Pop P04B Magic




1W00.085.01



**W00.125.01**  
Housing for plasterboard

Pop P04C Magic  
Pop P12/L Ø 3,0




1W00.125.01



**K00.170.01**  
Housing for plasterboard

Pop P03 Look




**1K00.170.01**  
Ø 19,0 cm



**M00.067.01**  
Housing for brickwork

Pop P05 Ø 6,7




**1M00.067.01**

Pop P05 Ø 6,7 For brickwork

**M00.082.01**  
Housing for brickwork

Pop P05 Ø 8,2



**1M00.082.01**




**Z00.070.01**  
Housing for plasterboard

**M00.070.01**  
Housing for brickwork




**Z00.043.01**  
Housing for plasterboard

Pop P10




1Z00.070.01









1M00.070.01

Pop P11



1Z00.043.0

## Pop installation on plasterboard




- 1) once pointed the position of the lamp mark the fixing holes for the housing
- 2) make the hole for the housing and the holes for the fixing rawlplugs
- 3) fix the screws of the housing to the ceiling plasterboard
- 4) apply the proper grasping net
- 5) plaster and trim the compensating 2 mm gap
- 6) keep clean the inside of the housing

Z00.030.01  
Z00.040.01  
Z00.055.XX  
Z00.060.01  
Z00.080.XX  
Z00.120.XX  
Z00.125.XX  
Z00.170.XX  
K00.170.01  
Z00.070.01  
Z00.043.01

## Pop installation on brickwork


Form a recess in the ceiling for the brickwork housing.  
Insert the power cables in to the brickwork housing and complete the ceiling with plaster finish.  
Keep the inside brickwork housing clean. Install the item into the housing.

M00.030.01  
M00.055.01  
M00.080.01  
M00.120.01  
M00.125.01  
M00.170.01  
M00.070.01









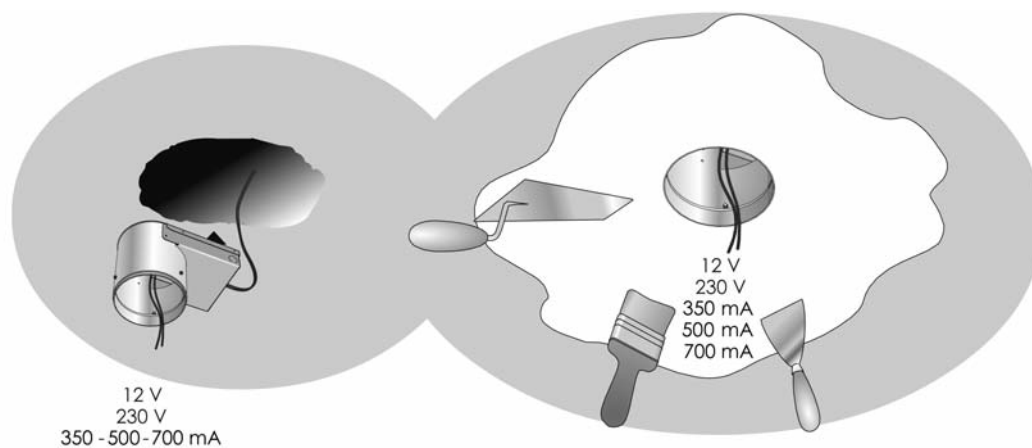


Pop 04 Magic 25/40/120 h.

Code:  
W00.085.01 (P04A - P04B)  
Housing for plasterboard












Code:  
W00.125.01 (P04C)  
Housing for plasterboard  
Gehäuse für Gipskarton



- 1) Once pointed the position of the lamp, make the hole for the housing.
- 2) Place the housing on the side of the plasterboard plate that will remain invisible after the work is done.
- 3 - 4) Put some metal profiles to fix and reinforce the area of the housing.
- 5) Fix with screws, the housing to the plasterboard and to the reinforcement profiles.
- 6 - 7) Complete the false ceiling, plaster and trim.
- 8) Keep clean the inside of the housing.

## Pop 12 L 120 h.

Code: W00.125.01 (P12L)  
Housing for plasterboard












- 1) Once pointed the position of the lamp, make the hole for the housing.
- 2) Place the housing on the side of the plasterboard plate that will remain invisible after the work is done.
- 3 - 4) Put some metal profiles to fix and reinforce the area of the housing.
- 5) Fix with screws, the housing to the plasterboard and to the reinforcement profiles.
- 6 - 7) Complete the false ceiling, plaster and trim.
- 8) Keep clean the inside of the housing.



## Pop 10 installation on plasterboard


Code: Z00.070.01  
Housing for plasterboard




- 1) Once pointed the position of the lamp, mark with the given shape the entry hole and the fixing holes for the housing.
- 2) Make the hole for the housing and the holes for the fixing dowels.
- 3) Adjust the inside edge of the housing entry hole to allow the element installation at 45°.
- 4) Put the housing into the hole with a move at nearly 45° compared to the fixing surface.
- 5) Fix the housing to the ceiling or wall plasterboard with the screws.
- 6) Apply the proper grasping net.
- 7) Plaster and trim compensating the 1 mm gap.
- 8) Keep clean the inside of the housing.

## Pop 10 installation on brickwork

Code: **M00.070.01**  
Housing for brickwork












Form a recess in the ceiling for the brickwork housing.  
Insert the power cables in to the brickwork housing and complete the ceiling with plaster finish.  
Keep the inside brickwork housing clean.  
Install the item into the housing.

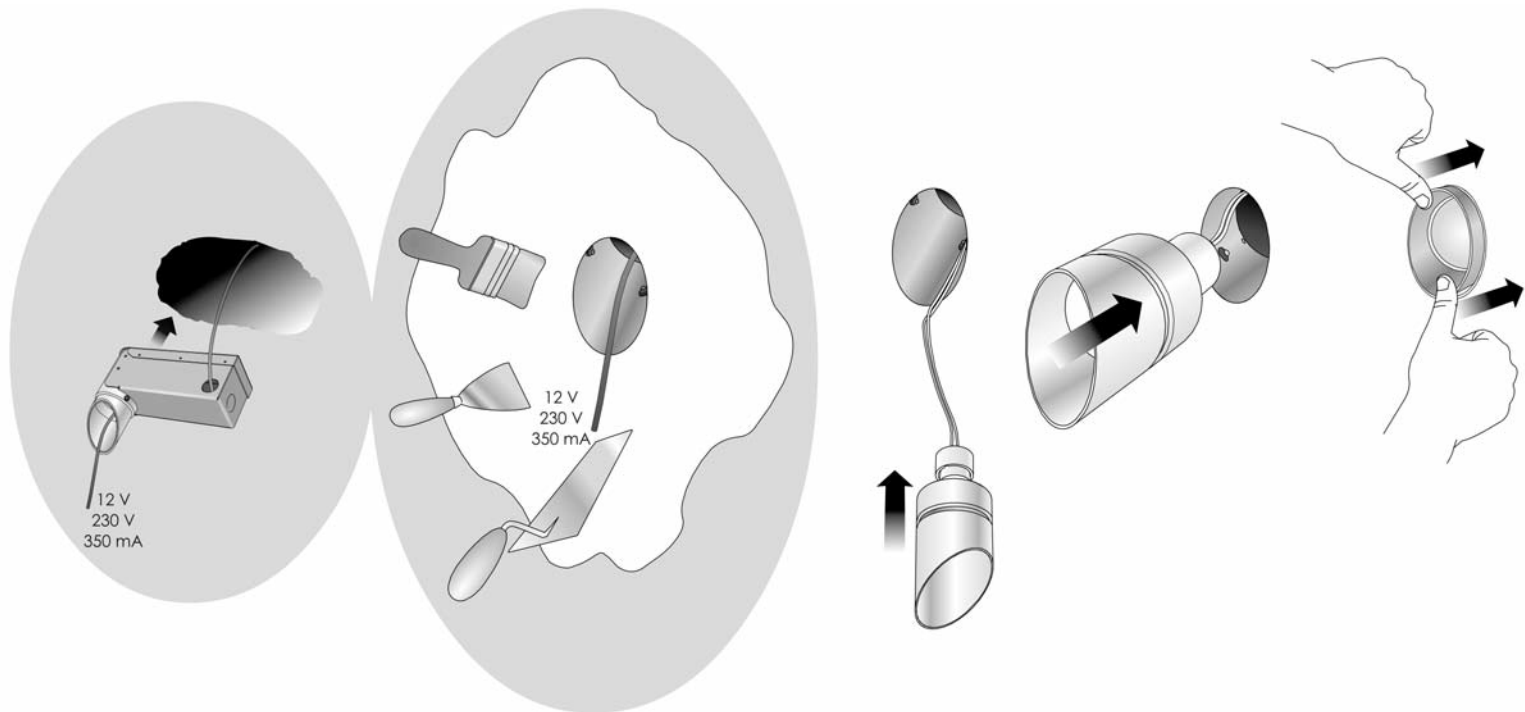



## Pop 11 installation on plasterboard

Code:  
Z00.043.01  
Housing for plasterboard




## Bic installation on plasterboard


**Z07.070.01**  
Housing for plasterboard




**BIC B07**

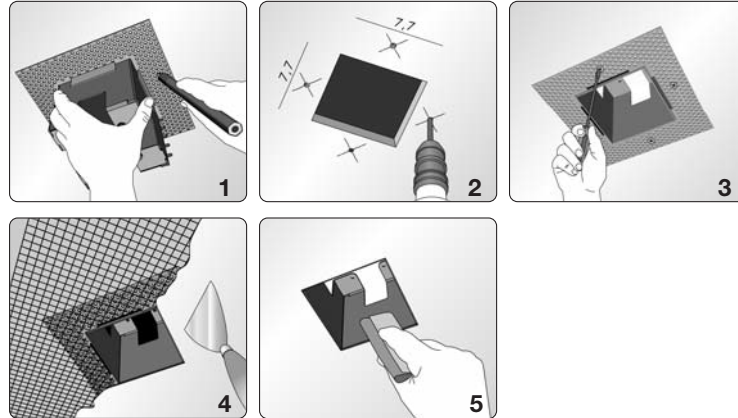


**Z12.120.01**  
Housing for plasterboard





**BIC B12**





**Z08.016.01**  
Housing for plasterboard




**BIC B16**

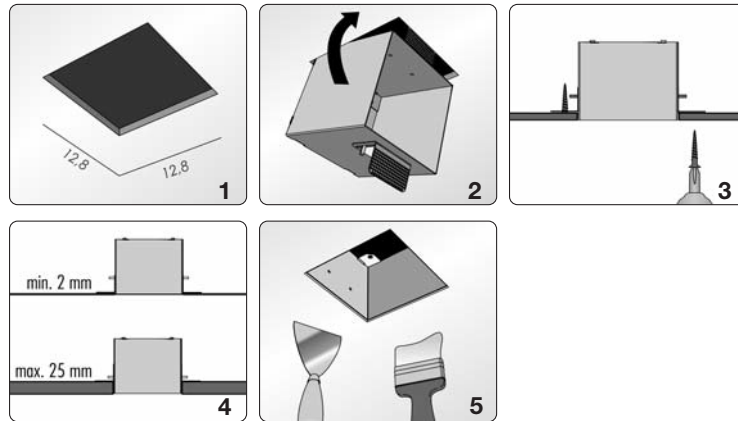

**Z0B.025.01 - Z0B.050.01 - Z0B.060.01 - Z0B.120.01**


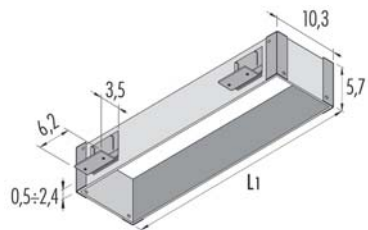


**BIC B25** L1= 25,8  
**BIC B50** L1= 50,8  
**BIC B60** L1= 60,8  
**BIC B120** L1= 120,8

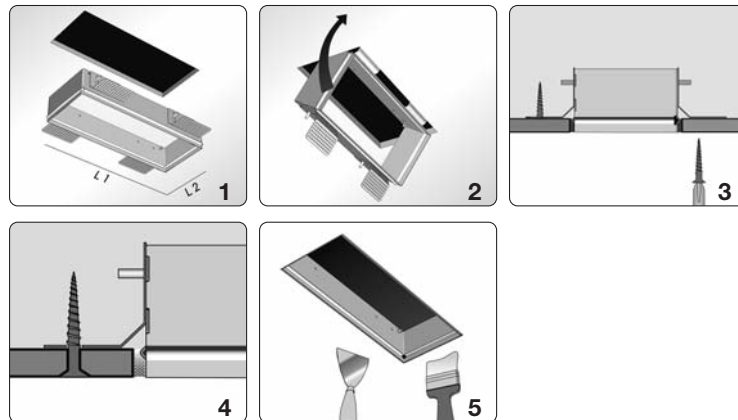



*Easy Pop installation on plasterboard: Pop P03/PX3/PY3/PZ3*





Drill the ceiling with a cutter corresponding to the diameter.

Bend contemporarily the springs (2) of the housing (1) to put it into the hole.

Unscrew the screw (4) of the lamp body.

Using the screw (4), fix the lamp body (3) to the safety anti-fall cable (5).

Make the connection of the spot light to the remote gear.






Put the body of the lamp (3) into element (1) with the **CLICK UP**.

Adjust element (6) as required.



To replace the LED light bulb, gently remove the body of the lamp (3) **DOWN**.

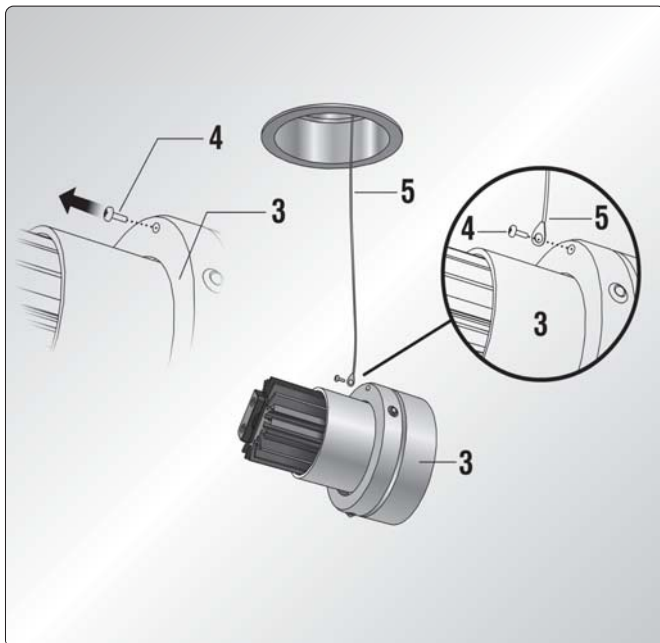

## Vademecum

### MC-E

MacAdams step:

é un parametro attraverso il quale si definisce il grado di decadimento del colore della luce di una sorgente led nel tempo.  
Lo step 3 rappresenta ad oggi il livello di decadimento più basso.

it is a parameter which defines the deterioration degree of the colour of the light coming from a led source during its life.  
Step 3 is nowadays the lower deterioration level.

es ist ein Parameter, der der Verschlechterungsgrad der Lichtfarbe eines Led Leuchtmittels während seines Lebens bestimmt.  
Step 3 ist heutzutage das niedrigste Verschlechterungsniveau.

Est un paramètre avec le quel on défini le degré de détérioration de la couleur de la lumière d'une source led dans le temps.  
Aujourd'hui le Step 3 est le niveau de détérioration le plus bas.

el es un parámetro que define el grado de deterioración del color de la luz de una fuente led en el tiempo. El step 3 representa hoy el nivel de deterioración más bajo.

### CRI

Indice di resa cromatica di una sorgente luminosa, e misura di quanto naturali appaiano i colori degli oggetti da essa illuminati.

Colour Rendering Index of a light source and measure indicating how natural the colours of objects appear when enlightened from it.

Farbwiedergabeindex einer Lichtquelle und Maß, das, wie nach der Natur die Farben der Objekten sich herausstellen, wenn sie von dieser Lichtquelle beleuchtet sind, anzeigt.

Indice de rendu des couleurs d'une source lumineuse et mesure qui indique la pureté des couleurs des objets éclairés par cette source.

Indice de rendimiento lumínico de una fuente luminosa, y medida de lo natural del color de los objetos iluminados con dicha fuente.

### lm

Il lumen è l'unità di misura del flusso luminoso di una sorgente luminosa.  
Lumen is the unit of the light flux of a light source.

Lumen ist ein Maß der Strahlengang einer Lichtquelle.

Le lumen est l'unité de mesure du flux d'éclairage d'une source lumineuse.

El lumen es la unidad de medida del flujo luminoso de una fuente luminosa.

### lx

Il lux è l'unità di misura per l'illuminamento di un'area piana.  
Un lux è pari a un lumen fratto un metro quadrato.

Lux is the unit for the lighting of a flat area. One lux is equal to one lumen divided per one square meter.

Lux ist ein Maß für die Beleuchtung einer ebenen Oberfläche.  
Ein lux ist gleich ein lumen geteilt durch einen quadratischen Meter.

Le lux est l'unité de mesure pour l'illumination d'une zone plane.  
Un lux correspond à un lumen divisé par mètre carré.

El lux es la unidad de medida de iluminación de una superficie.  
Un lux es equivalente a un lumen por metro cuadrado.



Classe I: Le componenti elettriche accessibili sono collegate ad un conduttore di terra.

Class I: Only basic insulation, accessible conductors are earthed. Earthing compulsory.

Klasse I: Grundisolation leitenden; berührbare Metallteile sind mit Schutzerdung verbunden. Schutzerdung vorgeschrieben.

Classe I: Seulement isolation de base, les parties conductrices accessibles sont reliées à un conducteur terre.  
Mise à la terre obligatoire.

Clase I: Sólo aislamiento fundamental; además, las partes conductoras accesibles están conectados a un conductor de tierra. Puesta a tierra indispensable.



Classe II: Messa a terra esclusa, sostituita da cavi elettrici con un isolamento rinforzato.

Class II: basic insulation plus second insulation or both are replaced by reinforced insulation. Earthing excluded

Klasse II: Entweder zu der Grundisolation kommt noch eine zweite Isolierung hinzu oder ist eine verstrebtten Isolierung vorgesehen.

Classe II: Soit à l'isolation, soit ces deux dernières sont remplacées par une isolation renforcée.  
Mise à la terre: excluse.

Clase II: Al aislamiento fundamental se añade un segundo aislamiento, o bien los dos aislamientos se reemplazan por un aislamiento reforzado.



Classe III: Alimentazione a bassa tensione, inferiore a 50V-50Hz.  
Messa a terra non prevista.

Class III: Low tension inferior to 50V-50Hz. No ground cable.

Klasse III: Niedervolt < 50V-50 Hz, ohne Erdung

Classe III: Alimentation de sécurité à basse tension.  
Ne doit en aucun cas être utilisée pour des tensions supérieures à 50V-50Hz. mise à la terre.

Clase III: Alimentación de baja tensión, inferior a 50V-50Hz.  
Toma de tierra no prevista.



Apparecchio con caratteristiche per il montaggio diretto su superfici normalmente infiammabili (EN 60 598/VDE 0711).

Device which can be mounted on flammable surfaces (EN 60 598/VDE 0711).

Aparato con características para el montaje directo sobre superficies normalmente inflamables (EN 60 598/VDE 0711).



Prodotto conforme alle direttive europee.

Products complying with the Eur. Comm. rules.

Produkt gemaess den EU-Normen.

Producido conforme a las directivas europeas.

## IP identification

- Ⓒ** Driver incluso  
Driver included  
Treiber mitgeliefert  
Driver fourni  
Driver incluido
- Ⓒ** Driver non incluso  
Driver not included  
Treiber nicht mitgeliefert  
Driver non fourni  
Driver excluido
- Ⓓ** lampadina inclusa  
including bulb  
Leuchtmittel inklusiv  
ampoule comprise  
bombilla incluida
- Ⓓ** trasformatore incluso  
transformer included  
Trafo mitgeliefert  
transformateur fourni  
transformador incluido
- Ⓓ** trasformatore non incluso  
transformer not included  
Trafo nicht mitgeliefert  
transformateur non fourni  
transformador excluido
- IP0X** nessuna protezione  
no protection  
kein Schutz  
non protégé  
sin protección
- IP1X** protezione contro corpi estranei  $\geq 50\text{mm}$   
protection against solid objects  $\geq 50\text{mm}$   
Schutz gegen Fremdkörpern  $\geq 50\text{mm}$   
protection contre des corps étrangers  $\geq 50\text{mm}$   
protegido contra objetos extraños  $\geq 50\text{mm}$
- IP2X** protezione contro corpi estranei  $\geq 12\text{mm}$   
protection against solid objects  $\geq 12\text{mm}$   
Schutz gegen Fremdkörpern  $\geq 12\text{mm}$   
protection contre des corps étrangers  $\geq 12\text{mm}$   
protegido contra objetos extraños  $\geq 12\text{mm}$
- IP3X** protezione contro corpi estranei  $\geq 2,5\text{mm}$   
protection against solid objects  $\geq 2,5\text{mm}$   
Schutz gegen Fremdkörpern  $\geq 2,5\text{mm}$   
protection contre des corps étrangers  $\geq 2,5\text{mm}$   
protegido contra objetos extraños  $\geq 2,5\text{mm}$
- IP4X** protezione contro corpi estranei  $\geq 1\text{mm}$   
protection against solid objects  $\geq 1\text{mm}$   
Schutz gegen Fremdkörpern  $\geq 1\text{mm}$   
protection contre des corps étrangers  $\geq 1\text{mm}$   
protegido contra objetos extraños  $\geq 1\text{mm}$
- IP5X** protezione da polvere  
dust-protected  
Staubgeschützt  
protection contre la poussière  
aparato protegido contra el polvo
- IP6X** stagno alla polvere  
dust-proof  
Staubdicht  
hermétique à la poussière  
aparato totalmente protegido contra el polvo
- IPX0** nessuna protezione  
no protection  
kein Schutz  
non protégé  
sin protección
- IPX1** protezione contro caduta acqua verticale  
protected against water drops falling vertically  
Schutz gegen Wassertropfen, die senkrecht herabfallen  
protégé contre les gouttes d'eau tombant verticalement  
protegido contra la caída de gotas de agua
- IPX2** protezione contro caduta di gocce oblique a  $15^\circ$   
protected against water drops max inclination  $15^\circ$   
Schutz gegen Wassertropfen, die senkrecht herabfallen Neigung  $15^\circ$   
protégé contre les gouttes d'eau à inclinaison maximale de max  $15^\circ$   
protegido contra la caída de gotas de agua con inclinación max  $15^\circ$
- IPX3** protezione contro caduta di gocce oblique a  $60^\circ$   
protected against water drops max inclination  $60^\circ$   
Schutz gegen Wassertropfen, die senkrecht herabfallen Neigung  $60^\circ$   
protégé contre les gouttes d'eau à inclinaison de max  $60^\circ$   
protegido contra la caída de gotas de agua con inclinación max  $60^\circ$
- IPX4** protezione contro spruzzi d'acqua  
protected against sprinkling water  
Spritzwassergeschützt  
protégé contre les éclaboussures  
aparato protegido contralasalpicaduras
- IPX5** protezione contro getti d'acqua  
protected against water jets  
Wasserstrahlgeschützt  
protégé contre les gouttes d'eau  
aparato totalmente protegido contra los chorros de agua
- IPX6** protezione contro inondazioni  
Protected against flooding  
Überschwemmunggeschützt  
rotected against flooding  
aparato totalmente protegido contra
- IPX7** protezione per immersione temporanea  
protected against brief immersions  
gegen kurzen Tauchen geschützt  
hermétique à la immersion  
aparato totalmente protegido contra la sumersión
- IPX8** protezione per immersione costante  
protected against long immersion  
Tauchengeschützt  
protégé pour des immersions prolongées  
aparato totalmente protegido contra la larga imersión







A series of horizontal lines for writing, consisting of a solid top line, a dashed midline, and a solid bottom line, repeated down the page.



#### CREDITS

|                        |                                 |
|------------------------|---------------------------------|
| Graphic Concept .....  | Claudio Malvestio               |
| Stylist .....          | Patrizia Toffolo                |
| Images.....            | Studio Fuoco - Franco Dell'Anna |
| Color separation ..... | Artilab                         |
| Printing .....         | Grafiche Gemma                  |
| Copyright .....        | OTY s.r.l.                      |
| Printed in Italy ..... | July - 2019                     |

OTY RESERVES THE RIGHT TO INTRODUCE ANY CHANGES TO ITS OWN MODELS, WITHOUT NOTICE IN ADVANCE. ALL MODELS HAVE BEEN DULY REGISTERED.

OTY SI RISERVA IL DIRITTO DI APPORTARE AL PROPRI MODELLI, SENZ'ALCUN PREAVVISO, QUALSIASI MODIFICA RITENESSE OPPORTUNA. TUTTI I MODELLI SONO DEPOSITATI.

OTY BEHALT SICH DAS RECHT VOR ÄNDERUNGEN VORZUNEHMEN, OHNE SOFORTIGE BENCHRICHTIGUNG. ALLE MODELLE SIND EINGETRAGEN.

OTY SE RÉSERVE LE DROIT D'APPORTER UNE QUELCONQUE MODIFICATION À LES MODÈLES SANS PRÉAVIS. TOUS NOUS MODÈLES SONT DÉPOSÉS.

OTY SE RESERVA EL DERECHO DE REALIZAR CUALQUIER MODIFICACIÓN SOBRE SUS MODELOS SIN PREVIO AVISO. TODOS LOS MODELOS HAN SIDO DEPOSITADOS.

**Oty** s.r.l.  
via Spangaro 8/a  
30030 Peseggia di Scorzé  
(Venezia) Italy

[www.otylight.com](http://www.otylight.com)  
e-mail: [info@otylight.com](mailto:info@otylight.com)  
t. +39 (0)41 5830499  
f. +39 (0)41 5830520