

CENTI DL SLE30

Powered by **SORAA**




CENTI DL SLE30 is a Down Light powered with **Soraa Optical Light Engine SLE-30**. The result is directional light with near perfect light distribution, exquisitely uniform color and smooth, artifact free transitions. Beam angle range is from narrow spot to flood, combined with Soraa Snap System accessories.

External ballast box.

Adjustable 20°

Turnable 360°

Diameter	165 mm
Height	110 mm
Cut out	Ø155 mm
Lumen	950 / 1000
Kelvin	2700K / 3000K
Cri	95
Nominal Power	16,1
Light Source	SORAA LED
Beam angle	9° / 25° / 36° / 60° 10° - 25° / 10°-36° (Oval)
Colours	White/Black

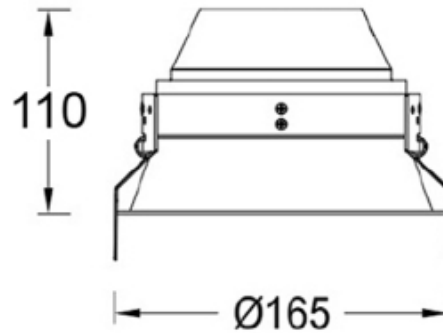

ART	NAME	SOURCE	KELVIN	WATT	COLOUR
74-SR-A239-0021	CENTI DL	SORAA LED	2700K	17W	White
74-SR-A239-0022	CENTI DL	SORAA LED	2700K	17W	Black
74-SR-A239-0031	CENTI DL	SORAA LED	3000K	17W	White
74-SR-A239-0032	CENTI DL	SORAA LED	3000K	17W	Black
74-SR-A239-0041	CENTI DL	SORAA LED	4000K	17W	White
74-SR-A239-0042	CENTI DL	SORAA LED	4000K	17W	Black

Notes:

SWEDLITE