


CENTI SLE30

Powered by **SORAA**



CENTI is powered with **Soraa Optical Light Engine SLE-30**. The result is directional light with near perfect light distribution, exquisitely uniform color and smooth, artifact free transitions. Beam angle range is from narrow spot to flood, combined with Soraa Snap System accessories.

Length	210 mmm
Diameter	100 mmm
Lumen	950 / 1000 / 1050 lm
Kelvin	2700K / 3000K / 4000K
Cri	95
Nominal Power	16,1
Dimming	Dali
Light Source	SORAA LED
Beam angle	9° / 25° / 36° / 60° / 36°+36°(Square) 10° - 60° (Oval) / 10°-36°(Oval)
Colours	White/Black
Option	Barn Door / Honeycomb Louvre

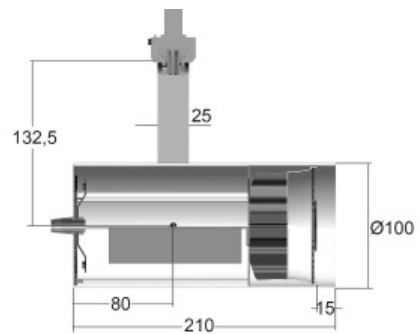

ART	NAME	SOURCE	KELVIN	WATT	COLOUR
74-ST-A248-0201	CENTI	SORAA LED	2700K	17W	White
74-ST-A248-0202	CENTI	SORAA LED	2700K	17W	Black
74-ST-A248-0301	CENTI	SORAA LED	3000K	17W	White
74-ST-A248-0302	CENTI	SORAA LED	3000K	17W	Black
74-ST-A248-0401	CENTI	SORAA LED	3000K	17W	White
74-ST-A248-0402	CENTI	SORAA LED	3000K	17W	Black
74-A-0008	Barndoor				

SWEDLITE